

FED. SUP CLASS
4730

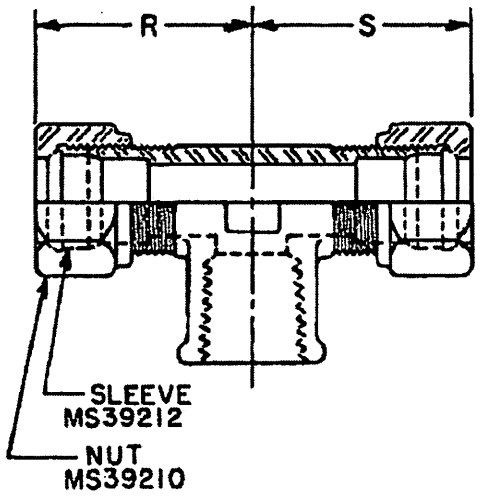

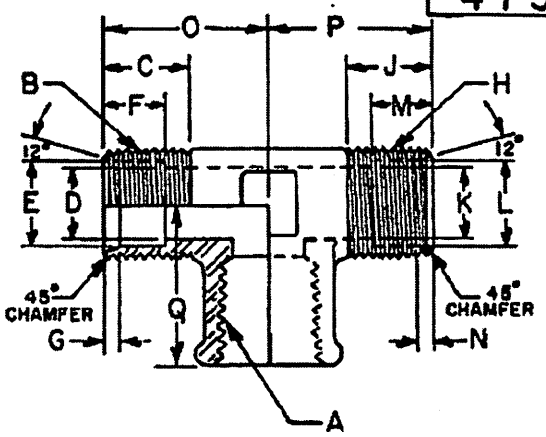

DETAIL OF BODY

DASH NO.	TUBE O.D.		A PIPE THREAD *NPTF	B	C THREAD LENGTH	D	E	F	G	H	J	K	L
1	1/8	1/8	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139
2	3/16	3/16	1/8	3/8 -24UNF-2A	9/32	1/8	.196 .200	1/4	5/32	3/8 -24UNF-2A	9/32	1/8	.196 .200
3	1/4	1/4	1/8	1/2 -20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	1/2 -20UNF-2A	13/32	13/64	.261 .265
4	5/16	5/16	1/8	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64	9/16-18UNF-2A	13/32	13/64	.324 .328
5	3/8	3/8	1/4	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	5/8 -18UNF-2A	7/16	9/32	.386 .390
6	1/2	1/2	3/8	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	3/4 -16UNF-2A	7/16	27/64	.514 .518
7	5/8	5/8	1/2	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64	15/16-16UN-2A	15/32	1/2	.641 .645
8	3/4	3/4	3/4	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64	1 1/16-16UN-2A	15/32	21/32	.766 .770

INACTIVE FOR NEW DESIGN. USE FOR MAINTENANCE PURPOSES ONLY. FOR NEW DESIGN USE MS51821.

(E)

DASH NO.	K	N	O	P	Q	R	S
1	13/64	1/8	23/32	23/32	5/8	1 1/32	1 1/32
2	1/4	5/32	23/32	23/32	5/8	1 1/16	1 1/16
3	19/64	13/64	25/32	25/32	11/16	1 3/16	1 3/16
4	19/64	13/64	13/16	13/16	11/16	1 3/16	1 3/16
5	19/64	13/64	1	1	7/8	1 7/16	1 7/16
6	5/16	13/64	1 3/16	1 3/16	15/16	1 23/32	1 23/32
7	11/32	15/64	1 5/16	1 5/16	1 3/16	1 27/32	1 27/32
8	11/32	13/64	1 1/2	1 1/2	1 3/8	2 3/32	2 3/32

APPROVED 24 APRIL 1962 REVISED (A) 29 DEC 67 (B) 10 OCT 74 (C) 3 FEB 75 (D) 13 MAY 77 (E) 26 FEB 82

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

P.A. ARMY-AT Other Cust	TITLE TEES, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION TYPE, FEMALE PIPE SIDE	MILITARY STANDARD MS39208(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) *PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-A221

Source: https://assist.dla.mil -- Downloaded: 20261O-23T17:48Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

DASH NO.	TUBE O.D.		A PIPE THREAD NPTF	B	C THREAD LENGTH	D	E	F	G	H	J	K	L
9	7/8	7/8	3/4	1-3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	1-3/16-16UN-2A	15/32	23/32	.891 .895
10	1	1	1	1-5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1-5/16-16UN-2A	15/32	7/8	1.016 1.020
11	1-1/4	1-1/4	1-1/4	1-5/8-16UN-2A	35/64	1-3/32	1.270 1.274	13/32	13/64	1-5/8-16UN-2A	35/64	1-3/32	1.270 1.274
12	1-1/2	1-1/2	1-1/2	1-7/8-16UN-2A	9/16	1-11/32	1.520 1.524	15/32	13/64	1-7/8-16UN-2A	9/16	1-11/32	1.520 1.524

DASH NO.	M	N	O	P	Q	R	S	T
9	11/32	13/64	1-1/2	1-1/2	1-3/8	2-3/32	2-3/32	
10	13/32	13/64	1-5/8	1-5/8	1-5/8	2-7/32	2-7/32	
11	13/32	13/64	1-15/16	1-15/16	2	2-9/16	2-9/16	
12	15/32	13/64	2-3/8	2-3/8	2-1/8	3-1/16	3-1/16	

MATERIAL: STEEL, IN ACCORDANCE WITH FEDERAL STANDARD NO. 66, AISI-C-1112, C-1113, C-1117, C-1118 OR C-1137.

FINISH: CADMIUM PLATED, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DECIMALS ± .005, FRACTIONS ± 1/64, DEGREES ± 2^{0}.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH MIL-STD-H28/2 /8.

DIMENSIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

PART NUMBER: THE PART NUMBER CONSISTS OF MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS39208-1. THE PART NUMBER COVERS THE COMPLETE ITEM (WITH NUT AND SLEEVE).

NOTES: 1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

2. THIS ILLUSTRATION IS FOR IDENTIFICATION AND IS NOT INTENDED TO RESTRICT DESIGNS OR SHAPES NOT DIMENSIONED.

INACTIVE — SEE SHEET 1.

APPROVED 24 APRIL 1962 REVISED

P.A. Other Cost	TITLE: TEES, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION TYPE, FEMALE PIPE SIDE	MILITARY STANDARD MS39208(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 62 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T17:48Z
Check the source to verify that this is the current version before use.