MILITARY SPECIFICATION

HOSE AND FITTINGS, OIL AND TURBINE FUEL, SMOOTH BORE, CORRUGATED COVER, 7-INCH

This amendment forms a part of MIL-H-24565(SH), dated 3 March 1978, and is approved for use within the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

2.1, under "SPECIFICATIONS, MILITARY": Delete "MIL-C-24356".

PAGE 2

3.2, line 3: Delete "stitch" and substitute "pitch".

3.3: Delete and substitute:

"3.3 Length.

"3.3.1 Bulk hose. Bulk hose lengths shall be provided in 9 feet ± 1/2 inch lengths. Hose may be fabricated in longer lengths for purposes of obtaining samples for testing (see 4.3.2).

"3.3.2 Inspection length hose assembly. Inspection length of hose assembly shall be 8 feet, 11-3/8 inches ± 1/2 inch between surfaces 'S' and 'T' (see figure 2)."

3.4, line 2: Delete "0.063" and substitute "0.125".

3.5: After "7-inch", add "± .063".

3.7, last line: Delete "2, 3 and 4" and substitute "2 and 3".

3.8: Delete and substitute:

"3.8 Flexibility. When subjected to the flexibility test as specified in 4.6.10, bending and torquing the hose shall not reduce the minor diameter of the resulting ellipse to less than 5 inches. The wire helix shall not break or break through the tube or cover of the hose."

AMSC N/A FSC 4720
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-19T23:01Z
Check the source to verify that this is the current version before use.

3.9: Delete "500" and substitute "550".

PAGE 3

4.3.1: Delete and substitute:

"4.3.1 Sampling for examination, measurements and tests performed on entire hose. For the purpose of sampling, unless otherwise specified, the lot shall consist of all hose manufactured under the same conditions, and at the same time by the same manufacturer. A random sample of hose shall be selected from each lot in accordance with table II and subject to the examination and tests specified in 4.5 and 4.5.1 through 4.6.6."

PAGE 4

4.3.2, line 2: Delete "5" and add as last sentence; "A different section may be used for each type of test performed."

Add as new paragraph 4.3.2.2:

"4.3.2.2 Optional method of sampling for tensile properties tests. As an option to performing tensile property tests as specified in 4.6.9.1 through 4.6.9.3 from sections cut from hose (see 4.3.2), the tests may be performed on samples from ASTM laboratory prepared sheets in accordance with ASTM D 412, as approved by NAVSEA."

4.3.4: Delete and substitute:

"4.3.4 Sample for flexibility test. One hose assembly shall be selected from each lot, not less than 110 hoses or a combination of smaller lots totaling 110 hoses and subject to the flexibility test of 4.6.10."

Add as new paragraph 4.4.5:

"4.4.5 Rejection on the basis of flexibility test. The lot shall be rejected if the hose sample fails to meet the requirements for the flexibility test (see 3.8)."

PAGE 5

4.6.5, line 1: After "couplings", add "(see 3.7)".

4.6.7, line 2: Delete "MIL-C-24356" and substitute "3.7".

PAGE 7

4.6.10, line 1: Delete "an overhead" and substitute "a rigid".

PAGE 9

FIGURE 1: Delete in its entirety and substitute new Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:01Z
Check the source to verify that this is the current version before use.

PAGE 10

FIGURE 2: Delete in its entirety and substitute new Figure 2.

PAGE 11


FIGURE 3: Delete in its entirety and substitute new Figure 3.

PAGE 12

FIGURE 4: Delete in its entirety.

Preparing activity:
Navy - SH
(Project 4720-N874)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T23:01Z
Check the source to verify that this is the current version before use.

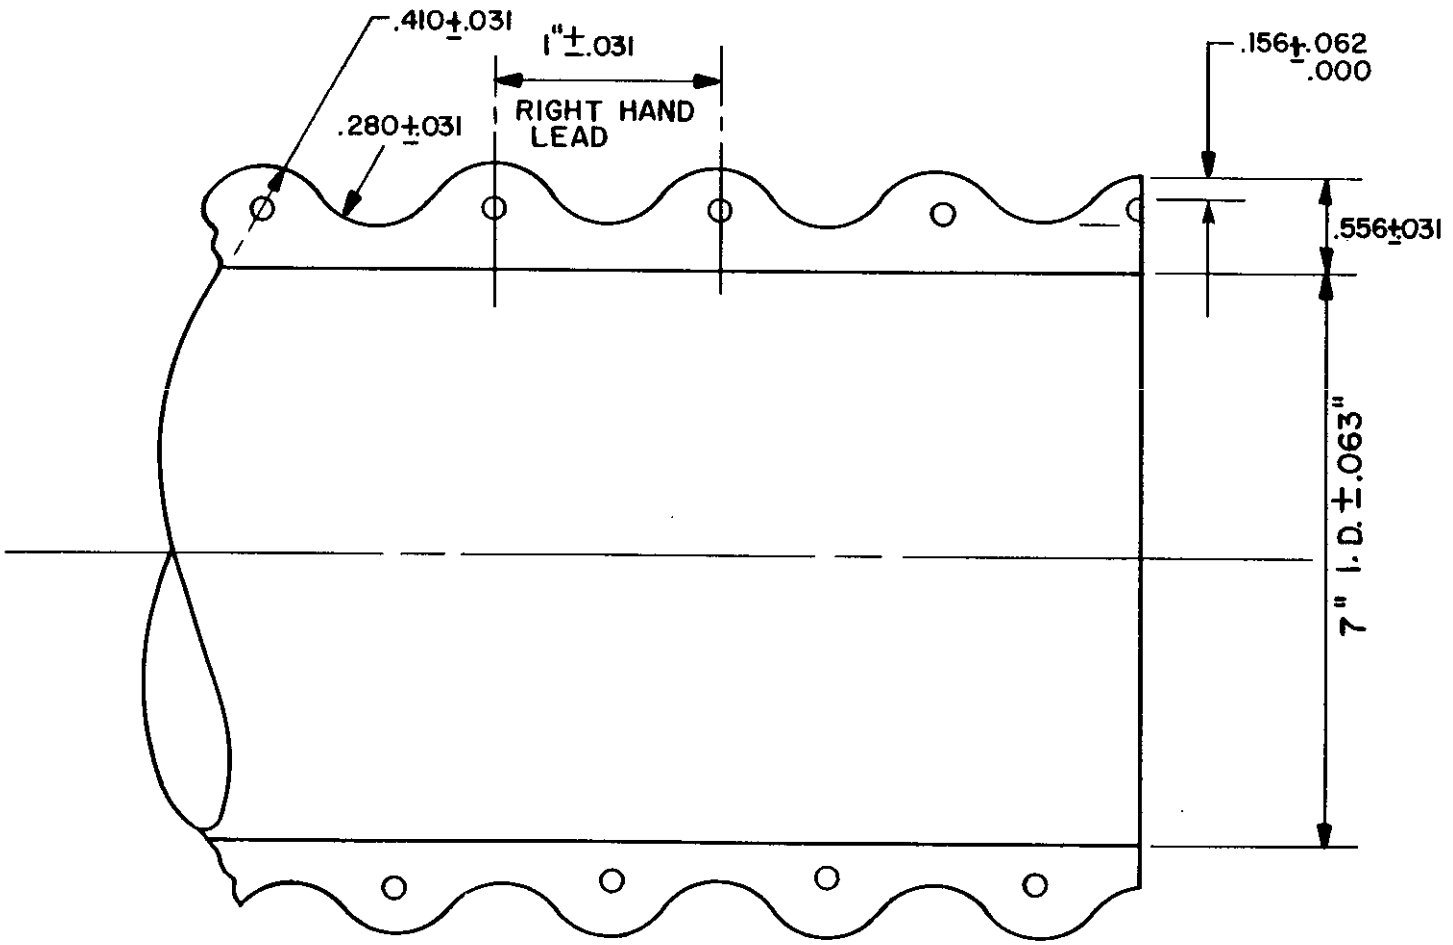



SH 11261

FIGURE 1. Convolution details of hose carcass.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:01Z
Check the source to verify that this is the current version before use.

NOTES:
1. ALL DIAMETERS MUST BE CONCENTRIC WITHIN .010" TIR.
2. TOLERANCES SHALL BE ±.005 ON DECIMAL DIM. ± 1/64 ON FRACTIONS WHERE NOT SPECIFIED.
3. DETAILS NOT SPECIFIED SHALL BE AS DESIGNATED BY THE CONTRACTOR AND AS APPROVED BY NAVSEA.
4. ALL GROOVE SURFACES TO BE 63 µin.

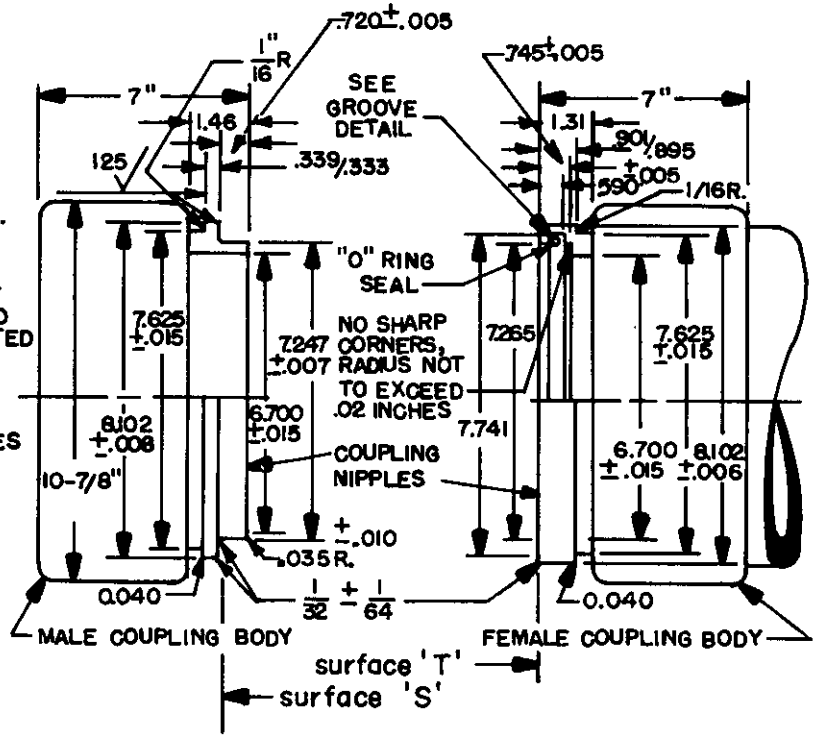

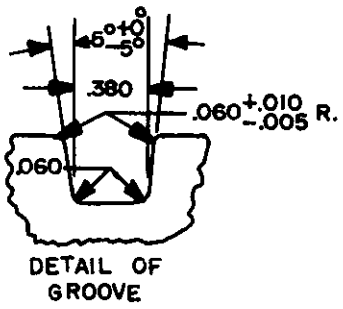


Maximum weight of the coupling assembly– 18 pounds.
Dimensions in inches.

SH 4910B

FIGURE 2. Reattachable coupling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:01Z
Check the source to verify that this is the current version before use.

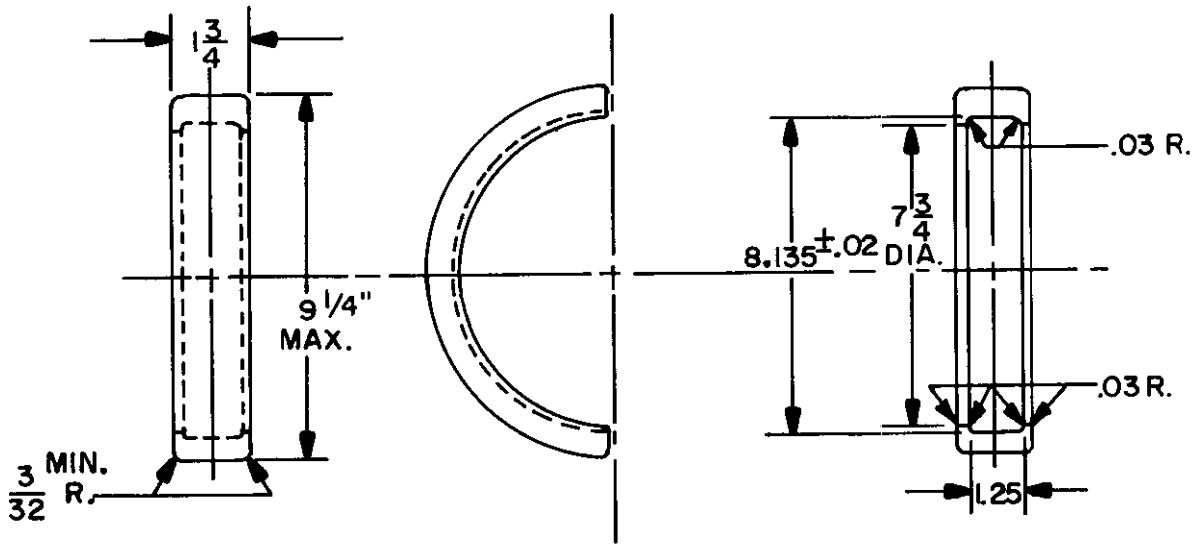

SH 13202903

FIGURE 3. Split clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:01Z
Check the source to verify that this is the current version before use.