DOD-M-24579(SH)
20 October 1978

METRIC

MILITARY SPECIFICATION

MEASURING SYSTEM, SUBMARINE STORAGE BATTERY CURRENT (METRIC)

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a current measuring system used to measure and display the instant value and time integral of direct current (d.c.) in a submarine storage battery circuit.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-14 - Molding Plastics and Molded Plastic Parts Thermosetting.
MIL-S-901 - Shock Tests, H.I. (High-Impact), Shipboard Machinery, Equipment and Systems, Requirements for.
MIL-C-915/49 - Cable, Electric Type 2SHU.
MIL-E-917 - Electric Power Equipment, Basic Requirements for (Naval Shipboard Use).
MIL-E-2036 - Enclosures for Electric and Electronic Equipment (Naval Shipboard).
MIL-P-15024 - Plates, Tags and Bands for Identification of Equipment.
MIL-P-15024/5 - Plates, Identification.
MIL-M-16034/2 - Ammeters, D.C. Switchboard, 4-1/2 Inch, 250- Degree Scale.
MIL-E-17555 - Electronic and Electrical Equipment, Accessories and Repair Parts, Packaging and Packing of.
MIL-I-45208 - Inspection System Requirements.

STANDARDS

MILITARY

MIL-STD-167-1 - Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited).
MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
MIL-STD-470 - Maintainability Program Requirements (For Systems and Equipments).
MIL-STD-1364 - Standard General Purpose Electronic Test Equipment.
MIL-STD-1399 - Interface Standard for Shipboard Systems.
Section 103 - Electric Power, Alternating Current.
Section 304 - Electrical Cables and Connectors.

PUBLICATIONS

NAVAL SEA SYSTEMS COMMAND

NAVSHIPS 0967-312-8010 - Maintainability Design Criteria Handbook for Designers (Formerly NAVSHIPS 94324) of Shipboard Electronic Equipment.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Ship Engineering Center, SEC 6124, Department of the Navy, Washington, DC 20362 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)
Standard Y32.16 - 1975 - Electrical and Electronic Parts and Equipment Reference Designation for.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Sample for first article inspection. When specified (see 6.1.1), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.2 System assemblies. The current measuring system shall consist of the following assemblies:

(a) D.c. transducer. The transducer shall contain one or more iron cores, wound coils and Hall effect semiconductor devices as required to yield operation specified herein. The transducer shall provide electrical isolation between the storage battery d.c. busbar (rigid busbars or cables) and all circuits in the transducer. The function of the transducer is to sense magnitude and direction of d.c. flowing in the busbar and to send appropriate signals to the control unit.

(b) Control unit. The control unit shall utilize solid state nonrotating parts such as transistors, other semiconductor devices, transformers, resistors, capacitors, and the like as required to perform the required function. The function of the control unit is to process the signal derived from the transducer and to appropriately energize the display devices specified hereinafter.

(1) Ammeters. The measuring system shall be capable of operating within the requirements of this specification with three ammeters which will be remotely located on a switchboard. Unless otherwise specified (see 6.1.1), the ammeters are not required to be furnished as a part of the measuring system. The ammeters shall be as follows:

a. Low-range. The low-range current ammeter will be a d.c. ammeter of 20-0-20 A range conforming to MIL-M-16034/2.

b. Mid-range. The mid-range d.c. ammeter will be a d.c. ammeter conforming to MIL-M-16034/2 in the following ranges:

500-0-500 A range.
800-0-800 A range.

c. High-range. The high-range d.c. ammeter will be a d.c. ammeter conforming to MIL-M-16034/2, except the ranges shall be as follows:

4000-0-3000 A range.
8000-0-6000 A range.

(2) Ampere-hour indicator. The ampere-hour indicator shall have two digital counters, one mounted in the control unit and the other remotely mounted near the ammeters on a switchboard. The digital counter mounted in the control unit shall have a range of 0 to 9,999,999 A hours, and the remote digital counter shall have a range of 0 to 999,999 (see 3.4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

3.3 Connecting cable. The connections between the d.c. transducer, the control unit, and all d.c. meters and the ampere-hour indicators will be made by shielded cables having a maximum resistance of 2.3 ohms per conductor per 100 m at 25°C (type 2SWU of MIL-C-915/49). Unless otherwise specified (see 6.1.1), cables shall not be furnished. Maximum cable lengths will be as follows:

(a) Between the d.c. transducer and the control unit - 80 m.
(b) Between the control unit and all d.c. meters and the remote ampere-hour indicator:

500-500 A mid range and 4000-0-3000 A high range: 80 m.
800-800 A mid range and 8000-0-6000 A high range: 160 m.

3.3.1 Electrical connectors. Electrical connectors shall conform to Section 304 of MIL-STD-1399.

3.4 Construction of assemblies.

3.4.1 Transducer. The transducer shall conform to the requirements of MIL-E-917 and shall be designed for bulkhead mounting. The envelope and mounting dimensions shall be as shown on figure 1. The transducer shall have a dripproof protected (45-degree) enclosure conforming to class 1 of MIL-E-2036. The transducer shall be installed by sliding the transducer over the end of the busbar. If the transducer contains one or more Hall effect semiconductor devices, replacement of these devices shall not require removal of the transducer from the busbar. The mass of the transducer shall not exceed 12 kilograms (kg).

3.4.2 Control unit. The control unit shall conform to the requirement of MIL-E-917 and shall be designed for bulkhead mounting. Mounting and envelope dimensions shall be as shown on figure 2. The control unit shall have a dripproof protected (45-degree) enclosure conforming to class I of MIL-E-2036. The mass of the control unit shall not exceed 14 kg.

3.4.3 Ampere-hour indicator. The ampere-hour indicator shall be a nonmercury type having two digital counters. Each counter shall display seven digits for the local readout and six digits for the remote. Each counter shall be operated from the control unit to indicate the time integral of the battery d.c. in one direction only; one counter to register the charging current ampere hours and the other to register the discharging current ampere-hours. The counter digits shall be not smaller than 3.5 millimeter (mm) high and 3 mm wide and shall be white on a black background. The indicators shall be flush mounting type. The bezel of the indicators shall be constructed of metal or plastic material. The metal shall be of corrosion-resistant material or material treated for corrosion resistance in accordance with MIL-E-917. The plastic material shall be in accordance with MIL-M-14 of a type specified in MIL-E-917. The dimensions of the indicators and mounting bezel shall be as shown on figure 3. A hand operable reset device shall be provided for each digital counter. The reset devices shall be mounted on the back for the counter mounted in the control unit and in the front for the counter remotely mounted. One counter shall have a legend plate designated "charge" and the other counter shall have a legend plate designated "discharge".

3.5 System connections and isolation. Positive indication or marking shall be provided on the transducer to identify the direction of charge current flow. The system assemblies shall be provided with terminal blocks or connectors for external connections. The system shall be completely isolated, both electrically and physically, from the battery busbars. Minimum values of insulation resistance and dielectric withstanding voltage shall be as shown in table I. There shall be no evidence of arcing, corona (visible, audible, or odorous) flashover or punctured insulation following the dielectric withstanding voltage test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

TABLE I. Insulation resistance and dielectric withstanding voltage.

Assembly	Point of measurement		Minimum insulation resistance	Minimum dielectric withstanding voltage (alternating current)
	Between	And	(Megohms)	(Volts)
Transducer	Busbar	Transducer terminals	10	3600
	Each electrically isolated circuit	All other circuits and ground	10	1200
Indicator	Terminals	Ground	20	2600
	Terminals	Exposed metallic surfaces	20	2600
Control unit	Each electrically isolated circuit	All other circuits and ground	10	1200

3.6 System performance.

3.6.1 Accuracy. Accuracy of indication shall be as specified in table II, in terms of percent of the full scale value of the ammeter(s) being energized for the d.c. indicators and in terms of percent of maximum busbar current for the low-range, mid-range, or high-range, times the time interval in hours for the ampere-hour indicator. For example, if the full scale value of the ammeter is 40 A (20-0-20 m), the low-range current accuracy is plus or minus 1 percent of 40 (2 x 20 A) or plus or minus 0.4 A for any current not greater than 20 A. A similar example for ampere-hours involving 2 hours operation in the low current range where the accuracy is plus or minus 1.5 percent, is (plus or minus 1.5 percent of 40 (2 hrs. x 20 A)) or plus or minus 0.6 ampere-hour. These accuracies shall apply at reference conditions as specified in 3.6.1.1.

TABLE II. Accuracies in percentage.

Indicator	Busbar current A, chg. or dischg.	
	1 to 20	20 to 8000
Low-range current ammeter	±1.0	----
Mid-range current ammeter	----	±2
High-range current ammeter	----	±2
Ampere-hour indicator	±1.5	±2.5

3.6.1.1 Reference conditions. Accuracy requirements as shown in table II shall apply under the reference conditions shown in table III.

TABLE III. Reference conditions.

Variable	Condition
Temperature	27.5°C ± 2°C
Relative humidity	30 to 60 percent
Applied frequency	60 ± 1 Hz
Applied voltage	115 ± 1 volts
Operating position	On vertical panel
Warm-up time	Reading time

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

3.6.2 Input power (control unit). Circuits of the control unit will be connected to and shall be capable of operating from a 60 Hertz (Hz), single phase source of 115 volts (V) type I power in accordance with Section 103 of MIL-STD-1399. The indications given by the meters and the indicators shall not be affected to an extent greater than that specified in 3.9 by the steady state variations in input voltage and frequency of the magnitudes given by Section 103 of MIL-STD-1399. System calibration shall not be permanently affected by voltage excursions from 103.5 V to 126.5 V. The power required from the 60 Hz source to operate the system shall be not more than 100 watts (W) under all operating conditions specified herein.

3.6.3 Busbar current. When busbar current exceeding the end-scale value of the ammeters (see 3.2(b)(1)) flows, the control unit circuits shall provide limiting of the energy applied to these ammeters such that while the pointer is held at or beyond the end-scale point the indicator is not mechanically or thermally stressed at levels above those which can be withstood continuously. The system shall be capable of continuous operation at 8000 A busbar current. Fault currents up to 20,000 A for 1 second shall cause no damage to any assemblies, subassemblies and parts of the system. No damage shall result from rates of change of busbar current up to 2,000,000 A per second.

3.6.4 Busbar voltage. The nominal busbar to ground d.c. voltage is 270 V with a range of 175 V to 355 V with one battery of 126 cells or 128 cells.

3.6.5 Calibration. Means shall be provided for the calibration of the measuring system and shall be located within the control unit. Length of the cables between the control unit, the transducer, the ammeters, and indicator may vary from installation to installation (see 3.3). The adjustment device(s) setting(s) shall be secure from change due to shock, vibration, and other environmental conditions specified herein (see 3.7).

3.7 Environmental requirements.

3.7.1 Mechanical.

(a) Shock. System assemblies, subassemblies, and parts shall meet the requirements for type A, grade A, hull (bulkhead) mounted, lightweight, class 1 equipment as specified in MIL-S-901. Change in indication of the meters and the indicator (following reset of the meter pointers to zero) shall not exceed the value specified in 3.9. Following the shock test of 4.7.2.4, the system shall show no signs of breakage or distortion of parts sufficient to impair operation. Insulation resistance shall be not lower than the values of table I and dielectric withstanding voltage shall be not lower than 65 percent of the values of table I.

(b) Vibration. System parts shall withstand the type I vibration requirements of MIL-STD-167-1 without change in indication of the meters and the indicator (following reset of the meter pointers to zero) exceeding the value specified in 3.9. Following the vibration test of 4.7.2.5 the system shall show no signs of breakage or distortion of parts sufficient to impair operation. Insulation resistance shall be not lower than the values of table I.

3.7.2 Temperature range. The system shall be capable of operating in the temperature range of 5°C to 65°C. Reference temperature of initial calibration shall be 27.5°C ± 2°C for the meters, indicator, control unit and the transducer. Change in indication due to ambient temperature excursions of 37.5°C above or 22.5°C below the reference temperature shall not exceed the values specified in 3.9.

3.7.3 Relative humidity. The transducer ampere-hour indicator and control unit shall be capable of storage for 168 hours at 100 percent relative humidity. Following such storage insulation resistance shall not be less than 2 megohms and the transducer ampere-hour indicator and control unit shall show no signs of material damage or corrosion.

3.8 Inclination. The system shall not exceed the errors specified in 3.9 when inclined to an angle of 60 degrees from the vertical in any direction.

3.9 Errors due to environmental conditions. In addition to the errors permitted by table II, additional errors as shown in table IV are permitted under or following exposure to specified environmental conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

TABLE IV. Errors in percentage of full scale meter value due to environmental conditions.

Condition	Busbar current, amperes
	1 to 8000
Temperature range (3.7.2)	
Ammeters	±1
Ampere-hour indicator	±1/
Input power (3.6.2)	
Ammeters	1/
Ampere-hour indicator	±1/
Vibration (3.7.1(b))	
Ammeters (following zero reset)	±2
Ampere-hour indicator	±1/
Shock (3.7.1(a))	
Ammeters (following zero reset)	±5
Ampere-hour indicator	±1/
Inclination (3.8)	
Ammeters	±2
Ampere-hour indicator	No effect

1/ Included in table II values (see 3.6.1).

2/ Count change not greater than minus 0 plus 10 ampere-hours.

3.10 Recovered materials. Unless otherwise specified herein, all equipment, material, and articles incorporated in the products covered by this specification shall be new and shall be fabricated using materials produced from recovered materials to the maximum extent practicable without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products is allowed under this specification, unless otherwise specifically specified.

3.11 Technical data. The contractor shall prepare technical data in accordance with the data ordering documents included in the contract (see 6.1.2).

3.11.1 Drawings. In addition to the drawing requirements covered by the data ordering document (see 6.1.2) the unique technical features specified in 3.11.1.1 shall be included.

3.11.1.1 Drawings and certification data. Drawings shall not be smaller than 430 mm by 560 mm nor larger than 710 mm by 1020 mm. The size drawing scale shall be such that the number of sheets required shall be the minimum consistent with contents and clarity. Drawings shall contain the following minimum data:

(a) Manufacturer's name and model number.
(b) Reference to this specification.
(c) List of parts, tabulating part identification, specification data of part, find number corresponding to part flags of outline drawings.
(d) Core and insulation system, including varnish impregnation of magnetic parts.
(e) Identification and stress level data (part manufacturer's and in-use ratings) of each electrical part.
(f) Schematic diagrams.
(g) Shock classification and approval reference.
(h) Outline drawing of each assembly including:
    (1) Overall and mounting dimensions.
    (2) Location and size of mounting holes.
    (3) Mass of each assembly.
    (4) Panel cutout data for the indicator.
    (5) Position, size and marking of terminals used for power input and system part interconnection.
    (6) Disassembly and reassembly sketches (for example an exploded view) required for transducer installation on a busbar.
    (7) Clearance requirements for ventilation, part removal and test equipment access.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

(i) Interconnection cable requirements such as permissible resistance, and shielding requirements, and so forth.
(j) Amperes, and power required from the 115 V, 60 Hz source.
(k) Graphic or tabular presentation of characteristics of transducer, control unit circuits, meters, and indicator. This data is required for troubleshooting assistance and need not contain complete calibration procedures and instructions. Normal readings at relevant circuit points under specified condition shall be presented.
(l) List of recommended test equipment such as multimeters or portable standard instruments.
(m) Schematic circuit of the complete system.
(n) Connection diagram showing approximate part location, cable routing within equipment and terminal and wire marking.
(o) Description of operation, describing briefly how the circuit parts perform their functions to yield specified systems operation.

3.12 Maintainability. The equipment shall be designed so that it can be maintained by easy replacement of removable parts or modules. The design shall conform to the design-for-maintainability requirements of MIL-STD-470 and Publication NAVSHIPS 0967-312-8010. The equipment repair time (ERT) shall be 1 hour.

3.12.1 Test equipment. The system shall be so designed as to be capable of being maintained, alined, calibrated, and repaired with the aid of the following test equipment selected from MIL-STD-1364.

(a) Clamp-on V ammeter, 0 to 600 A and 0 to 600 V, a.c.
(b) Multimeter, 0 to 400 V, d.c., 0 to 800 V, a.c. 0 to 16 ampere d.c. and 0 to 200 megohm range.
(c) Oscilloscope.
(d) D.c. milliammeter (ma), 0 to 150 ma range.
(e) A.c. voltmeter, 0 to 600 V, range.

3.12.1.1 A contractor desiring to utilize test equipment other than the ranges specified herein shall submit the list to Naval Ship Engineering Center (NAVSEC) for approval with justification of the necessity for using such test equipment prior to the start of manufacture of the system.

3.12.2 Repair of removable parts and subasserblies. The repairability of any removable modules, parts or subassemblies shall be determined in accordance with MIL-E-917. The time required to repair any malfunctioned parts, module or subassembly, after removed from the system, shall be not more than 10 minutes.

3.13 Reliability. The current measuring system shall have a mean-time-between-failure (MTBF) of not less than 10,000 hours. Definition of failure shall be increase of errors of indication beyond the limits shown in tables II and III or failure to indicate.

3.14 Repair parts. Repair parts shall be processed in accordance with the data ordering documents specified (see 6.1.2).

3.15 Identification of equipment division by reference designation. To provide identification that will aid documentation and to facilitate maintenance, each part, subassembly or assembly of the current measuring system shall be identified by reference designations in accordance with ANSI Y32.16-1975.

3.16 Identification plate. The current measuring system shall be equipped with an identification plate in accordance with MIL-P-15024. The identification plates shall conform to normal marking requirements of MIL-P-15024/5.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

4.2 Inspection system. The contractor shall provide and maintain an inspection system acceptable to the Government for supplies and services covered by this specification. The inspection system shall be in accordance with MIL-I-45208 (see 6.1.2).

4.3 First article inspection. First article inspection shall consist of the examination and tests specified in table V.

TABLE V. Inspections.

Inspection	First article inspection	Quality conformance inspection	Requirement paragraph	Inspection paragraph
General examination	X	X	3.4	4.7.1
Initial accuracy	X	X	3.6.1	4.7.2.1
Input power variation	X	X	3.6.2	4.7.2.2
Sustained high current and short circuit	X		3.6.3	4.7.2.3
Shock	X		3.7.1(a)	4.7.2.4
Vibration	X		3.7.1(b)	4.7.2.5
Inclination	X		3.8	4.7.2.7
Temperature cycling	X		3.7.3	4.7.2.6
Insulation resistance	X	X	Table I	4.7.3
Humidity	X		3.7.3	4.7.3.2
Dielectric withstanding voltage	X	X	Table I	4.7.4
Temperature rise (control unit only)	X		3.6.2	4.7.5
Calibration	X	X	3.6.5	4.7.6
Maintainability demonstration	X		3.12	4.8
Enclosure	X		3.4.1 and 3.4.2	4.9

4.4 Quality conformance inspection. Each current measuring system offered for delivery shall be subjected to the quality conformance inspection as specified in table V.

4.5 Test conditions. Unless otherwise specified in the applicable test paragraph, all tests shall be conducted under the reference conditions as specified in 3.6.1.1. With the exception of temperature cycling test (see 4.7.2.6) the tests may be conducted at ambient temperature of 25°C ± 2°C and corrections to 27.5°C ± 2°C (reference conditions) shall be made to all readings and measurements. The specific ambient temperature at the time of test shall be measured and recorded. Necessary adjustment and calibration of the system shall be made prior to starting of the tests; no adjustments or calibration shall be allowed during or between the tests.

4.6 Test plan and test report.

4.6.1 Test plan. A test plan shall be prepared and (when specified (see 6.1.2)) shall be submitted to NAVSEC for approval at least 30 days prior to beginning of the tests for the first article and quality conformance inspection. The test plan shall include but not be limited to detailed test procedures of all tests specified herein, list of test equipment; list of instrumentation, environmental conditions, required data, and other pertinent information as required by each test.

4.6.2 Test report. A test report shall be prepared and when specified (see 6.1.2) shall be submitted to NAVSEC for approval. The test report shall address each test specified herein and shall include but not be limited to the following items:

(a) Test article identification or full description of units or equipments tested.
(b) Data and geographical location of test or evaluation.
(c) Statement of test/evaluation objectives, including type, unit of measure, and quantitative goals and requirements to be demonstrated.
(d) Discussion of methods and conditions of test, including methods of evaluating the data obtained and comparision of the conditions with those anticipated in ultimate deployment and use of contract item.
(e) Results obtained, including specific identification and discussion of objectives demonstrated satisfactorily and identification of problems encountered and their solutions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

(f) Failure analysis and corrective action. Total operating time prior to occurrence of failure.
(g) Principal environmental stress conditions, operating modes, operating time, and cycling conditions.
(h) Contractor's conclusions and recommendations based on evaluation of test results.

4.7 Inspection procedure.

4.7.1 Visual examination. Units and assemblies of the current measuring system shall be visually examined to determine that:

(a) Parts used are as identified by drawings and fabrication techniques.
(b) Materials and fabrication techniques used in construction of parts such as the transducer, transformers, reactors and other fabricated wound magnetic parts are as identified by drawings. This examination shall include but may not be limited to verification of use of:
    (1) Correct grade and dimensions of core iron.
    (2) Correct core (or ground), winding, layer and outer wrapper insulation material.
    (3) Correct gauge, insulation and lead termination of magnet wire.
    (4) Correct choice of an application of insulation varnish or other impregnant.
    (5) Correct marking of leads. (Marking on parts is consistent with schematic and connection diagrams.)
(c) Mounting of parts is as shown on drawings. This includes examination for correct location, orientation, securing method (fasteners, insulators, and others) and, where applicable torquing.
(d) Marking of parts (or, where parts are too small to mark, marking of adjacent panel) and terminals is complete and consistent with schematic and connection diagrams.
(e) Hookup wire is as shown on drawings.
(f) Hookup wire is neatly formed into groups and laced, tied or clamped securely into place (with nonflammable cord or clamps) to prevent chafing due to vibration.
(g) Wire ends are marked.
(h) Grommets are provided where wires pass through holes in metal panels.
(i) Wires are not bent sharply around corners.
(j) Wires are connected by solder or other mechanical means (with locking devices) connections.
(k) Clearances called for on drawings (see 3.11.1.1(h)(7)) for part removal (parts need not actually be removed) or access of tools or test equipment probes or leads are adequate.
(l) Indicator mounting panel drilling plan and mounting means as specified.
(m) Soldering joints are properly done.

4.7.2 Accuracy determination.

4.7.2.1 Initial. The current measuring system shall be operated at reference conditions as specified in 3.6.1.1 and readings made at busbar current (or equivalent ampere-turns) and ampere-hour values of table VI.

TABLE VI. Initial accuracy.

Charge busbar current (amperes)	Discharge busbar current (amperes)	Ampere-hours (minimum)
1 ±5 1/	1 ±5 1/	3 ±2.5 1/
±50 1/	±50 1/	±5 1/
250	250	125
500 ±1/	500 ±1/	250
800	800	250
1000	1000	±50 1/
2500	2500	250
5000 ±1/	5000 ±1/	100 ±1/
6000 ±1/	8000 ±1/	100 ±1/

1/ Units after first article tested to these values only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

4.7.2.2 Input power variations. Input voltage and frequency shall be adjusted to the following values to check the system accuracy at 5, 500, and 800 charge amperes and 500 and 800 discharge amperes busbar current (use table VI for the minimum ampere-hours required for each value of current):

(a) 103.5 V at 63 Hz.
(b) 103.5 V at 57 Hz.
(c) 126.5 V at 63 Hz.
(d) 126.5 V at 57 Hz.

4.7.2.2.1 If data shows that errors are equal to or less than 2/3 of the sum of the applicable values from tables II and IV, no additional values of busbar current need be checked. Otherwise, each value of table VI shall be checked. Voltage shall also be adjusted to 103.5 V at 60 Hz, then 126.5 V at 60 Hz for 15 minutes each, then indication at 50 amperes of busbar current checked.

4.7.2.3 Sustained high current fault current. The accuracy test of 4.7.2.2 shall be made after the system has been operated at currents (of equivalent ampere-turn) for the periods as follows:

(a) 8000 amperes for 10 minutes.
(b) 20,000 amperes for 1 second.

4.7.2.4 Shock. The transducer, control unit and ampere-hour indicator shall be mounted on a fixture fabricated to simulate actual installation circumstances. Design of the fixture shall assume the transducer to be wholly supported by the normal mounting means and not be furnished any support by the busbar. The ampere-hour indicator shall be mounted on a portion of the fixture similar to fixture 6D-1 of figure 7-1 of MIL-S-901. The fixture, with the system parts shall be mounted on a lightweight shock test machine and tested as specified in MIL-S-901. Tests shall be performed with approximately 50 amperes of busbar current flowing.

4.7.2.4.1 Definition of failure of shock test. Following the shock test of 4.7.2.4, failures shall be defined as follows:

(a) Failure to indicate or errors of indication exceeding the values of table IV as determined by the accuracy checks of 4.7.2.2.
(b) Breakage or distortion of any parts sufficient to impair operation.
(c) Insulation resistance lower than the values of table I.
(d) Dielectric withstanding voltage lower than 65 percent of the specified values of table I.

4.7.2.5 Vibration. Using the fixture as specified in 4.7.2.4, the system assemblies and subassemblies shall be subjected to a type I test of MIL-STD-167-1. Failure of this test shall be determined by the same criteria as in 4.7.2.4.1, except that dielectric withstanding voltage need not be determined.

4.7.2.6 Temperature cycling. A current measuring system shall be subjected to temperature cycling over the range of temperatures of 3.7.2 as follows: the test shall be performed to check the system accuracy as per 4.7.2.2:

(a) Determine accuracy at reference conditions.
(b) Condition the system at minimum temperature (5°C) for 8 hours.
(c) Determine accuracy at the minimum temperature (5°C).
(d) Condition the system at reference temperature 27.5°C ± 2°C for 8 hours.
(e) Repeat (b), (c), and (d) twice for a total of three cycles to minimum temperature and return to reference temperature.
(f) Condition the system at maximum temperature (65°C) for 8 hours.
(g) Determine accuracy at maximum temperature (65°C).
(h) Condition the system at reference temperature 27.5°C ± 2°C for 8 hours.
(i) Repeat (f), (g), and (h) twice for a total of three cycles to maximum temperature and return to reference temperature.
(j) Maximum change in indication between observations at minimum and maximum temperatures shall be considered to be the effect of temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

4.7.2.7 Inclination. Using the fixture as specified in 4.7.2.4, the system shall be inclined forward, backward, to the right, and to the left to an angle of 60 degrees from the vertical to test compliance with accuracy requirement in table IV. The accuracy shall be checked at busbar current and ampere-hours reading as follows:

Charge busbar current (Amperes)	Discharge busbar current (Amperes)	Ampere-hours (Minimum)
50	50	5

4.7.3 Insulation resistance. Insulation resistance test shall be conducted in accordance with Method 302 of MIL-STD-202. Test conditions shall be as follows:

(a) Test potential: 500 volts ± 10 percent d.c.
(b) Points of measurement: As specified in table I.
(c) Electrification time - 60 seconds minimum.

4.7.3.1 Electrically isolated circuits shall be determined by application of the following criteria:

(a) Circuits whose only connection to each other is by electromagnetic coupling through a magnetic core which is shared in common by the circuits, shall be considered to be electrically isolated from each other.
(b) Circuits where only connection to each other is through a capacitor shall not be considered to be electrically isolated from each other. When the purpose is to test circuits internal to the current measuring system and only then, such circuits shall be temporarily interconnected with a jumper wire, or test lead, during the test.

4.7.3.2 Humidity. A transducer ampere-hour indicator and a control unit shall be stored for 168 hours at 100 percent relative humidity at 31°C ± 2°C. Upon completion of this period, the transducer ampere-hour indicator and control unit shall be tested as specified in 4.7.3 for compliance with 3.7.3. The test shall be performed within 5 minutes after completion of the humidity period. Following the test, the transducer ampere-hour indicator and control unit shall be carefully examined for any signs of material damage and corrosion.

4.7.4 Dielectric withstanding voltage. Dielectric withstanding voltage shall be conducted in accordance with Method 301 of MIL-STD-202. Test conditions shall be as follows:

(a) Magnitude of test voltages shall be as specified in table I.
(b) Nature of test voltage. The test voltage shall approximate a true sine wave of a frequency not less than the rated frequency of the circuit under test.
(c) Points of measurement. Points of measurement shall be as specified in table I. (Electrically isolated circuits shall be as defined in 4.7.3.1.)
(d) Duration of test. Duration shall be 60 seconds, minimum. The test voltage shall be removed by adjustment of its value to zero, not by sudden interruption.
(e) Definition of failure. Any evidence of arcing, corona (visible or odorous), flashover or punctured insulation shall be interpreted as failure of the test.
(f) Dielectric withstanding voltage test shall be conducted after all other tests have been completed.

4.7.5 Temperature rise (control unit only). The control unit shall be operated with meters and indicator or simulated impedances connected and also with a real or simulated transducer connected. The transducer (or simulator) energy shall be varied to determine the value (within limits corresponding to busbar currents from 0 to 8000 amperes) resulting in maximum power dissipation in the control unit circuits. The ambient temperatures shall be maintained at 65°C. Measurement of temperatures of circuit parts shall be performed as specified in MIL-E-917. The power consumed by the control unit shall be determined to comply with 3.6.2.

4.7.6 Calibration demonstration. Resistance shall be inserted between the control unit and the transducer and between the control unit and the meters and the indicator to simulate various cable lengths. The resistance shall be adjusted to 0.2, 0.5, zero, 1 and 3.5 ohms per conductor and compliance with 3.6.5 shall be demonstrated.

4.8 Maintainability demonstration test. The times required to accomplish normal corrective maintenance and preventive maintenance tasks shall be demonstrated. The elapsed time and manhours required to replace each of the onboard repair parts shall be reported. The elapsed time and manhours to perform each proposed preventive maintenance task shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

also be reported. These time recordings may be obtained where possible from the maintenance actions associated with other tests required by this specification in order to minimize the amount of special effort required to obtain the maintainability data. The time data shall include the fault correction time for corrective maintenance tasks and servicing time for preventive maintenance exclusive of any subsequent test time. A maintainability demonstration report shall be submitted which contains the data recorded, analysis of the data, and the results of any retests if applicable. The procedure for the maintainability demonstration shall be the same as the procedures that will be in the equipment technical manual.

4.9 Enclosures. The enclosures shall be tested to determine conformance with 3.4.1 and 3.4.2.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government acquisitions. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.3.)

5.1 Preservation-packaging, packing and marking. Preservation-packaging shall be level A or C, packing level A, B, or C and marking in accordance with MIL-E-17555 for equipments and stock repair parts. Onboard repair parts shall be preserved-packaged level A, packed level C, and marked in accordance with MIL-E-17555.

6. NOTES

6.1 Ordering data.

6.1.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) If sample for first article inspection is required (see 3.1).
(c) If ammeters should be furnished (see 3.2(b)(1)).
(d) When cable is required (see 3.3).
(e) Level of shipment required (see 5.1).

6.1.2 Data requirements. When this specification is used in a contract which invokes the provision of the "Requirements for Data" of the Defense Acquisition Regulation (DAR), the data identified below, which are required to be developed by the contractor, as specified on an approved Data Item Description (DD Form 1664) and which are required to be delivered to the Government, should be selected and specified on the approved Contract Data Requirement List (DD Form 1423) and incorporated in the contract. When the provisions of the "Requirements for Data" of the DAR are not invoked in a contract, the data required to be developed by the contractor and required to be delivered to the Government should be selected from the list below and specified in the contract.

Paragraph	Data requirements	Applicable DID	Option
3.11.1	Technical manual	DI-M-2044	Type II of MIL-M-15071
3.11.1.1	Drawings, Engineering and Associated Lists, Level 3 Production	DI-E-7031	
3.14	Provisioning Parts List Index	DI-V-2022	
3.14	Provisioning Parts List (PPL)	DI-V-7002	
3.14	Short Form Provisioning Parts Lists	DI-V-7003	
4.2	Inspection system	UDI-R-4803	
4.6.1	Test plan	UDI-T-23732	
4.6.2	Test report	DI-T-2072	

(Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

6.1.2.1 The data requirements of 6.1.2 and any task in section 3, 4, or 5 of this specification required to be preformed to meet a data requirement may be waived by the contracting/acquisition activity upon certification by the offeror that identical data were submitted by the offeror and accepted by the Government under a previous contract for identical item procured to this specification. This does not apply to specific data which may be required for each contract regardless of whether an identical item has been supplied previously (for example, test reports).

6.2 Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection as to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.3 Subcontracted material and parts. The preparation for delivery requirements of referenced documents listed in section 2 do not apply when material and parts are acquired by the contractor for incorporation into the equipment and lose their separate identity when the system is shipped.

Preparing activity:
Navy - SH
(Project 6625-N724)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

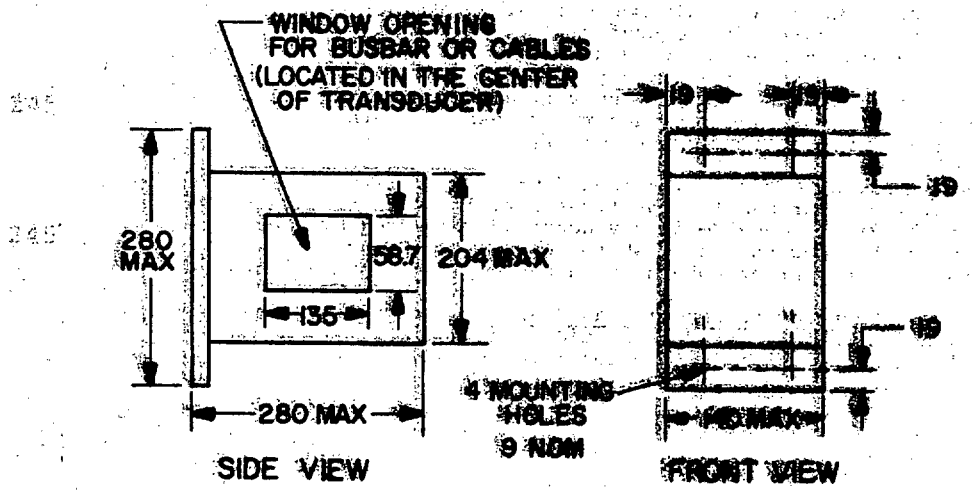


FIGURE 1. Dimension of bulkhead mounted transducer.

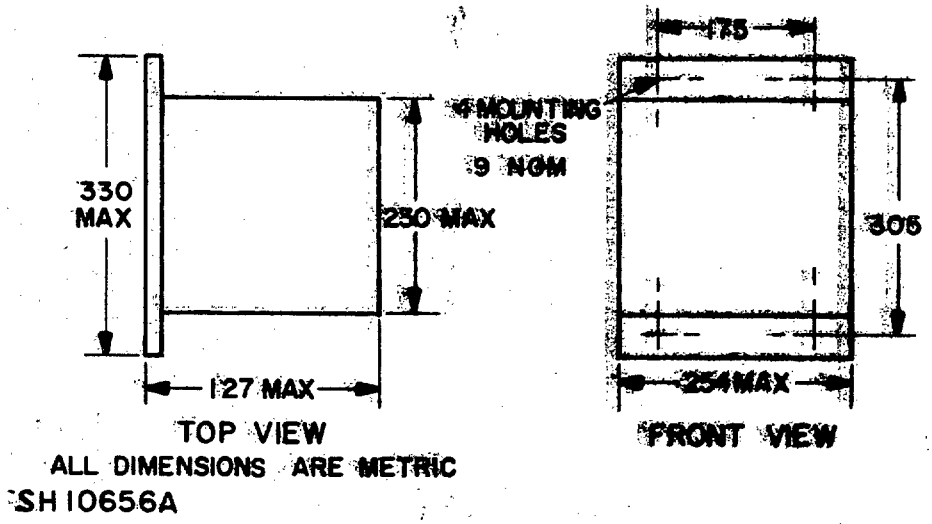


FIGURE 2. Dimensions of control unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

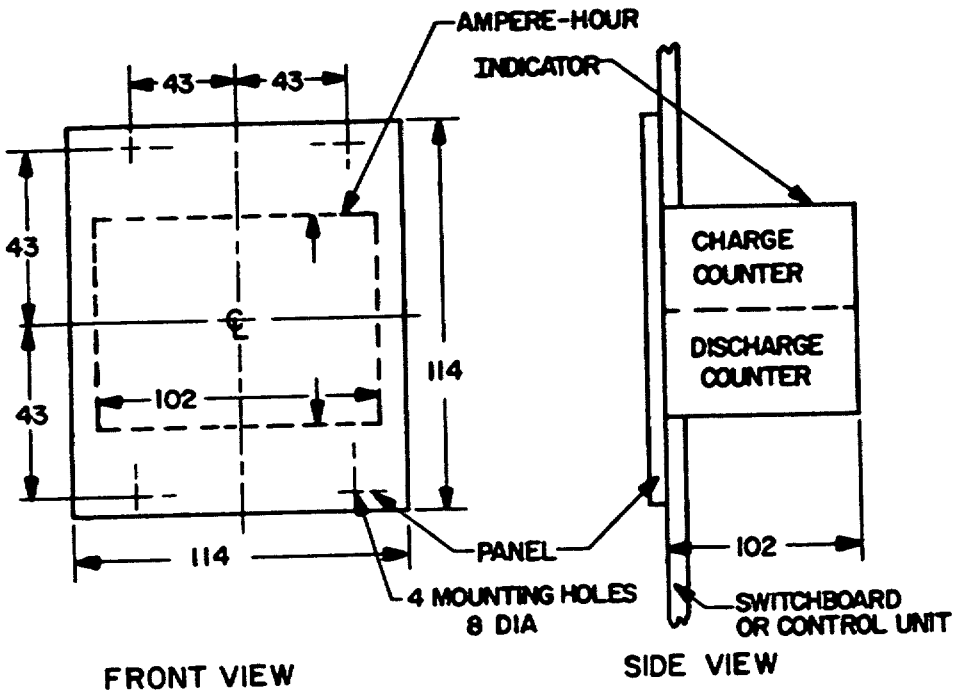


FIGURE 3. Dimensions of ampere-hour indicator. (Remote indicator shall be mounted in a KX241 meter enclosure).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: DoD-M-24579

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.

FOLD

COMMANDER
NAVAL SHIP ENGINEERING CENTER (SEC 6124)
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID

DEPARTMENT OF THE NAVY

DOD 316

U.S.MAIL

COMMANDER
NAVAL SHIP ENGINEERING CENTER (SEC 6124)
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20362

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T23:06Z
Check the source to verify that this is the current version before use.