
This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP. CLASS 5310

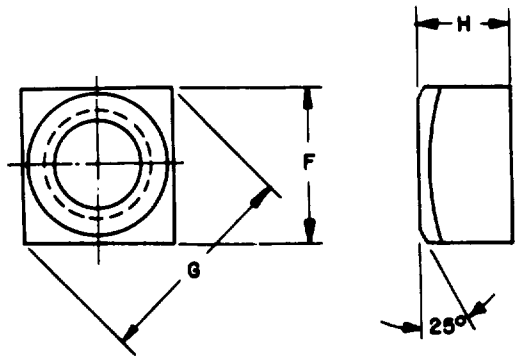

MS part No.	Nominal size	Width across flats, F		Width across corners, G		Thickness, H		FIIN
		Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	
	Inches	Inches	Inches	Inches	Inches	Inches	Inches	
MS16211-1	1/4	0.4375	0.425	0.619	0.584	0.235	0.203	
MS16211-2	5/16	.5625	.547	.795	.751	.283	.249	
MS16211-3	3/8	.6250	.606	.884	.832	.346	.310	
MS16211-4	7/16	.7500	.728	1.061	1.000	.394	.356	
MS16211-5	1/2	.8125	.788	1.149	1.082	.458	.418	
MS16211-6	5/8	1.0000	.969	1.414	1.330	.569	.525	
MS16211-7	3/4	1.1250	1.088	1.591	1.494	.680	.632	
MS16211-8	7/8	1.3125	1.269	1.856	1.742	.792	.740	
MS16211-9	1	1.5000	1.450	2.121	1.991	.903	.847	
MS16211-10	1-1/8	1.6875	1.631	2.386	2.239	1.030	.970	
MS16211-11	1-1/4	1.8750	1.812	2.652	2.489	1.126	1.062	
MS16211-12	1-3/8	2.0625	1.994	2.917	2.738	1.237	1.169	
MS16211-13	1-1/2	2.2500	2.175	3.182	2.986	1.348	1.276	

(A) Material: Material shall be of copper silicon alloy in accordance with copper alloy 651 of QQ-C-591.

Threads: Threads shall be UNC-2B in accordance with Handbook H28.

Dimensions: All dimensions are in inches unless otherwise specified.

Notes:

1. In case of conflict with any document referenced herein, this standard shall govern.
2. Referenced documents shall be the issue in effect on date of invitation for bids.

(Project 5310-N029Sh)

APPROVED 8 MAY 1957 REVISED (A) 19 AUGUST 1966

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS 16211 (SHIPS)
Ships	A - N - AF -	NUTS, PLAIN, SQUARE, REGULAR, UNFINISHED, COPPER-SILICON ALLOY, UNC-2B, NONMAGNETIC	
Procurement Specification (A) FF-N-836			SHEET 1 OF 1

DD FORM 672
1 OCT 52

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/7674

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.