This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army - MU
Navy - EC
Air Force - 11, 15, 80
DSA - ES

User activities: Army
Navy
Air Force

P.A. AF-85

Other Cust Army EL

Navy - AS

International interest

Procurement Specification
MIL-C-38999, 27599 (USAF)

SUPERSEDES:

TITLE
INSERT ARRANGEMENT, ELECTRIC CONNECTOR, SHELL SIZE 25


MILITARY STANDARD
MS20057

PAGE 1 OF 1

DD FORM 1 SEP 63 672 (Reordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-T120

Ⓗ DENOTES CHANGE

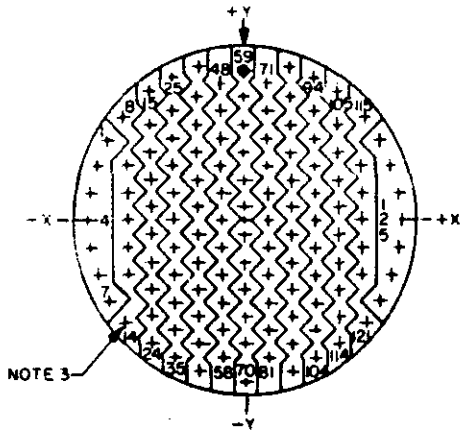

SERVICE RATING M

CANCELED AFTER 15 MAY 75
USE MIL-STD-1560 (J)

Contact hole location

Contact number	Location X axis	Location Y axis	Contact number	Location X axis	Location Y axis	Contact number	Location X axis	Location Y axis
1	-.479	.279	46	-.166	.427	91	.166	.332
2	-.520	.190	47	-.166	.522	92		.427
3	-.546	.095	48	-.083	.475	93		.522
4	-.555	.000	49		.380	94	.249	.496
5	-.546	-.095	50		.285	95		.380
6	-.520	-.190	51		.190	96		.285
7	-.479	-.279	52		.095	97		.190
8	-.424	-.357	53		.000	98		.095
9	-.415	-.190	54		-.095	99		.000
10		-.095	55		-.190	100		-.095
11		.000	56		-.285	101		-.190
12		-.095	57		-.380	102		-.285
13		-.190	58		-.475	103		-.380
14	-.424	-.357	59	.000	.522	104		-.475
15	-.332	-.444	60		.427	105	.332	-.444
16		-.332	61		.332	106		-.332
17		-.237	62		.237	107		-.237
18		-.142	63		.142	108		-.142
19		-.047	64		+.047	109		-.047
20		-.047	65		-.047	110		-.047
21		-.142	66		-.142	111		-.142
22		-.237	67		-.237	112		-.237
23		-.332	68		-.332	113		-.332
24		-.427	69		-.427	114		-.427
25	-.249	-.496	70		-.555	115	.424	-.357
26		-.380	71	.083	-.475	116	.415	-.190
27		-.285	72		-.380	117		-.095
28		-.190	73		-.285	118		.000
29		-.095	74		+.190	119		-.095
30		.000	75		+.095	120		-.190
31		-.095	76		.000	121	.424	-.357
32		-.190	77		-.095	122	.479	-.279
33		-.285	78		-.190	123	.520	-.190
34		-.380	79		-.285	124	.546	-.095
35		-.475	80		-.380	125	.555	.000
36	-.160	-.531	81		-.475	126	.546	-.095
37	-.166	-.427	82	-.160	-.531	127	.520	-.190
38		-.332	83	-.166	-.427	128	.479	-.279
39		-.237	84		-.332			
40		-.142	85		-.237			
41		-.047	86		-.142			
42		-.047	87		-.047			
43		-.142	88		-.047			
44		-.237	89		-.142			
45		-.332	90		-.237			

ARR. No.	Contacts No. 22M			Receptacles Style	Flange mtg	Box mtg	Jam-nut mtg	Solder mtg	Plugs Style	Straight
-1	128			Pin Sock	MS20026-25-1P MS20026-25-1S		MS20029-25-1P MS20029-25-1S		Pin Sock	MS20028-25-1P MS20028-25-1S

FED. SUP CLASS 5935

APPROVED 22 JAN 66 REVISED (F) 22 MAR 71 (G) 24 MAR 72 (H) 14 NOV 72 (J) 15 MAY 75

Source: https://assist.dla.mil -- Downloaded: 20240-23T14:21Z
Check the source to verify that this is the current version before use.