FED. SUP CLASS
5935

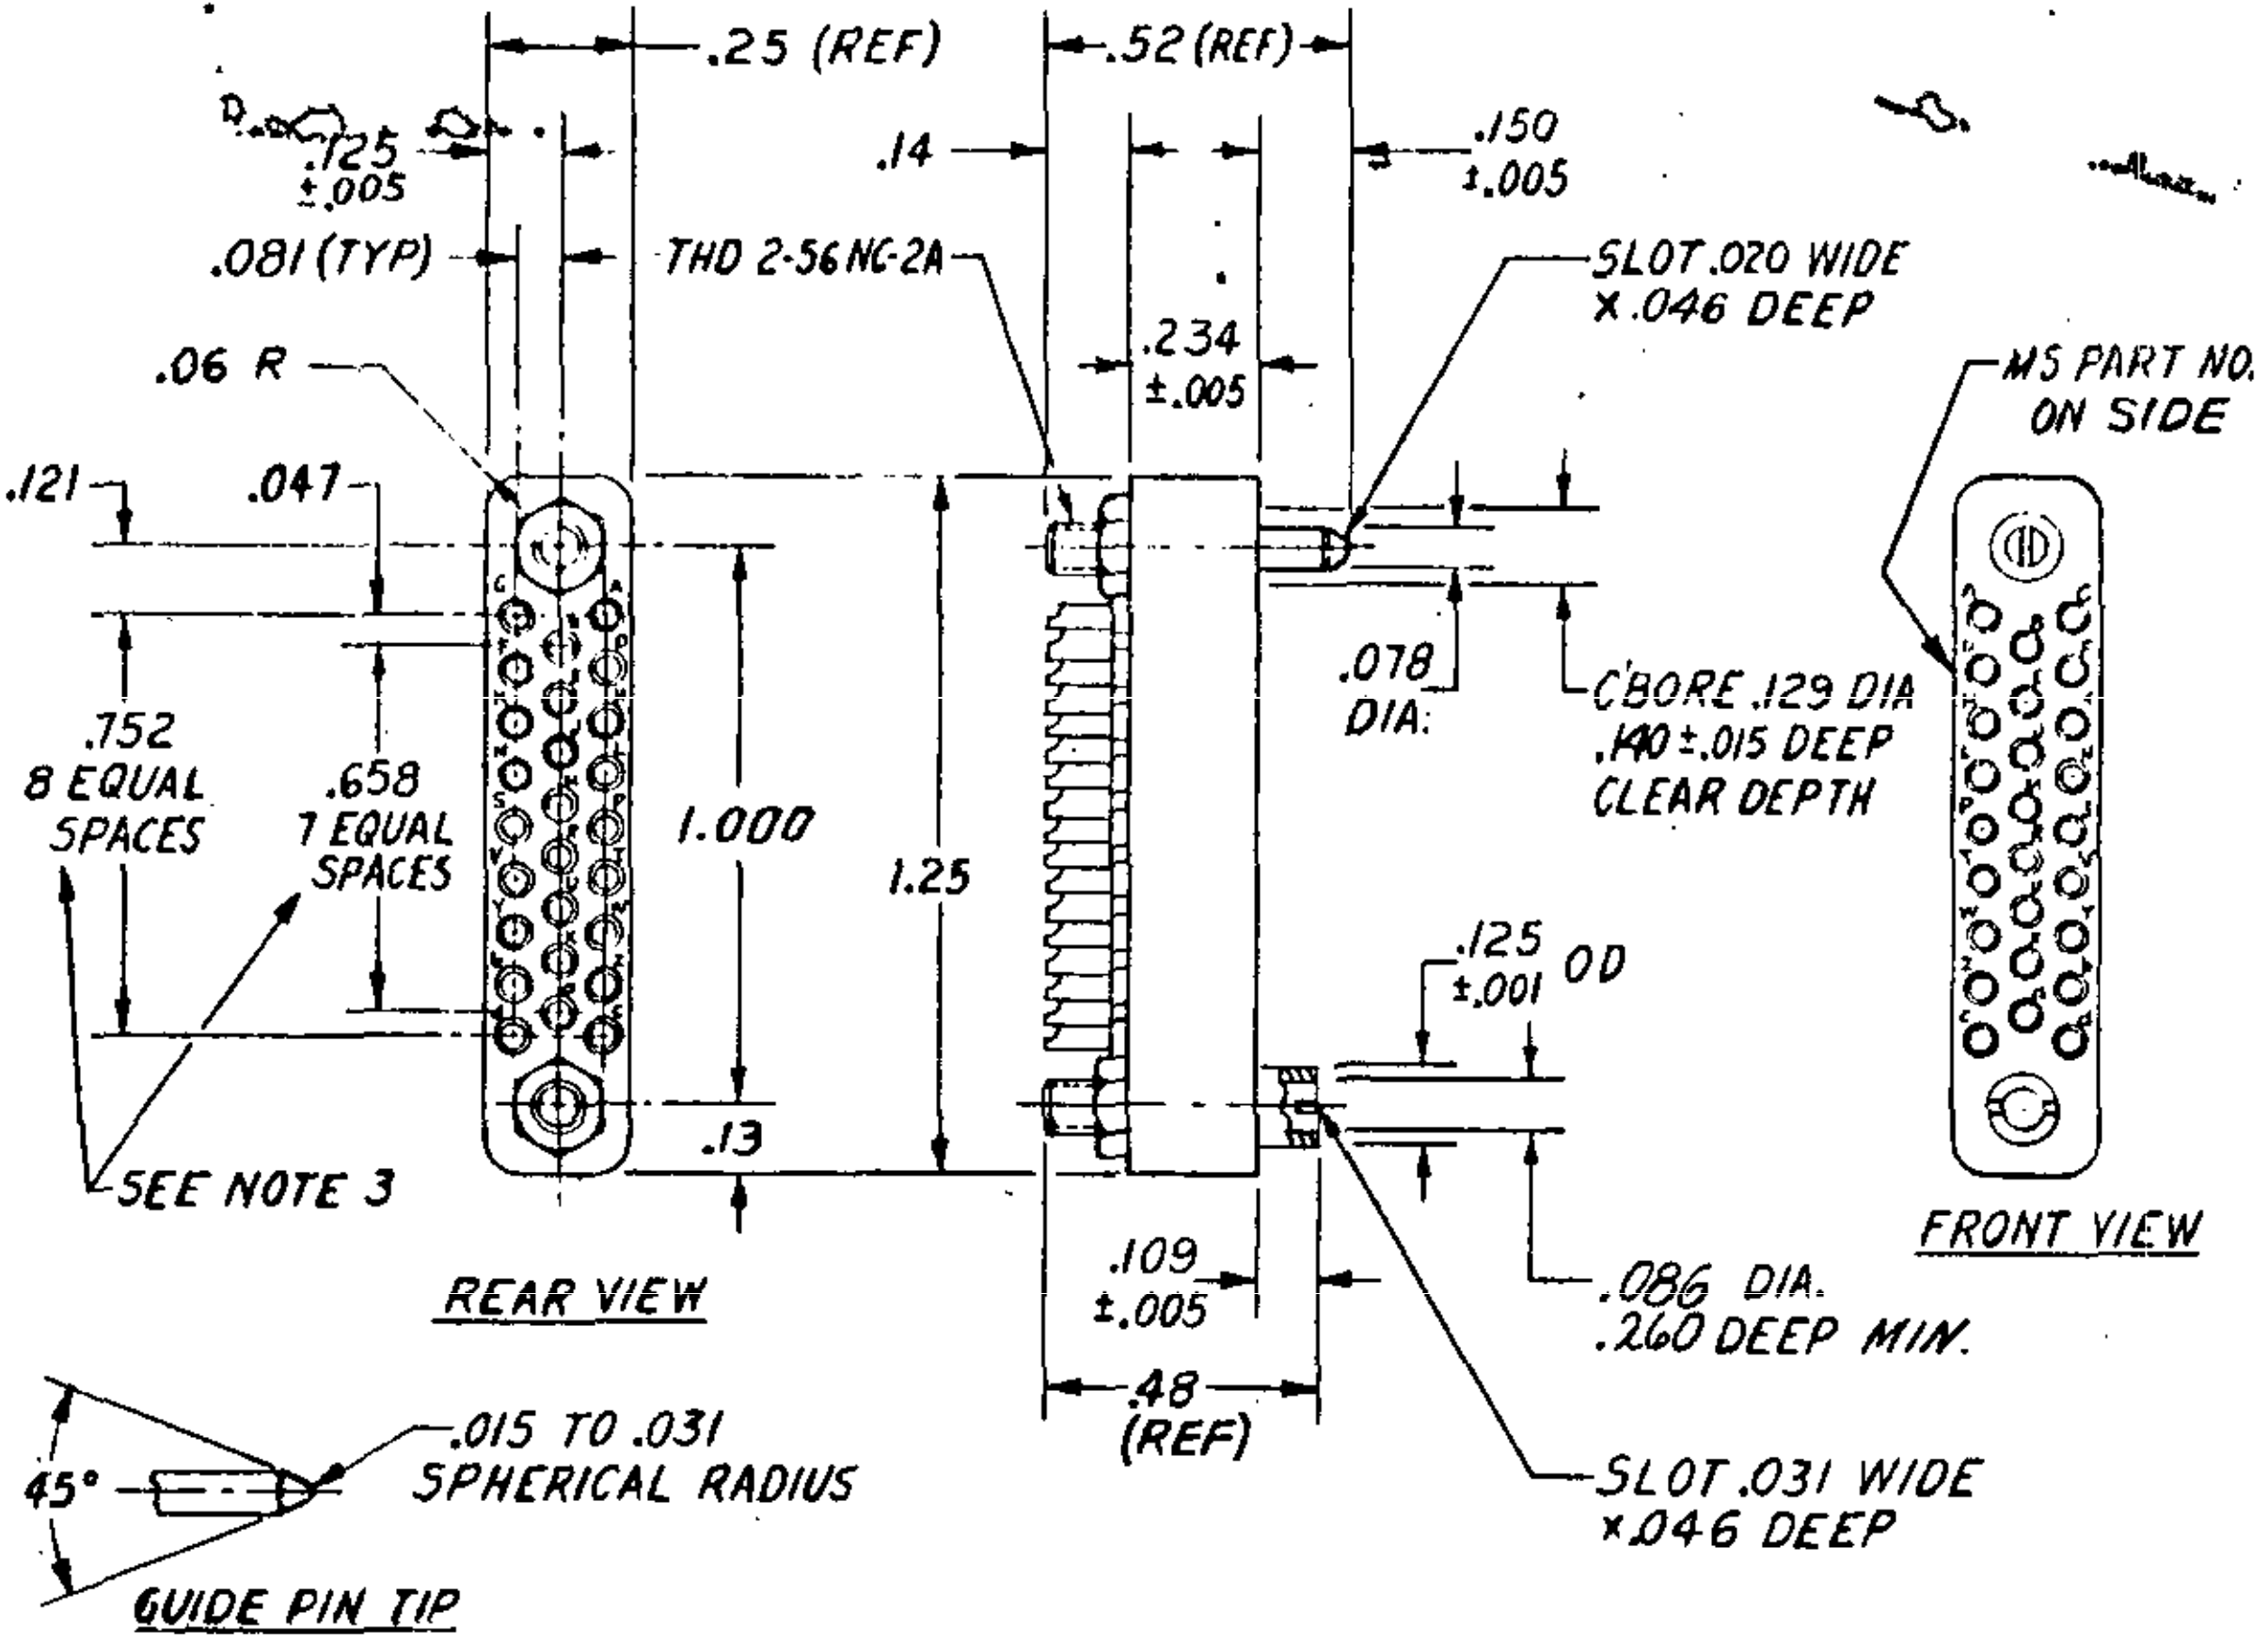

MS PART NUMBER	VOLTAGE RATING AT 60 CPS		TEMPERATURE RATING
	AT SEA LEVEL VOLTS	AT 70,000 FT. VOLTS	°C
MS24049-1	Not approved for use		125
MS24049-2	350	90	150
MS24049-3	350	90	200

NOTES:

1. MATING CONNECTOR IS MS24050.
2. FORCE REQUIRED TO INSERT OR WITHDRAW MATING CONNECTOR IS 12 LBS. MAX.
3. MAXIMUM TOLERANCE BETWEEN ANY TWO MOLDED CONTACT CENTERS IS ±.002.
4. APPLICABLE TOP CABLE OPENING IS MS24130-3.
5. ALL DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.01, OR ±.002, AS APPLICABLE, ON DECIMALS AND ±1/2° ON ANGLES.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS.
7. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
8. AT THE OPTION OF THE MANUFACTURER, A LAND, BOSS, OR PAD OF 0.010 INCH MAXIMUM MAY BE ADDED TO THE MATING FACE OF THE MOLDING FOR PROTECTION OF RAISED LETTERS WHERE USED.

Ⓕ CANCELLED AFTER 15 OCT 1975 USE M28748/8-E00G1A

APPROVED 12 AUG 1954 REVISED Ⓐ 4 JUNE 1956 Ⓑ 20 MAR 1957 Ⓒ 5 DEC 1957 Ⓓ 20 JUNE 1963 Ⓔ 3 APR 1964 Ⓕ 15 OCT 1975

Reviewer user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS, FSC listing.
AF 11 II 17 II 80,11 ARMY MU II EL II NAVY AS II SH 3 MC 3

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design application and for repetitive use shall be made from this document.

P.A. AF - 85 Other Cust ARMY - EL NAVY - EC	TITLE CONNECTOR, PLUG-RECEPTACLE, ELECTRICAL, RECTANGULAR, 26 CONTACTS, FEMALE, 3 AMPS.	MILITARY STANDARD MS24049
PROCUREMENT SPECIFICATION MIL-C-8384	SUPERSEDES: MS24049 USAF	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:47Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. GPO 810-516