
PROJECT NO. 5935-1944

FED. SUP CLASS
5935

USER SYMBOLS:
NAVY - MC
ARMY - MI

REVIEWER SYMBOLS:
ARMY - EL, ME
NAVY -
AIR FORCE - 11, 80

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

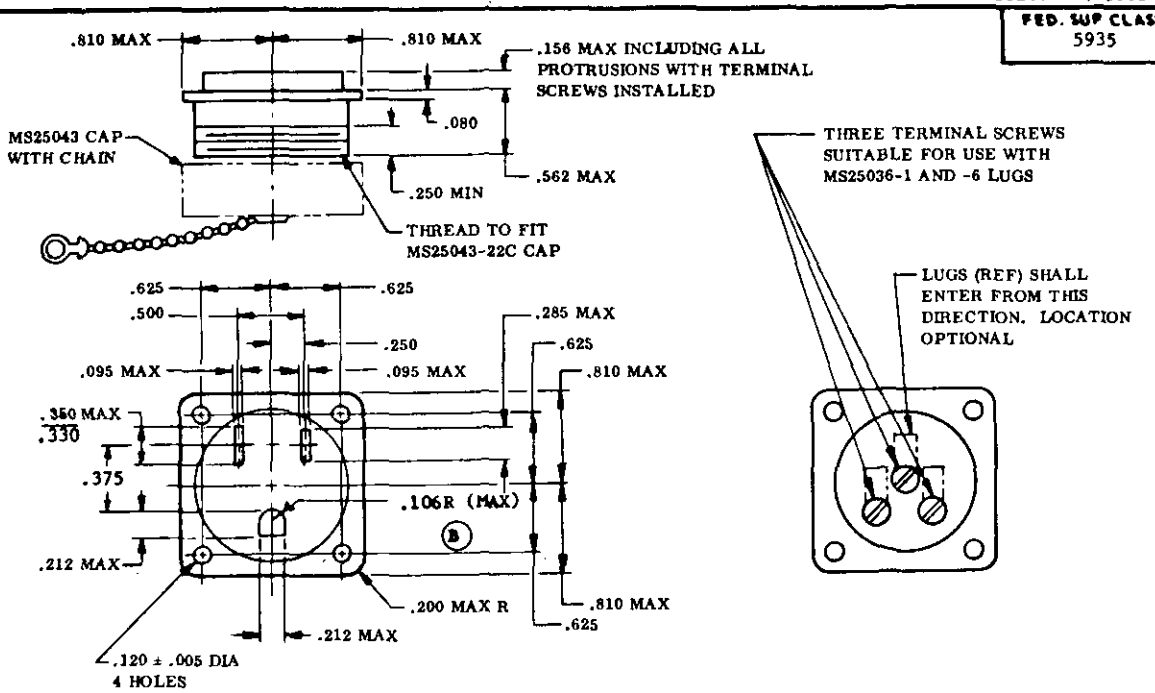

DASH NO.	ITEM	SUPERSEDES
-1	RECEPTACLE, INCLUDING MS25043-22C CAP	NAF 1307-1
-2	RECEPTACLE WITHOUT CAP	NAF 1307-2

NOTES:

1. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: ±.015. DIMENSIONS & TOLERANCING IN ACCORDANCE WITH USASI Y 14.5 - 1966 (ANSI)
2. WHERE ONLY MAXIMUM DIMENSIONS ARE SHOWN, THE RECEPTACLE NEED NOT HAVE THE SHAPE SHOWN, BUT SHALL BE CONTAINED WITHIN THE OUTLINE SHOWN.

REQUIREMENTS:

1. EACH RECEPTACLE SHALL BE USABLE WITH ANY PLUG WHICH CONFORMS TO MIL-C-3767/13
2. AS THE PLUG IS INSERTED INTO THE RECEPTACLE, THE GROUNDING PIN OF THE PLUG SHALL ESTABLISH CONTACT AT LEAST .125 BEFORE CONTACT IS MADE BY EITHER OF THE POWER PINS. INSERTION FORCE SHALL NOT EXCEED 25 POUNDS. WITHDRAWAL FORCE SHALL BE 15 ± 10 POUNDS.
3. THE MOUNTING FLANGE OF EACH RECEPTACLE SHALL BE MADE OF METAL, AND THE GROUNDING SOCKET SHALL BE CONNECTED TO IT WITHIN THE RECEPTACLE.
4. THE RECEPTACLE SHALL HAVE A CONTINUOUS MINIMUM CURRENT RATING OF 15 AMPERES AT 120 VOLTS 60 HERZ.
5. WHEN THE PLUG IS INSERTED IN THE RECEPTACLE, THE POTENTIAL DROP, IN MILLIVOLTS, BETWEEN THE RESPECTIVE TERMINALS OF THE CONNECTORS SHALL NOT EXCEED 50 MILLIVOLTS WHEN CARRYING A CURRENT OF 15 AMPERES WHEN TESTED IN ACCORDANCE WITH MIL-C-5015.
6. THE TERMINALS AND HEADS OF THE TERMINAL SCREWS SHALL BE COLORED AS FOLLOWS: WIDE POWER TERMINAL - WHITE: NARROW POWER TERMINAL - YELLOW; GROUND TERMINAL - GREEN.

MS25199 IS INACTIVE FOR DESIGN FOR USE ON NAVY EQUIPMENT. USE MIL-C-3767/16 OR MIL-C-3767/17

© CANCELLED AFTER 20 May 1983
USE W-C-596

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 14 MAY 1964 REVISED (A) 5 JAN 1965 (B) 20 FEB 75 (C) May 1983

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - EL AIR FORCE - 85	TITLE: CONNECTOR, RECEPTACLE, FEMALE, ELECTRIC POWER, UTILITY - 120 VOLTS, 60 HERZ.	MILITARY STANDARD MS25199
PROCUREMENT SPECIFICATION MIL-C-3767	SUPERSEDES: NAF 1307	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE M . 23085

☆ U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/288

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T19:05Z
Check the source to verify that this is the current version before use.