FED. SUP CLASS
5930

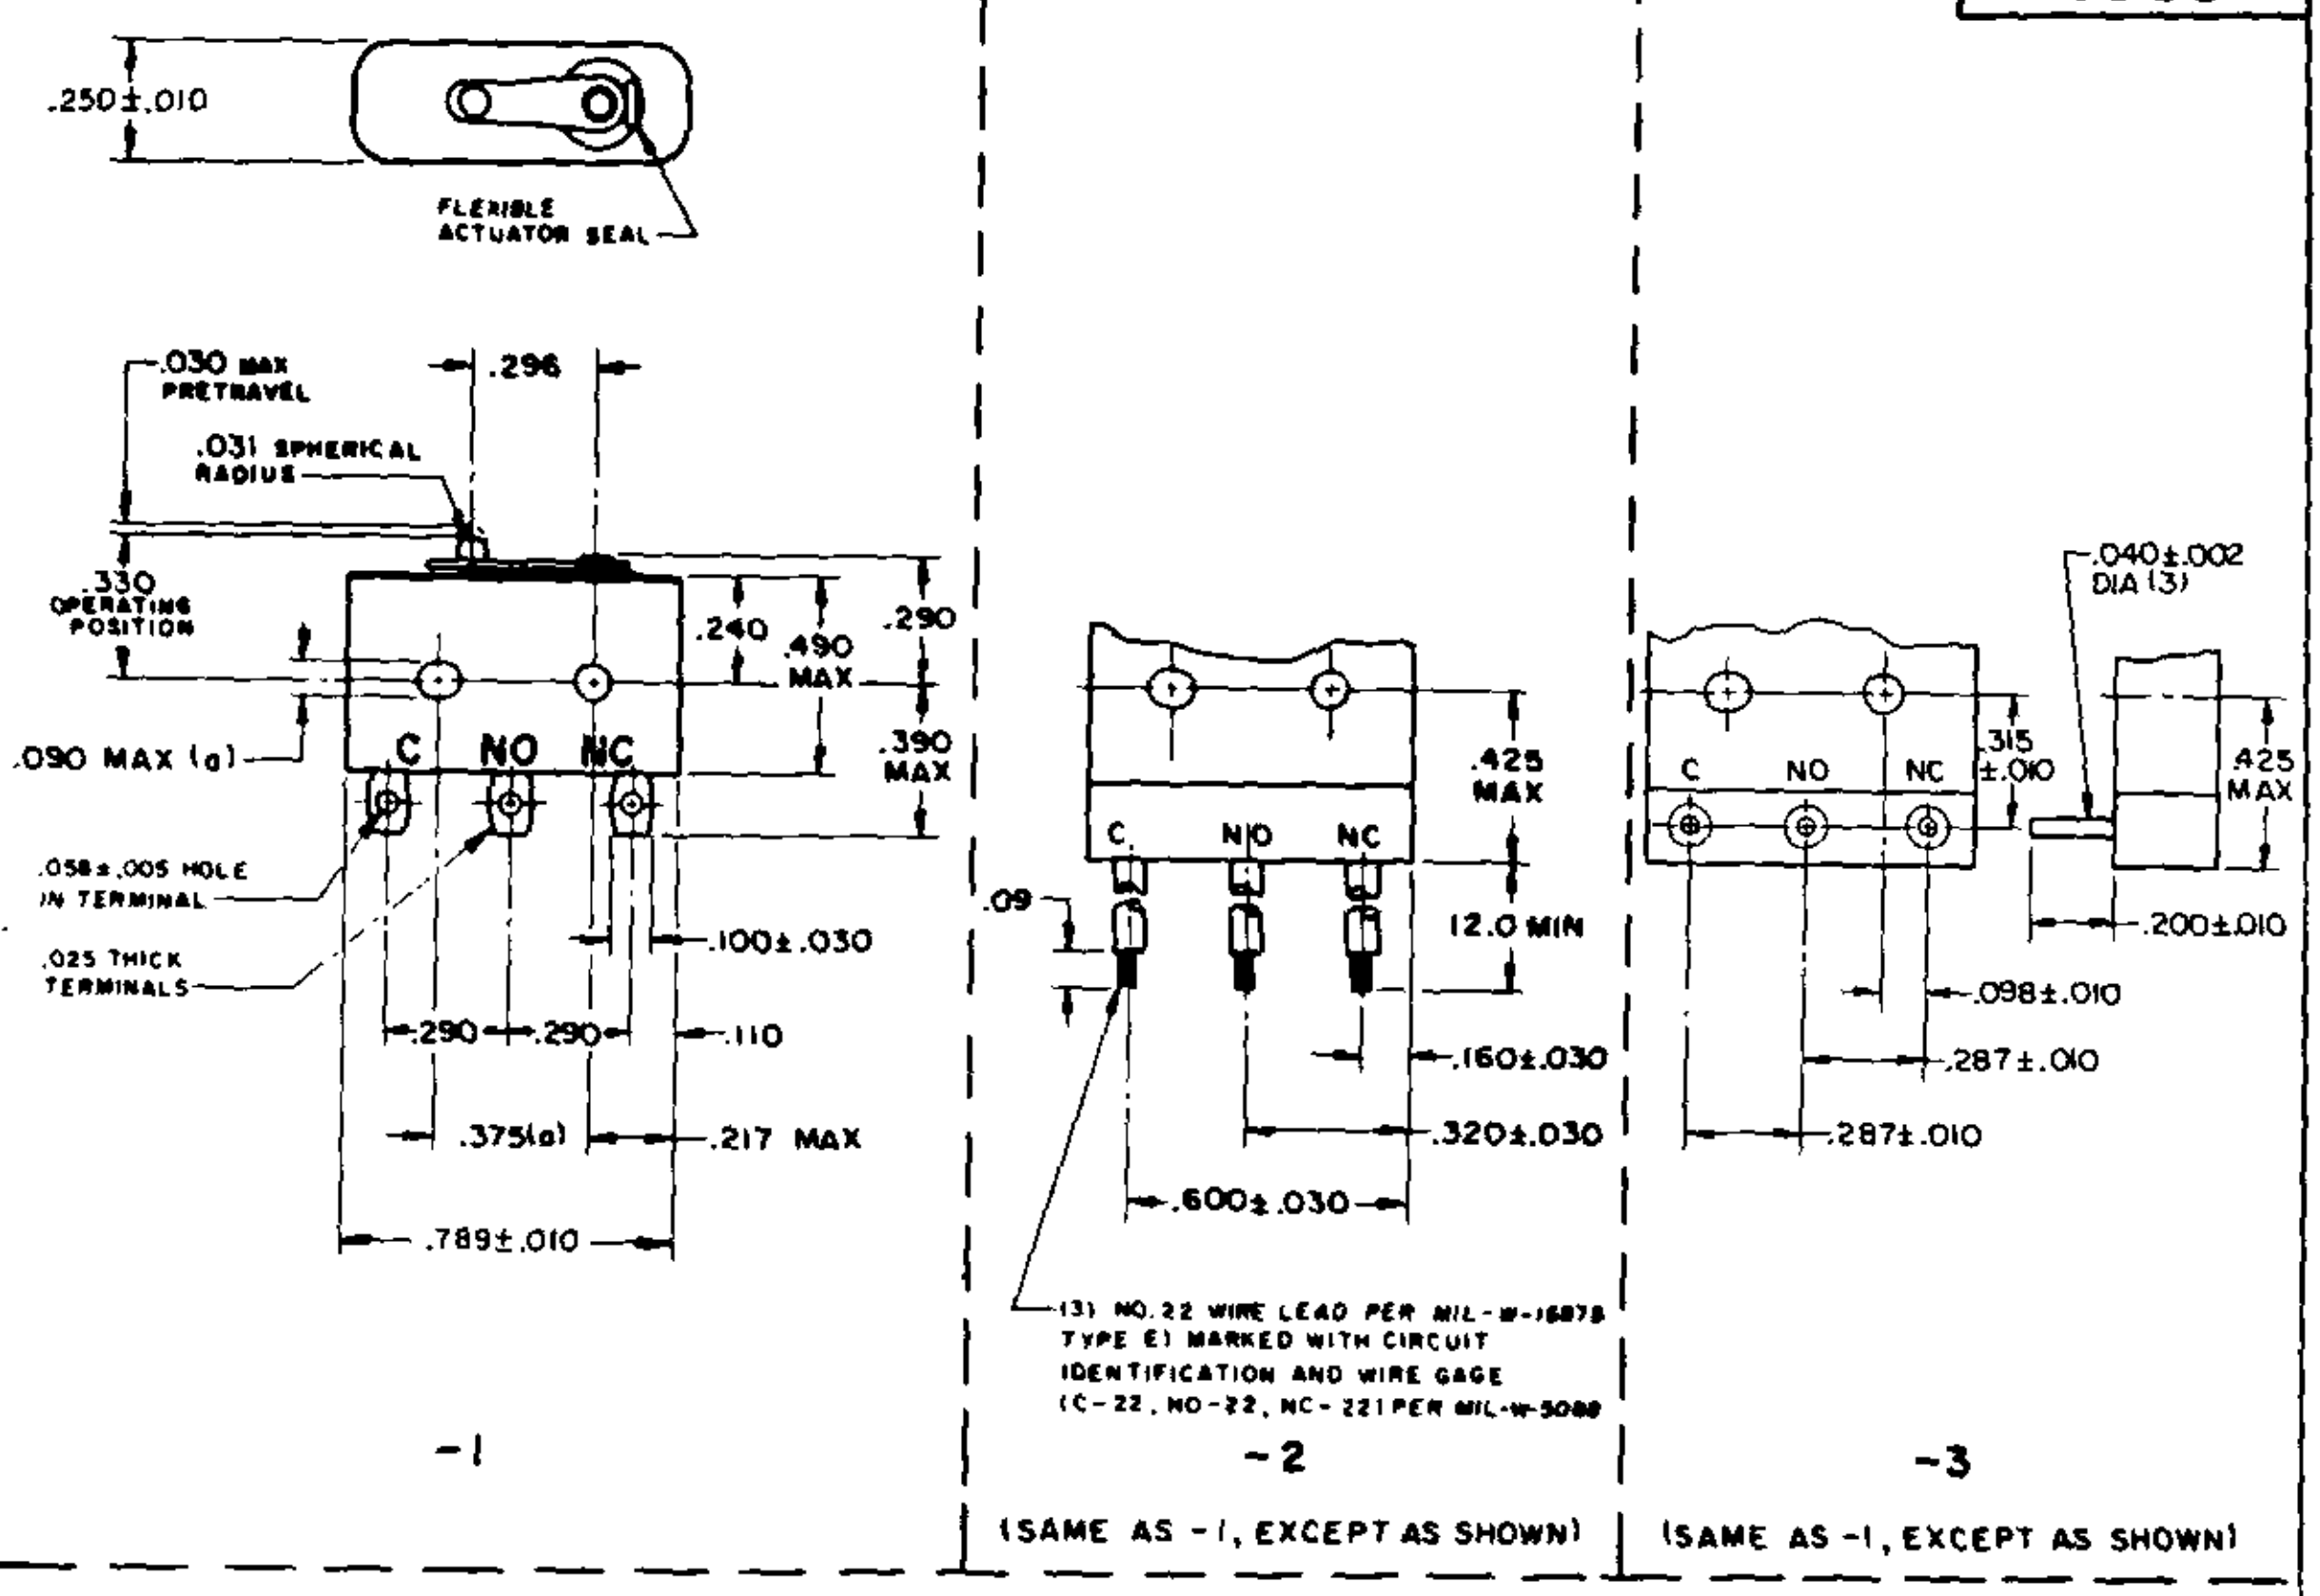

DASH NO.	TERMINATION	TEMPERATURE RANGE
-1	SOLDER △3	-300° F TO +250° F
-2	WIRE LEAD	-65°F TO +250°F (-300°F TO +250° F IF WIRE LEADS ARE NOT FLEXED)
-3	CIRCUIT BOARD PLUG - IN △3	-300° F TO +250° F

DETAIL REQUIREMENTS:

(A) CONTACT ARRANGEMENT - SINGLE POLE DOUBLE THROW
(B) RATED LOAD: (DC 28 VOLTS)
RESISTIVE - - - - - - - - - - - - - - - - - - - 5 AMP
INDUCTIVE - - - - - - - - - - - - - - - - - - - 3 AMP
MOTOR - - - - - - - - - - - - - - - - - - - 4 AMP
(C) MINIMUM OPERATING CYCLES - - - - - - - - - - 25,000
(D) ACTUATING FORCE - - - - - - - - - - - - - - 7 OZ MAX

(E) RELEASE FORCE - - - - - - - - - - - - - 1 OZ MIN
(F) MOVEMENT DIFFERENTIAL - - - - - - - - - .006 MAX
(G) PRETRAVEL - - - - - - - - - - - - - - .030 MAX
(H) OVERTRAVEL - - - - - - - - - - - - - - .003 MIN
(I) STRENGTH OF PLUNGER PIN AND PIN STOP - - - 10 LB
(J) STRENGTH OF TERMINALS - - - - - - - - - 10 LB
(K) MAXIMUM WEIGHT - - - (-1) AND (-3) .014 LB, (-2) .026 LB

(a) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS. MOUNTING MEANS IS DIRECTLY INTERCHANGEABLE WITH MILITARY STANDARD PART MS25085

Ⓐ CANCELLED FOR PROCUREMENT USE MIL-S-8805/8

NOTE -

1 - CIRCUITS MUST BE INTERRUPTED IN A CHAMBER HERMETICALLY SEALED BY A FUSION OF METAL TO METAL, GLASS TO METAL, CERAMIC TO METAL, OR A COMBINATION THEREOF. THE LEAKAGE RATE OF THIS DESIGN SHALL NOT EXCEED 1×10^{-8} ATMOSPHERES CC/SEC. AT A PRESSURE DIFFERENTIAL OF ONE ATMOSPHERE

2 - THE TERMINAL DESIGNATION SHALL BE PERMANENTLY AND LEGIBLY MARKED ON SWITCH ENCLOSURE

△3 TERMINALS ARE TINNED FOR SOLDERING

4 - EXACT SHAPE OF SWITCH OPTIONAL, PROVIDED DIMENSIONS SPECIFIED ARE NOT EXCEEDED

5 - DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: DECIMALS ±.015

6 - THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN

7 - REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

APPROVED 3 OCTOBER 1963 REVISED Ⓐ 10 OCTOBER 1968

P.A. AFLC/SGEE Other Cust	TITLE SWITCH, SENSITIVE - SUBMINIATURE HERMETICALLY SEALED	MILITARY STANDARD MS27216(USAF)
PROCUREMENT SPECIFICATION MIL-S-6743	SUPERSEDES:	SHEET 1 OF 1

NOTICE.--When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the [illegible] and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-513/A-2402