This standard has been approved by the Department of the U S A F and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 63 672-1 (Superseding MIL-C-27599 (USAF))
EDITION OF 1 SEP 63 MAY BE USED.

PROCUREMENT SPECIFICATION: MIL-C-27599 (USAF)
P.A.U. 15 Other Cust

SUPERSEDES:


TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, SOLDER TYPE, WALL MOUNTING FLANGE, HERMETIC SEAL, PIN, BAYONET COUPLING.

MILITARY STANDARD

MS27338

SHEET 1 OF 1

Ⓓ FOR CHANGES SEE SHT 1

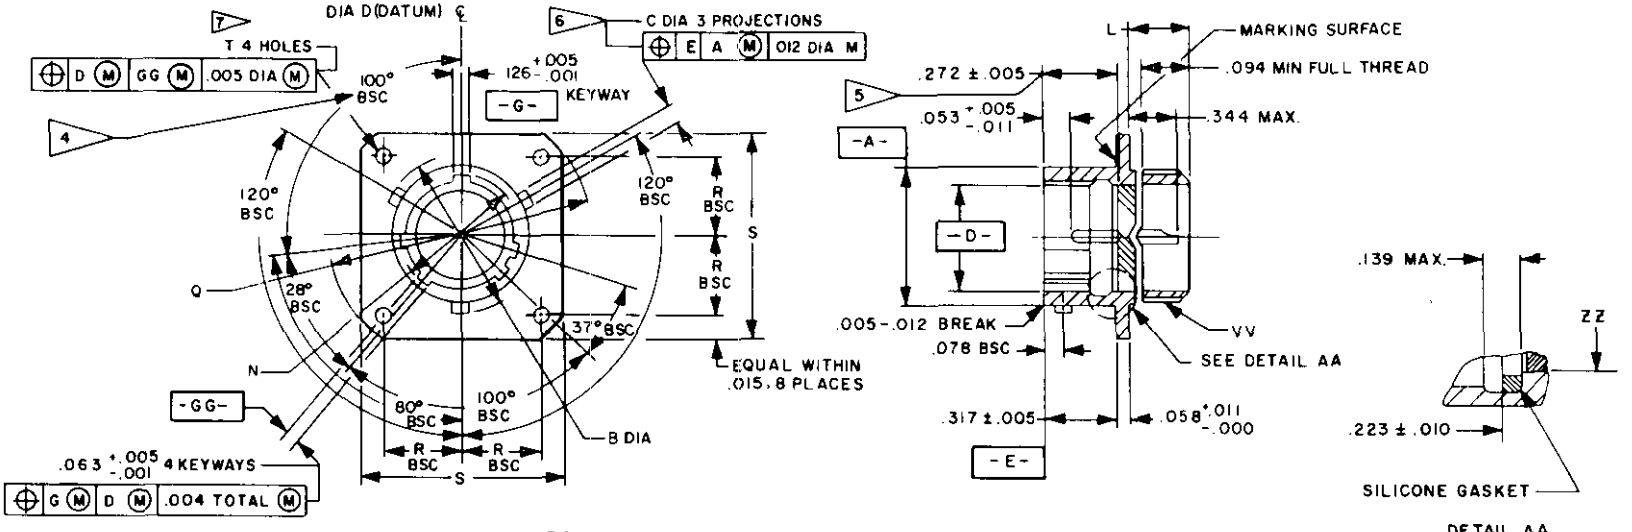

CLASS H STYLE P

DETAIL AA

SHELL SIZE	A +.001 -.005 DIA	B +.000 -.016 DIA OVER PROJ	C +.006 -.002 DIA	D +.005 -.001 DIA	L MAX	N +.005 -.006 DIA	Q MAX DIA	R BSC	S MAX	T +.010 -.005	CC		VV THREAD CLASS 2A UNEF	ZZ MIN DIA	FOR INSERT ARR. SEE DWG MS
8	.473	.563	.078	.362	.250	.412	1.078	.297	.828	.120	.004		9/16-24	.403	27343
10	.590	.680		.490		.540	1.266	.3595	.954		.010		11/16-24	.515	27344
12	.750	.859		.607		.689	1.391	.406	1.047				13/16-20	.629	27345
14	.875	.984		.732		.814	1.516	.453	1.141				15/16-20	.754	27346
16	1.000	1.108		.857		.939	1.641	.4845	1.234				1 1/16-18	.879	27347
18	1.125	1.233		.962		1.039	1.766	.531	1.328				1 3/16-18	.980	27348
20	1.250	1.358	.125	1.087	.344	1.164	1.891	.578	1.453				1 5/16-18	1.105	27349
22	1.375	1.483		1.212		1.289	2.016	.625	1.578				1 7/16-18	1.230	27350
24	1.500	1.610		1.337		1.414	2.204	.6875	1.703	.147			1 9/16-18	1.355	27351

NOTES:
1. DIMENSIONS IN INCHES.
2. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T I.R.
3. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER N SHALL BE CONCENTRIC AT MMC.
4. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS SEE TABLE A, FIGURE 2 OF PROCUREMENT SPECIFICATION.
5. DISTANCE TO BOTTOM OF GASKET GROOVE AND ALSO TO FACE OF VITREOUS INSERT.
6. THE GAGE FEATURES FOR GG SHALL BE CC SMALLER THAN MMC SIZE AT BASIC LOCATION.
7. THE GAGE FEATURES FOR GG SHALL BE .010 SMALLER THAN MMC SIZE AT BASIC LOCATION.

EXAMPLE OF PART NUMBER
MS27338 H 24 A 61 P A

MS NO.	CLASS	SHELL SIZE	FINISH (COLOR)	INSERT ARR. NUMBER	STYLE (P OR S)	POLARIZATION NO LETTER REQUIRED FOR NORMAL

Ⓓ CANCELED AFTER 15 DEC 80. FOR SIMILAR CONNECTOR USE MS27475.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERE IN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 28 JAN 66 REVISED (A) 10 AUG 66 (B) ENTIRE STD REDRAWN 1 FEB 67 (C) 20 DEC 67 (D) 15 DEC 80

FED. SUP CLASS 5935

GOVERNMENT PRINTING OFFICE — 1981: 703-023/840

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.