
FED. SUP CLASS
2925

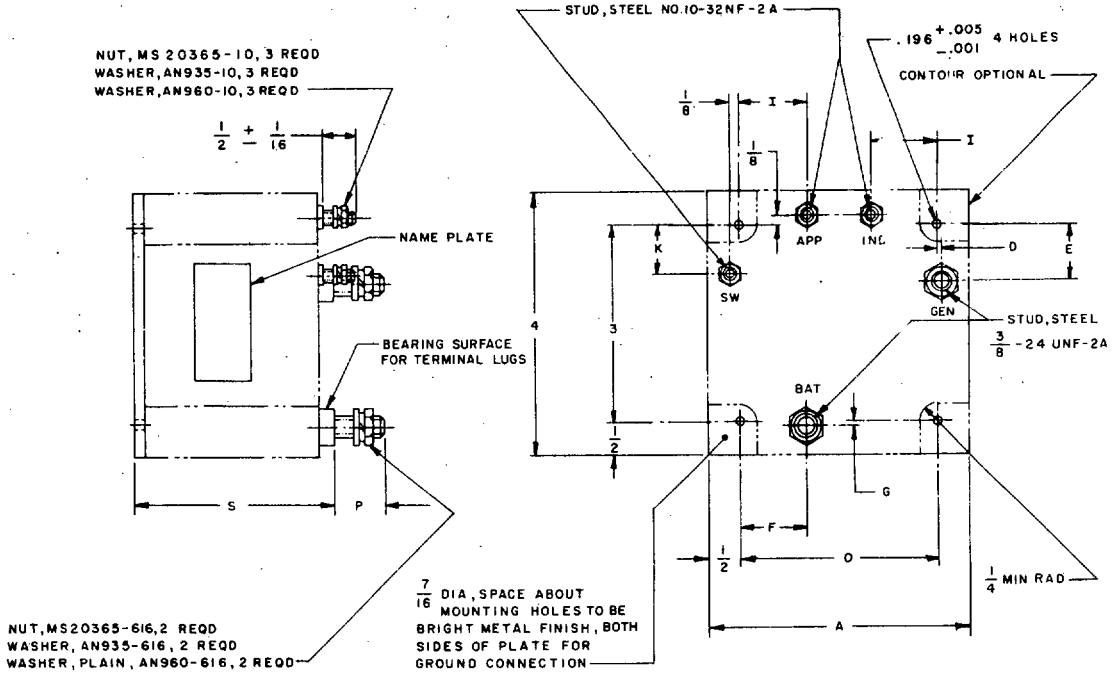

MS PART NUMBER	RATING AMP	OVERLOAD CURRENT AMP FOR 1 MINUTE	INTERRUPTING CAPACITY AMP	REVERSE CURRENT AMP MAX	REVERSE CURRENT AMP MIN	POTENTIAL DROP VOLT	WEIGHT MAX POUNDS	A	D	E	F	G	I	K	O	P ±1/16	S ±1/16
MS27433-300	300	600	2500	25	9	.10	3.00	4	1/16	7/8	1	1/16	1	3/4	3.000	3/4	3-1/16
MS27433-600	600	1200	5000	35	18	.125	3.90	5-1/2	0	1-1/4	1-1/2	0	1-1/2	1-1/4	4.500	13/16	3-1/32
MS27433-100	100	200	1500	10	4	.120	3.00	4	1/16	7/8	1	1/16	1	3/4	3.000	3/4	3-1/16

NOTES:

1. FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE MIL-STD-32.
2. GROUND NEGATIVE THROUGH MOUNTING BOLT.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ± .005.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS.
6. ALL TERMINALS WILL BE MARKED IN ACCORDANCE WITH THE FOLLOWING TABLE:

MARKING	IDENTIFICATION	LETTER HEIGHT (INCHES)
BAT	BATTERY, POSITIVE TERMINAL	7/32
GEN	GENERATOR, POSITIVE TERMINAL	
SW	REMOTE CONTROL SWITCH	1/8
APP	ACCESSORY POWER PLANT, POSITIVE	
IND	INDICATOR TERMINAL	

REVIEWERS:
ARMY - MO
AIR FORCE - 82

THIS MILITARY STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF DEFENSE AND IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 13 JULY 66 REVISED

P.A. AIR FORCE - 82
Other Cust
ARMY - MO

TITLE
CUTOUT RELAY, ENGINE GENERATOR, 28 VOLT DC SYSTEM

MILITARY STANDARD
MS27433

PROCUREMENT SPECIFICATION
MIL-C-5026

SUPERSEDES:
AN 3025

SHEET 1 OF 1

DD FORM 1 SEP 65 672-1 (coordinated)

EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.