This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 67 672-1 (Digitized coordination)

PROCUREMENT SPECIFICATION MIL-G-21480

SUPERSEDES:

P.A. NAVY - AS Other Cost

(B) CANCELLED AFTER 30 APRIL 80 NO SUPERSEDING STANDARD

TITLE


GENERATOR SYSTEM, 42 KVA, 400 CYCLE ALTERNATING CURRENT, INTEGRALLY EXCITED BRUSHLESS TYPE, OIL COOLED, 8000 RPM

MILITARY STANDARD

MS 28120(AS)

SHEET 1 OF 6

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. W-16

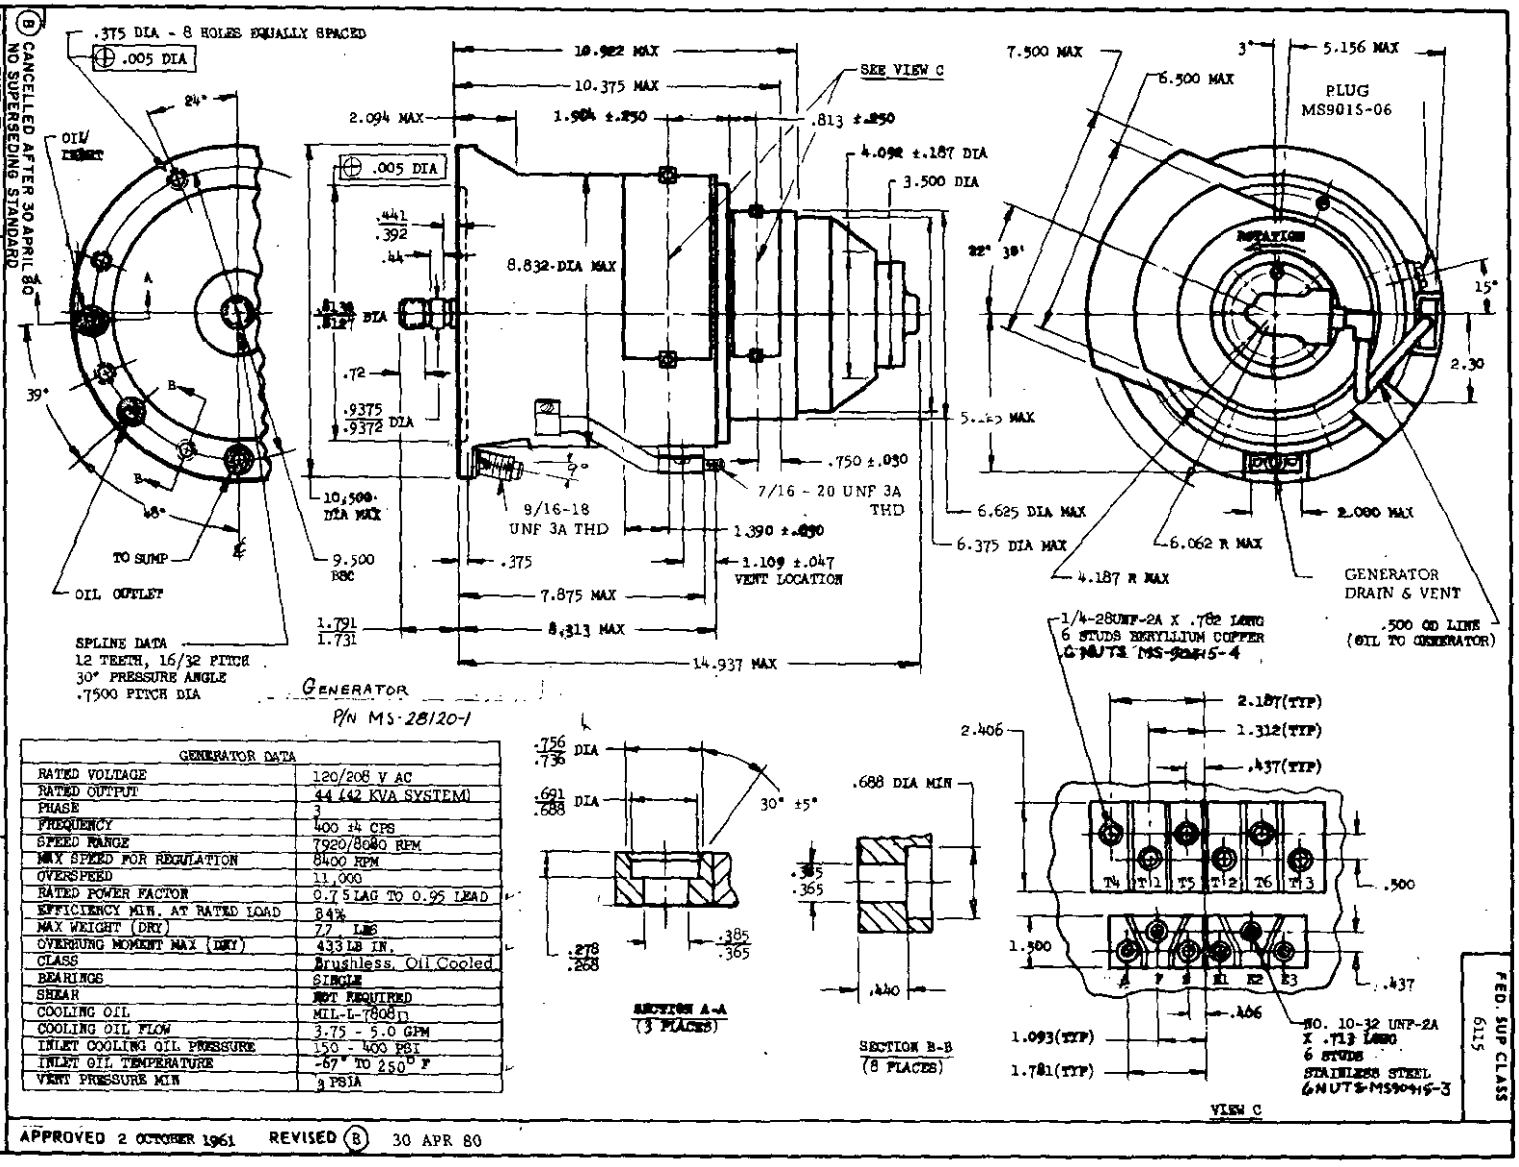

GENERATOR DATA	
RATED VOLTAGE	120/208 V AC
RATED OUTPUT	44 (42 KVA SYSTEM)
PHASE	3
FREQUENCY	400 ±4 CPS
SPEED RANGE	7920/8080 RPM
MAX SPEED FOR REGULATION	8400 RPM
OVERSPEED	11,000
RATED POWER FACTOR	0.75 LAG TO 0.95 LEAD
EFFICIENCY MIN. AT RATED LOAD	84%
MAX WEIGHT (DRY)	77 LBS
OVERHUNG MOMENT MAX (DRY)	433 LB IN.
CLASS	Brushless, Oil Cooled
BEARINGS	SINGLE
SHEAR	NOT REQUIRED
COOLING OIL	MIL-L-7808
COOLING OIL FLOW	3.75 - 5.0 GPM
INLET COOLING OIL PRESSURE	150 - 400 PSI
INLET OIL TEMPERATURE	-67° TO 250° F
VENT PRESSURE MIN	3 PSIA

FED. SUP CLASS 6115

APPROVED 2 OCTOBER 1961 REVISED (B) 30 APR 80

Source: https://assist.dla.mil -- Downloaded: 20240-23T16:57Z
Check the source to verify that this is the current version before use.