

NOTICE — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory for use by all Navy engineering and design activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED SUP CLASS
5935

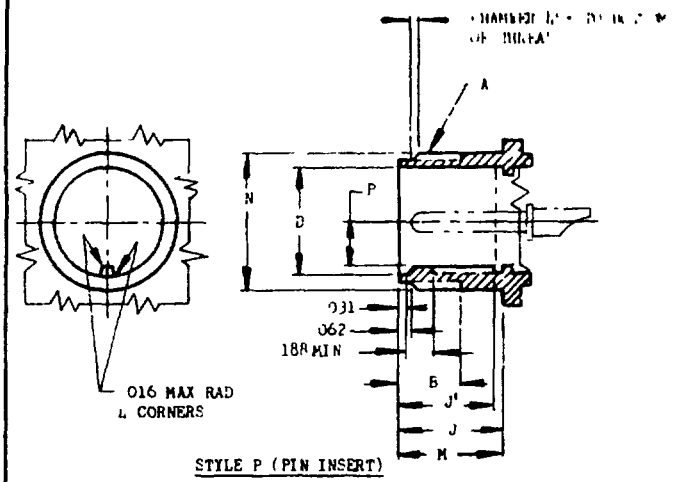

STYLE P (PIN INSERT)

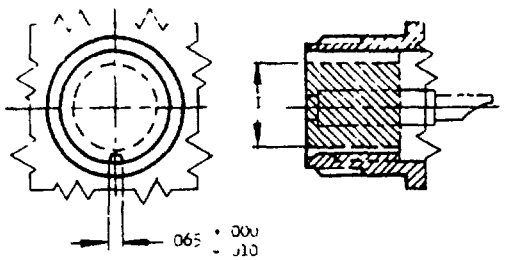

STYLE S (SOCKET INSERT)

ENVIRONMENT RESISTING (R) RECEPTACLE

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 ID	I MAX INSERT DIA	J +.031 -.000	J' +.031 -.000 INSERT LOCATION	P +.031 -.000 MOUNTING FLANGE LOCATION	N MAX OD	P +.015 -.000 KEY HEIGHT	FOR INSERT ARRANGEMENT SEE DRAWING
8S	1/2-20	.375	.370	.550	.562	.562	.562	.532	.130	MS33682
10S	5/8-24		.448	.323				.656	.165	
10SL										
12S	3/4-20		.557	.448				.782	.224	MS33681
14S	7/8-20		.682	.525				.906	.263	MS33682
16S	1 -20		.80	.650				1.032	.325	MS33683
12	3/4-20	.625	.557	.448	.75	.750	.750	.782	.224	MS33682
14	7/8-20		.682	.525				.906	.263	MS33682
16	1 -20		.807	.650				1.032	.325	MS33683
18	1-1/8-18		.932	[illegible]				1.156	.388	MS33684
20	1-1/4-18		1.058	.900				1.282	.463	MS33685
22	1-3/8-18		1.182	1.025				1.406	.510	MS33686
24	1-1/2-18		1.307	1.150			.812	1.532	.573	MS33687
28	1-3/4-18		1.526	1.365				1.782	.683	MS33688
32	2 -18		1.745	1.615			.875	2.032	.808	MS33689
36	2-1/4-16		1.995	1.830				2.282	.915	MS33690

(a) WHERE RESILIENT INSERTS ARE USED, J' MAY BE .109 LESS THAN INDICATED

EXAMPLE OF DESIGN DESIGNATION MS33678R18-5S=ENVIRONMENT RESISTING, RECEPTACLE SIZE 18, INSERT ARRANGEMENT -5 (SEE MS33684), STYLE S (SOCKET CONTACTS, SEE FIGURE 2, MIL-C-5015)

MS3102R OR MODIFICATION THEREOF, MAY BE USED IN LIEU OF THIS DESIGN

FOR DESIGN DETAILS SEE SPECIFICATION MIL-C-5015

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ± .016

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

THIS IS A DESIGN STANDARD NOT TO BE USED AS A PART NUMBER

APPROVED 17 Dec 58 REVISED

P.A. Navy - Aer Other Cust Army - SigC USAF	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, INTEGRAL MOUNTING	MILITARY STANDARD MS33678
PROCUREMENT SPECIFICATION NONE	SUPERSEDES AND10066	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:06Z
Check the source to verify that this is the current version before use.