
FED. SUP CLASS
5935

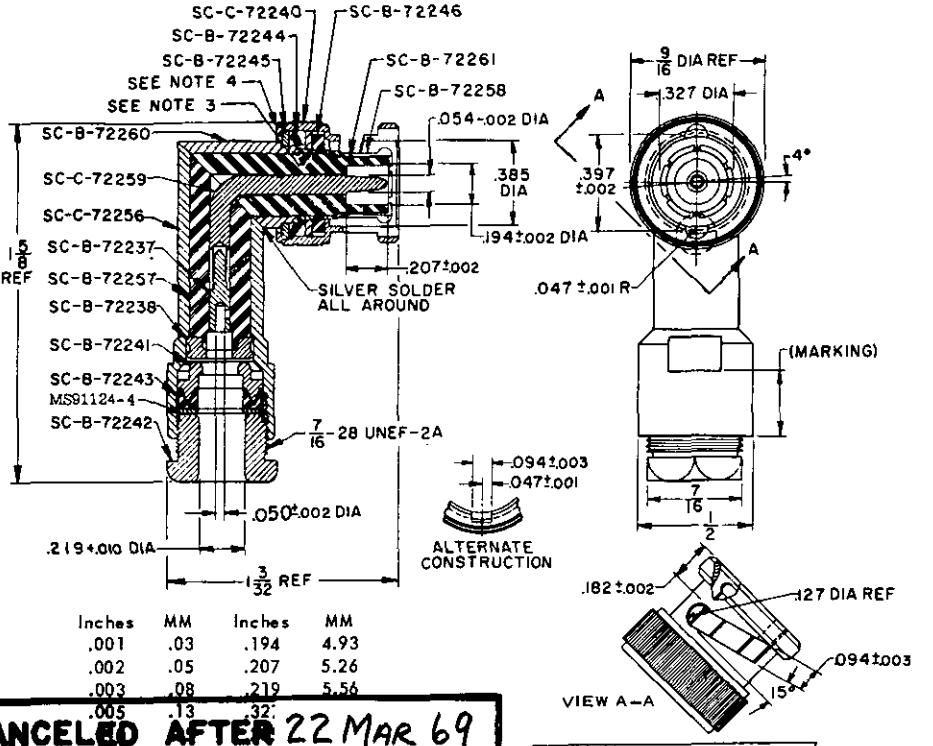

Inches	MM	Inches	MM
.001	.03	.194	4.93
.002	.05	.207	5.26
.003	.08	.219	5.56
.005	.13	.327	
.015	.40	.397	
.050	1.27	.500	12.70
.054	1.37	.562	14.29
.094	2.39	1.093	27.78
.127	3.23	1.625	41.28
.182	4.62		

Metric equivalents are for general information only and are based upon 1 inch = 25.4 mm.

CANCELED AFTER 22 MAR 69
USE MIL-C-39012/20-0001

MS PART NO. MS35367-913A

DRAWING NO.	DESCRIPTION	QTY
SC-B-72237	Contact	1
SC-B-72238	Bushing	1
SC-C-72240	Sleeve	1
SC-B-72241	Clamp	1
SC-B-72242	Nut	1
SC-B-72243	Gasket	1
SC-B-72244	Spring	3
SC-B-72245	Retainer	2
SC-B-72246	Gasket	1
SC-C-72256	Body	1
SC-B-72257	Insulator	1
SC-B-72258	Contact	1
SC-C-72259	Contact	1
SC-B-72260	Body	1
SC-B-72261	Insulator	1
MS91124-4	Washer	1

1. All dimensions in inches.
2. Unless otherwise specified, tolerances are ±1/64 on fractions, ±.005 on decimals and ±1/2° on angles.
3. Spot stake at four points approximately 90° apart and solder. Must resist a withdrawal force of 50 lbs.
4. Form over all around.
5. Plug UG-913A/U replaces plug UG-913/U.
6. The part number consists of the MS military-standard number followed by a dash number. The dash number "913A" is derived from assigned nomenclature.
7. Referenced documents shall be of the issue in effect on date of invitation for bids.
8. This standard takes precedence over documents referenced herein.

ENGINEERING DATA: SMALL, WEATHERPROOF, QUICK-DISCONNECT, RADIO-FREQUENCY COAXIAL CONNECTOR; NOMINAL IMPEDANCE, 50 OHMS; RATED AT 500 VOLTS PEAK; PRACTICAL FREQUENCY LIMIT, 10,000 MC/SEC; FOR USE WITH RG-55, -58, AND -223/U RF CABLES. THIS CONNECTOR AND CABLE RG-55/U ARE NOT ELECTRICALLY MATCHED.

© ENTIRE STANDARD REVISED

APPROVED 30 Jun 54 — REVISED (A) 24 Oct 58 (B) 18 Oct 1960 (C) 23 June 1964 (D) CANCELLED 22 March 1969

User: MO

Review: MU, MI

This military standard is approved by the Department of Defense and is mandatory for all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EL Other Cust BuShips USAF	TITLE CONNECTOR, PLUG, ELECTRICAL, SERIES BNC, UG-913A/U	MILITARY STANDARD MS35367
PROCUREMENT SPECIFICATION MIL-C-3608	SUPERSEDES: MS35367(SigC)	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated) ☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-518/A-5386 5935-1665-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.