INCH-POUND
MS51868C
9 March 2011
SUPERSEDING
MS51868B
26 September 1975


DETAIL SPECIFICATION SHEET

# CLAMP, WIRE ROPE, DOUBLE SADDLED, DOUBLE-GRIP, STEEL, TYPE III

Reactivated after 9 March 2011 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and FF-C-450.

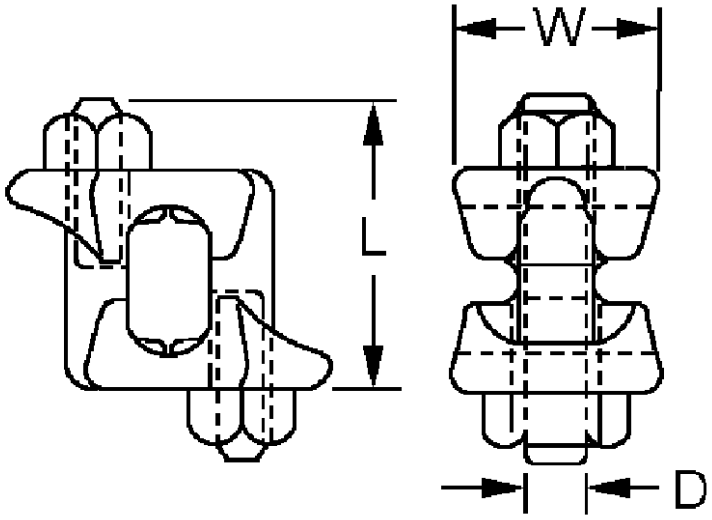



Type III, Class 1

FIGURE 1. Clamp, double grip, double saddled wire rope – type III, class 1.

AMSC N/A

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.

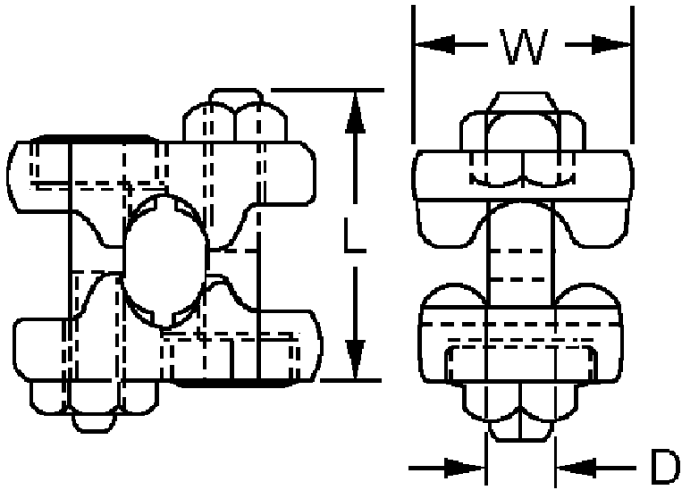


Type III, Class 2

FIGURE 2. Clamp, double grip, double saddled wire rope – type III, class 2.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.

TABLE I. Clamp dimensions and number of clamps used. 1/ 2/ 3/

| Dash number | | | | | | Clamp size | D | L |
|---|---|---|---|---|---|---|---|---|
| Hot dip galvanized | | Electrodeposited | | Mechanically deposited | | | | |
| Class 1 | Class 2 | Class 1 | Class 2 | Class 1 | Class 2 | | Thread minimum | Length minimum |
| 1 | 51 | 101 | 151 | 201 | 251 | 3/16 (.188) | 10-24 | 1.281 |
| 2 | 52 | 102 | 152 | 202 | 252 | 1/4 (.250) | 1/4-20 | 1.281 |
| 3 | 53 | 103 | 153 | 203 | 253 | 5/16 (.3125) | ¼-20 | 1.438 |
| 4 | 54 | 104 | 154 | 204 | 254 | 3/8 (.375) | 5/16-18 | 1.688 |
| 5 | 55 | 105 | 155 | 205 | 255 | 7/16 (.4375) | 7/16-14 | 2.125 |
| 6 | 56 | 106 | 156 | 206 | 256 | 1/2 (.500) | 7/16-14 | 2.125 |
| 7 | 57 | 107 | 157 | 207 | 257 | 9/16 (.5625) | 1/2-13 | 2.688 |
| 8 | 58 | 108 | 158 | 208 | 258 | 5/8 (.625) | 1/2-13 | 2.688 |
| 9 | 59 | 109 | 159 | 209 | 259 | 3/4 (.750) | 1/2-13 | 2.812 |
| 10 | 60 | 110 | 160 | 210 | 260 | 7/8 (.875) | 9/16-12 | 3.250 |
| 11 | 61 | 111 | 161 | 211 | 261 | 1 (1.00) | 3/4-10 | 3.562 |
| 12 | 62 | 112 | 162 | 212 | 262 | 1-1/8 (1.125) | 3/4-10 | 4.000 |
| 13 | 63 | 113 | 163 | 213 | 263 | 1-1/4 (1.250) | 3/4-10 | 4.250 |
| 14 | 64 | 114 | 164 | 214 | 264 | 1-3/8 (1.375) | 7/8-9 | 5.438 |
| 15 | 65 | 115 | 165 | 215 | 265 | 1-1/2 (1.500) | 1-8 | 5.438 |

| Dash number | | | | | | W | Minimum number of clamps recommended | |
|---|---|---|---|---|---|---|---|---|
| Hot dip galvanized | | Electrodeposited | | Mechanically deposited | | Width | | |
| Class 1 | Class 2 | Class 1 | Class 2 | Class 1 | Class 2 | Minimum | Class 1 | Class 2 |
| 1 | 51 | 101 | 151 | 201 | 251 | 0.938 | 2 | 2 |
| 2 | 52 | 102 | 152 | 202 | 252 | 0.938 | 2 | 2 |
| 3 | 53 | 103 | 153 | 203 | 253 | 1.062 | 2 | 2 |
| 4 | 54 | 104 | 154 | 204 | 254 | 1.062 | 2 | 2 |
| 5 | 55 | 105 | 155 | 205 | 255 | 1.188 | 3 | 2 |
| 6 | 56 | 106 | 156 | 206 | 256 | 1.250 | 3 | 3 |
| 7 | 57 | 107 | 157 | 207 | 257 | 1.375 | 3 | 3 |
| 8 | 58 | 108 | 158 | 208 | 258 | 1.500 | 3 | 3 |
| 9 | 59 | 109 | 159 | 209 | 259 | 1.750 | 3 | 2 |
| 10 | 60 | 110 | 160 | 210 | 260 | 2.125 | 4 | 3 |
| 11 | 61 | 111 | 161 | 211 | 261 | 2.250 | 5 | 4 |
| 12 | 62 | 112 | 162 | 212 | 262 | 2.312 | 5 | 4 |
| 13 | 63 | 113 | 163 | 213 | 263 | 2.500 | 6 | 5 |
| 14 | 64 | 114 | 164 | 214 | 264 | 2.750 | 6 | 5 |
| 15 | 65 | 115 | 165 | 215 | 265 | 3.000 | 7 | 5 |

1/ Dimensions are in inches.
2/ Metric equivalents are given for information only.
3/ All dimensions are “reference” dimensions.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .188 | 4.77 | .625 | 15.87 | 1.188 | 30.17 | 1.750 | 44.45 | 2.812 | 71.42 |
| .250 | 6.35 | .750 | 19.05 | 1.250 | 31.75 | 2.125 | 53.97 | 3.000 | 76.20 |
| .313 | 7.95 | .875 | 22.22 | 1.281 | 32.53 | 2.250 | 57.15 | 3.250 | 82.55 |
| .375 | 9.52 | .938 | 23.82 | 1.375 | 34.92 | 2.312 | 58.72 | 3.562 | 90.47 |
| .438 | 11.12 | 1.000 | 25.40 | 1.438 | 36.52 | 2.500 | 63.50 | 4.000 | 101.60 |
| .500 | 12.70 | 1.062 | 26.97 | 1.500 | 38.10 | 2.688 | 68.27 | 4.250 | 107.95 |
| .562 | 14.28 | 1.125 | 28.57 | 1.688 | 42.87 | 2.750 | 69.85 | 5.438 | 138.12 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.

TABLE II. Clamp type III, class 1 weight minimum in lbs. 1/

| Type III Class 1 | | | |
|---|---|---|---|
| Clamp size | | Weight minimum | |
| Inches | mm | lbs. | kg |
| 3/16 (.188) | 4.77 | .21 | 0.0952 |
| 1/4 (.250) | 6.35 | .21 | 0.0952 |
| 5/16 (.3125) | 7.95 | .26 | 0.1179 |
| 3/8 (.375) | 9.52 | .37 | 0.1678 |
| 7/16 (.4375) | 11.12 | .48 | 0.2177 |
| 1/2 (.500) | 12.70 | .60 | 0.2721 |
| 9/16 (.5625) | 14.28 | 1.08 | 0.4898 |
| 5/8 (.625) | 15.87 | 1.08 | 0.4898 |
| 3/4 (.750) | 19.05 | 1.34 | 0.6078 |
| 7/8 (.875) | 22.22 | 2.20 | 0.9979 |
| 1 (1.00) | 25.40 | 2.68 | 1.2156 |
| 1-1/8 (1.125) | 28.57 | 2.96 | 1.3426 |
| 1-1/4 (1.250) | 31.75 | 4.03 | 1.8279 |
| 1-3/8 (1.375) | 34.92 | 6.58 | 2.9846 |
| 1-1/2 (1.500) | 38.10 | 6.58 | 2.9846 |

1/ Metric equivalents are given for information only.

REQUIREMENTS:

Clamps shall be in accordance with figure 1, figure 2, and table I.

Material steel, carbon shall be in accordance with Type III, Class I and Type III, Class 2 of FF-C-450. Bolts of Class 2 clamps shall be equivalent to SAE-J429 or ASTM-A449 grade 5 steel or better.

Protective coating shall be, mechanically deposited zinc coating in accordance with ASTM-B695, Type II, Class II, zinc coated (hot dip galvanized) in accordance with ASTM-A153/A153M or zinc coating (electrodeposited) in accordance with ASTM B633, Fe/Zn 5, type VI.

Threads shall be in accordance with procurement specification.


Marking shall be in accordance with procurement specification.

4. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.

5. In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.

Part or Identifying Number (PIN).

Example of a PIN: MS51868-1.

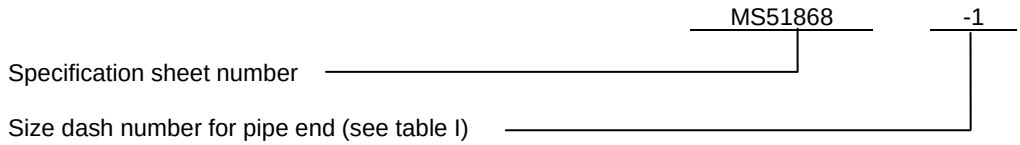




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to FF-C-450, this document references the following:

ASTM-A153/A153M
ASTM-A449
ASTM B633
ASTM-B695
SAE-J429

## CONCLUDING MATERIAL

Custodians:
Army – AR
Navy – SH
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 4030-2010-004)

Review activities:
Army – AT, AV, CR4, GL
Navy – MC, SA, YD
Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.