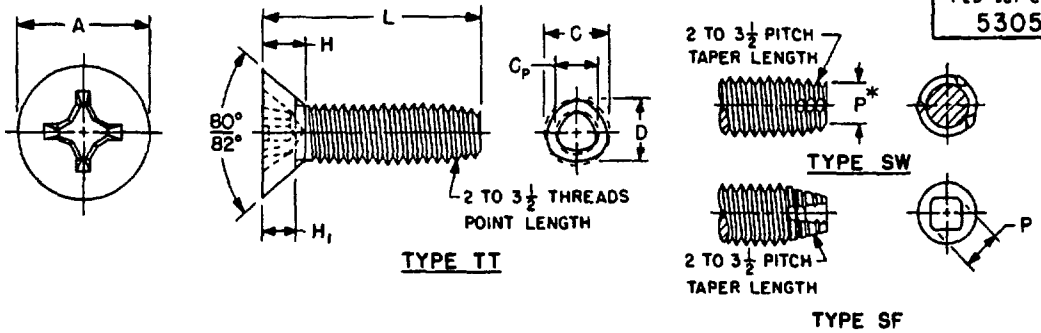


NOMINAL SIZE			138		190		.250
THREADS PER INCH			32		24		20
A	HEAD DIAMETER	MAX SHARP MIN FLAT	.279 244		.385 340		.507 .452
H	HEAD HEIGHT	REF	.083		116		.153
H_1	HEAD HEIGHT UNDERCUT	MAX MIN	059 048		081 .068		.107 092
C	DIAMETER	MAX MIN	141 .135		.194 188		2550 .2490
C_p	POINT DIAMETER	MAX	111		.153		.206
D	ACROSS CENTER	MAX MIN	135 .129		.185 .179		.246 .240
P*	POINT DIAMETER TYPE SW	MAX MIN	.096 .091		1295 1245		.180 .175
P	POINT DIAMETER TYPE SF	MAX MIN	.106 .095		.147 .133		.198 .181

L LENGTH	TOL	DASH NUMBER					
		CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL
.250	+.000 -.030	1	C1				
375		2	C2	12	C12		
500		3	C3	13	C13	23	C23
625		4	C4	14	C14	24	C24
750		5	C5	15	C15	25	C25
.875	+.000 -.050			16	C16	26	C26
1 000				17	C17	27	C27
1.250						28	C28
1 500						29	C29
1.750	+.000 - 060					30	C30
2 000						31	C31

* Before threading

NOTES
1. MATERIAL Carbon steel and corrosion-resisting steel (410) in accordance with procurement specification.
2. PROTECTIVE COATING Carbon steel - Cadmium plated in accordance with QQ-P-416, Type II, Class 2 or MIL-C-81562, Type II, Class 2
   Corrosion-resisting steel - Passivated in accordance with QQ-P-35.
3. THREADS The threads shall be in accordance with the applicable requirements of the procurement specification
4. RECESS The recess shall be in accordance with MS9006
5. DIMENSIONS All dimensions are in inches, unless otherwise specified.
6. SHORT LENGTHS Lengths above dashed line shall have undercut heads.
7. PART NUMBER The MS part number consists of the MS number, plus the dash number
   Example MS51870-1
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein
10. Type TT tri-lobular section is maintained throughout the full length of the screw.

REVIEWER AV, IS, MU, NS
USER AS, AT, MC, ME, OS, YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 29 SEP 1972 REVISED

P* WC Other Cust SH 82	TITLE SCREW, TAPPING-HIGH PERFORMANCE, THREAD ROLLING, TYPES SF, SW AND TT, FLAT COUNTERSUNK HEAD, CROSS-RECESSED	MILITARY STANDARD MS51870
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES BQBX1 and in part BCXX2.3, BCXX4.4 and BQBX1 3	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.