
MS9685

FED SUP CLASS 5306

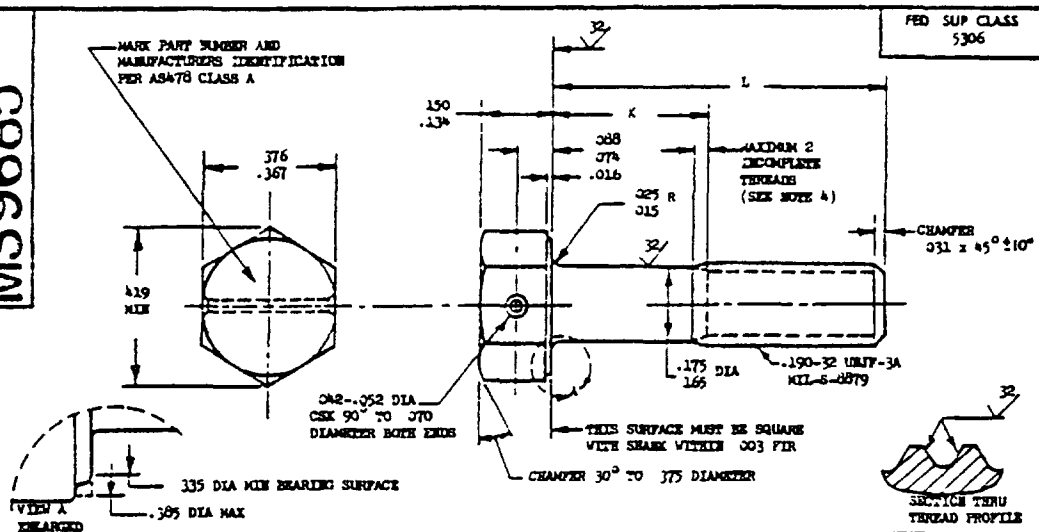

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9685-03	312	.072- .092	70
MS9685-04	375	.072- .092	74
MS9685-05	438	.072- .092	78
MS9685-06	500	.072- .092	82
MS9685-07	562	.072- .092	86
MS9685-08	625	.072- .092	90
MS9685-09	688	.072- .092	.94
MS9685-10	.750	.072- .120	.98
MS9685-11	812	.122- .182	1.02
MS9685-12	875	.185- .245	1.06
MS9685-13	938	.248- .308	1.10
MS9685-14	1.000	.310- .370	1.15
MS9685-15	1.062	.372- .432	1.19
MS9685-16	1.125	.435- .495	1.23
MS9685-17	1.188	.498- .558	1.27
MS9685-18	1.250	.560- .620	1.31
MS9685-19	1.312	.622- .682	1.35
MS9685-20	1.375	.685- .745	1.38
MS9685-21	1.438	.748- .808	1.42
MS9685-22	1.500	.810- .870	1.46
MS9685-23	1.562	.872- .932	1.50
MS9685-24	1.625	.935- .995	1.54
MS9685-25	1.688	.998-1.058	1.58
MS9685-26	1.750	1.060-1.120	1.62
MS9685-27	1.812	1.122-1.182	1.66
MS9685-28	1.875	1.185-1.245	1.70
MS9685-29	1.938	1.248-1.308	1.74
MS9685-30	2.000	1.310-1.370	1.78
MS9685-31	2.125	1.435-1.495	1.86
MS9685-32	2.250	1.560-1.620	1.94
MS9685-33	2.375	1.685-1.745	2.02
MS9685-34	2.500	1.810-1.870	2.10
MS9685-35	2.625	1.935-1.995	2.18
MS9685-36	2.750	2.060-2.120	2.26
MS9685-37	2.875	2.185-2.245	2.34
MS9685-38	3.000	2.310-2.370	2.42
MS9685-39	3.125	2.435-2.495	2.50
MS9685-40	3.250	2.560-2.620	2.58
MS9685-41	3.375	2.685-2.745	2.66
MS9685-42	3.500	2.810-2.870	2.74
MS9685-43	3.625	2.935-2.995	2.82
MS9685-44	3.750	3.060-3.120	2.90
MS9685-45	3.875	3.185-3.245	2.98

1. SHANK SHALL BE STRAIGHT WITHIN .003 TOTAL PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .011 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL STEEL AMS 6304.
6. HARDNESS ROCKWELL C42-46
7. FINISH DIFFUSED NICKEL CADMIUM PLATE AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING CONTACT POINTS PERMISSIBLE.
8. MANUFACTURING SPECIFICATION AMS 7459
9. MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
10. SURFACE TEXTURE USAS B46.1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 8 Jul 71 REVISED

P.A. Air Force - 11 | INTERNATIONAL INTEREST: ASCC AIR STD 17/2 | Other Cust Navy - AS

TITLE: BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, PD SHANK STEEL AMS 6304, DIFFUSED NICKEL CADMIUM PLATE, .190-32 UNJF-3A

MILITARY STANDARD

MS9685

PROCUREMENT SPECIFICATION AMS7459

SUPERSEDES:

SHEET 1 OF 1

FORM 672-1 (Latest revision)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.