RR-C-82D
INTERIM AMENDMENT-2 (ARMY-GL)
April 28, 1970
SUPERSEDING
Int. Amendment-1 (Army-GL)
October 28, 1969

INTERIM AMENDMENT

TO

FEDERAL SPECIFICATION

CANS, ASH AND GARBAGE, CORRUGATED, TAPER-SIDE, ZINC-COATED: AND COVERS

This Interim Amendment was developed by the U.S. Army Natick Laboratories (GL), Natick, Massachusetts 01760, based on currently available technical information. It is recommended that Federal Agencies use it in procurement and forward recommendations for changes to the Preparing Activity at the address shown above. The General Services Administration has authorized Federal Agencies to use this Interim Amendment as a valid exception to Federal Specification RR-C-82D, dated January 24, 1969.

PAGE 2

Paragraph 2.1 Add "QQ- Z-325 - Zinc Coating, Electrodeposited, Requirements For"

Paragraph 2.2, lines 5 through 12. Delete and substitute the following:

"NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036).

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Boulevard, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T12:08Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

American Society for Testing and Materials (ASTM) Publication:

A90 - Method of Test for Weight of Coating on Zinc-Coating (Galvanized) Iron or Steel Articles

B117-64 - Method of Salt Spray (Fog) Testing

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103).

U.S. DEPARTMENT OF HEALTH, EDUCATION AND WELFARE

Federal Food, Drug, and Cosmetic Act and Regulations Promulgated Thereunder

(Application for copies should be addressed to the superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups, and using Federal agencies.)"

Add the following new paragraph in the proper sequence.

"3.1.1 Certification. Prior to the approval of the first article, if one is submitted, or prior to approval of the first shipment, the supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the seaming compound for the can and other substances incorporated in the seaming compound he proposes to supply under this specification meet the requirements of Federal Food, Drug, and Cosmetic Act; Food Additive Resulting from Contact with Containers or Equipment and Food Additives Otherwise Affecting Food. (Code for Federal Requirements for Contact with Food.) Acceptable evidence of meeting the requirements of this document shall be a certified report of compliance acceptable to the procuring activity."

Paragraph 3.3, at the end of paragraph. Add "providing the completed item complies with all applicable provisions of this specification."

Paragraph 3.3.1.1 Delete in its entirety and substitute the following:

"3.3.1.1 Sheet or strip, bare (black) or zinc-coated.

"3.3.1.1.1 Bare. Bare sheet or strip carbon steel shall be of thickness shown on figures 1, 2, 3 and 4 and conform to hot-rolled or cold-rolled, commercial quality of QQ-S-698.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

PAGE 3 (cont'd)

"3.3.1.1.2 Zinc-coated. Sheet or strip carbon steel shall conform to 3.3.1.1.1 and shall be continuously zinc coated with not less than 2 ounces per square foot total deposit (both surfaces), or not less than .0018-inch thick each surface when tested as specified in 4.4.2."

Add the following new paragraph in proper sequence:

"3.3.1.2.1 Bar, flat, zinc-coated. Flat bar specified in 3.3.1.2 shall be zinc coated on all surfaces, including edges, as specified in 3.3.1.1.2."

Paragraph 3.3.2 Delete in its entirety and substitute the following:

"3.3.2 Rivets, steel, flathead, tinners, bare (black) or zinc-coated finished.

"3.3.2.1 Bare. The bare steel rivets shall be commercial type as shown on figures 1 and 2.

"3.3.2.2 Zinc coated. The zinc-coated steel rivets shall be as specified in 3.3.2.1, with a coating conforming to type I, class 2 of QQ-Z-325."

Add the following new paragraph in proper sequence:

"3.3.3 Seaming compound. The seaming compound shall not flow, crack or become brittle when tested as specified in 4.4.7.1 and 4.4.7.2."

PAGE 4

Paragraph 3.4, continued, line 2, after "handles". Add a new sentence as follows: "The complete can and cover shall be fabricated from materials specified in .3.1.1.1, 3.3.1.2, and 3.3.2.1, and zinc coated in accordance with 3.5, after fabrication. Alternatively, they may be fabricated using materials conforming to 3.3.1.1.2, 3.3.1.2.1, and 3.3.1.3, 3.3.2.2, and 3.3.3, or a combination of these materials, provided the finished can meets the requirements of this specification."

Line 5, after "leak". Add "initially more than one drop per second, not more than .2 of one percent of contents, and shall stop leaking prior to the end of 24 hours after the filling of the can for the leak test."

Paragraph 3.4.1 Delete in its entirety.

Paragraph 3.4.2, line 8, after "seams". Add "for cans galvanized after fabrication. The side joints of cans made from zinc coated sheet steel (see 3.3.1.1.2) shall be groove seamed and compound lined using seaming compound specified in 3.3.3. The seaming compound shall be applied to the open seams prior to closing the seams."

Source: https://assist.dla.mil -- Downloaded: 2024-08-28T12:08Z
Check the source to verify that this is the current version before use.

PAGE 4 (cont'd)

Paragraph 3.4.2.1, line 6, at end of paragraph. Add "The bottom of cans made from zinc coated sheet steel (see 3.3.1.1.2) shall be formed as specified herein and double seamed and compound lined with seaming compound specified in 3.3.3. The seaming compound shall be applied to the bottom flange prior to double seaming with the body."

Paragraph 3.4.2.4, line 2, after "3.3.1.1". Insert "as applicable".

Line 4 Delete "bearing" and substitute "stop".

Line 8, after "handle". Delete "straps deformed more than 5 degrees" and substitute "stops deformed, allowing the handles to be raised more than 5 degrees above the original approximate 70 degrees from the body."

PAGE 5

Paragraph 3.4.3, lines 2 and 3. Delete "to develop a concave shape" and substitute "(see figures 1 and 2)."

Line 3, after "shall". Insert "be straight sided and".

Paragraph 3.5 Delete in its entirety and substitute the following:

"3.5 Finish. Components of the can and cover and the completed can and cover fabricated from steel specified in 3.3.1.1.1 and 3.3.1.2 shall be cleaned and loose scale or rust removed prior to being completely coated with zinc by the hot dip process. The weight of the coating shall be not less than 2 ounces per square foot (both surfaces) when tested as specified in 4.4.2.1 or thickness of coating shall be not less than 0.0018 inch thick (each surface) when tested as specified in 4.4.2.2. Components of the can and cover and the complete can and cover fabricated from steel specified in 3.3.1.1.2 and 3.3.1.2.1 or prefinished wire bales and handles shall be cleaned. All cans shall have no exposed inside or outside surface area of no zinc or damaged finish except cut edges of zinc coated steel sheet or strip specified in 3.3.1.1.2. The coating on all cans and covers shall adhere and not peel when tested as specified in 4.4.3. There shall be no visible red rust at any location on the can and cover when tested in accordance with 4.4.8. There shall be no visual cracks or flaking of the finish due to forming. Organic coatings shall not be used to cover exposed areas."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

PAGE 6

Paragraph 4.2, line 3. Delete "4.4.6" and substitute "4.4.8, as applicable."

Add the following new paragraph in proper sequence:

"4.3.1.1 Seaming compound. The seaming compound shall be tested in accordance with 4.4.7.1 and 4.4.7.2. The sample unit shall be 2 ounces of the seaming compound for each test. The test shall be conducted on each lot of seaming compound offered at one time. Failure to meet the requirements of 3.3.3 shall be cause for rejection of the lot."

Paragraph 4.3.2.1, line 3, after "(see 3.5)". Add "as applicable. Examination shall be made for application of seaming compound in seams of cans, prior to locking the seam when cans are made of zinc-coated sheet steel specified in 3.3.1.1.2. Any nonconformance shall be cause for rejection of the lot and the process shall be adjusted."

Paragraph 4.3.3, line 1. Delete "The zinc-coat weight", and substitute "When the supplier elects to test the zinc coating by weighing, the."

Line 6 Delete "of the process" and substitute "of the lot and the process shall be adjusted."

Lines 6 and 7 Delete the last sentence and substitute "When the supplier elects to test the zinc coating by the thickness test, the test shall be performed on the end item as specified in 4.4.2.2."

PAGE 7

Table I, defect No. 109, under defect column, line 2. Delete "nor" and substitute "or".

PAGE 8

Table I continued, under the "defect" column for defect No's. 120, 121, 122, and 123. Delete in their entirety and substitute the following in proper sequence:

"One or more spot welds missing (when applicable)
"One or more rivets missing (when applicable)
"One or more rivets missing (when applicable)
"One or more spot welds missing (when applicable)"

Defect 125, in the "defect" column. Delete "One spot weld missing (when applicable)" and substitute "One or more spot welds or rivets missing, as applicable."

PAGE 9

Table I, defect 220, in "defect" column, after "spaced". Add "or not type specified".

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the currentversion before use.

PAGE 10

Table II continued. Delete "Capacity" and all reference thereto and substitute the following:

"Characteristic	Requirement paragraph	Test procedure	Requirement applicable to Individual Unit	Lot Average	Sample unit	Inspection
Salt spray test	3.5	4.4.8	X	-----	one can or cover	Pass or fail"

Add the following new paragraph in proper sequence:

"4.3.8 Standard compliance. Proof of compliance with the requirements of 3.1.1 shall be submitted to the Government representative."

PAGE 11

Paragraph 4.4.3, line 2. Delete "weight on each can" and substitute "steel ball on the side of each can or top of each cover".

Paragraph 4.4.4, line 4, after "clips". Insert "and handle stop".

Paragraph 4.4.5, line 1, after "bail". Insert ", when furnished,".

Lines 8 and 9. Delete the last sentence in its entirety and substitute "The can shall then be tested as specified in 4.4.1."

Paragraph 4.4.6. Delete in its entirety.

Add the following new paragraphs in proper sequence:

"4.4.7 Seaming compound test.

"4.4.7.1 High temperature test. The seaming compound shall be spread and dried as a thin film on tin plate and exposed to a forced hot air oven at +212° F. for 40 hours. Failure to meet the requirements of 3.3.3 shall constitute failure of the test.

"4.4.7.2 Low temperature test. The seaming compound shall be spread and dried as a thin film on a tin plate and exposed to a temperature of -40° F. for 24 hours. The tin plate shall be bent back on itself so that the coating is on the outer surface. Failure of the seaming compound to meet the requirements of 3.3.3 shall constitute a failure of the test.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the current version before use.

PAGE 11 (cont'd)

"4.4.8 Salt spray test. Cans and covers shall be subjected to a 200 hour salt spray test in accordance with ASTM B117-64. No areas or edges of the cans or covers shall be protected during this test."

PAGE 18

Figure 4 Delete and substitute new figure 4.

MILITARY CUSTODIAN:


Army - GL

Preparing activity:


Army - GL

Project No. 7240-A155


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

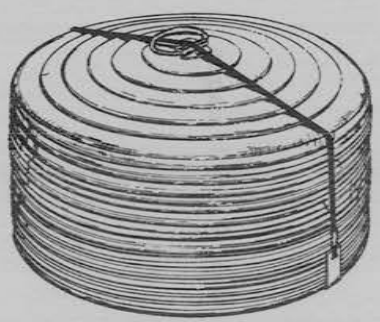

SINGLE STRAPPED

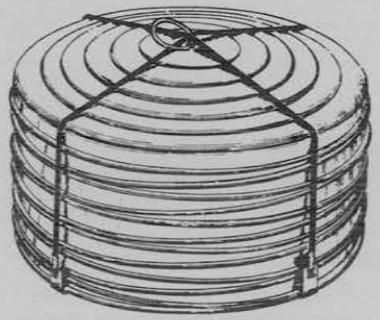



DOUBLE STRAPPED

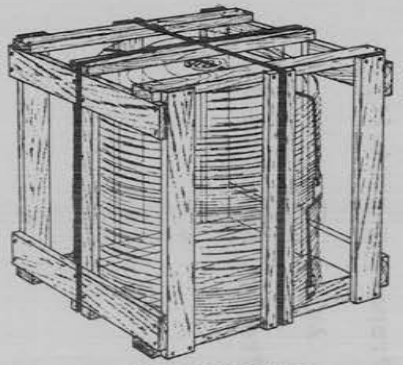


STRAPPED & CRATED

1. LUMBER:
   DIMENSIONS - MINIMUM 3/4" THICK, 2 3/8" WIDE.
   QUALITY - CONFORM TO PPP-C-650
2. NAILS:
   6d BOX, COATED. TWO TO EACH JOINT POSITIONED APPROXIMATELY 3/8" FROM EACH END & APPROXIMATELY 1/2" FROM EACH EDGE.
3. STRAPPING:
   3/8" X .020, TYPE I, CLASS B QQ-S-781
4. CLIPS:
   STEEL, LOW CARBON, SHEET OR STRIP, HOT OR COLD ROLLED, COMMERCIAL QUALITY, WIDTH 1 1/2"; THICKNESS 16 GAGE. TYPE I, II, III OR IV OPTIONAL
5. CONTAINER:
   DIMENSIONS SHALL BE DETERMINED FROM DIMENSIONS OF ITEMS TO BE PACKED.
7. DO NOT SCALE.
8. ALL CLIPS SHALL BE ZINC COATED.







TYPE I CLIP







TYPE II CLIP





TYPE III CLIP





TYPE IV CLIP

FIGURE - 4. CANS, ASH & GARBAGE, CORRUGATED, TAPER-SIDE, ZINC COATED; AND COVERS; CONTAINER FOR COVERS FOR [illegible] & AND, CLOSED, B SHIPMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.