RR-D-400B
May 13, 1969
SUPERSEDING
Fed. Spec. RR-D-400a
August 21, 1962

FEDERAL SPECIFICATION

DIPPERS, KITCHEN, (CORROSION-RESISTING STEEL)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type of corrosion-resisting steel kitchen dippers.

1.2 Classification.

1.2.1 Sizes. Dippers shall be of the following sizes, as specified (see 6.2):

Size 1 - One pint capacity.

Size 2 - One quart capacity.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issue in effect on date of invitation for bids, or request for proposal form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-B-636 - Box, Fiberboard.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-P-17667 - Paper, Wrapping, Chemically Neutral.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Sanitation Foundation (NSF) Publications:

Standard No. 2 - Food Service Equipment.
Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468, Ann Arbor, Michigan 48106.)

American Society for Testing and Materials (ASTM) Specification:

A167 - Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

National Classification Board:

National Motor Freight Classification Rules.

(Application for copies should be addressed to the National Classification Board, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill. 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), before production is commenced, a sample dipper of the size ordered shall be submitted or made available to the contracting officer or his authorized representative for examination and testing in accordance with 4.2. Approval of the preproduction sample authorizes commencement of production but does not relieve the supplier of responsibility for compliance with the detailed provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.2 Standard product. The kitchen dippers delivered under this specification shall be the manufacturer's commercially current standard product, except for any changes necessary to comply with specification requirements.

3.2.1 NSF standard. The kitchen dippers shall conform to the applicable requirements of NSF Standard No. 2.

3.2.1.1 NSF certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the kitchen dippers he proposes to furnish under this specification meet the applicable requirement of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished kitchen dippers shall be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment, or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

(2) A certified test report from a recognized independent testing laboratory acceptable to the medical authority functioning in advisory capacity to the preparing activity of the specification indicating that the kitchen dippers have been tested and conform to NSF Standard No. 2 shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to commencing production.

3.3 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for kitchen dippers provided the completed item complies with all provisions of this specification.

3.3.1 Corrosion-resisting steel. The corrosion-resisting steel sheet shall have a chemical composition conforming to any of the 300 series of ASTM A167-63.

3.4 Construction. The construction of the dippers shall conform to the requirements specified herein and as shown on figure I.

3.4.1 Body. The body shall be fabricated of one piece of corrosion-resisting steel specified in 3.3.1 and shall not have seams. The handle shall be attached to the body by not less than six spot welds, projection welding, or fillet welding all around the edge in contact with the body. When spot welding or projection welding is used the crevice between the handle end and body shall be sealed by welding or brazing. Welding shall be as specified in 3.4.2.

3.4.2 Welding. The welding shall be smooth, sound, and free from pits and flashes. All flux shall be removed. The welding rod for fillet welds shall have a chemical composition compatible with the base metal used for the body and handle.

3.4.3 Graduation markings, size 2. Graduation markings shall be embossed or indented on the size 2 dipper and shall be deep enough to be readily distinguishable. The marks shall be placed at intervals indicating units of 1/2 pint with an accuracy of plus or minus 2-1/2 percent (see 4.5.1).

3.5 Finish. All surfaces of the dippers shall be finished to meet NSF Standard No. 2.

3.6 Marking for identification. Each dipper shall be marked in a plain and permanent manner with the manufacturer's name, trade name, or trademark of such characters easily identifiable with the manufacturer. Markings shall be indented or embossed centrally on the outside bottom of the dipper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. The dippers shall be clean, contain no grease, buffing compound, stains, discoloration, or scratches. The dippers shall not be malformed, damaged, twisted, or distorted and shall be free from dents, buckles, wrinkles, rust, rough grind marks, pits, scale and die marks, burrs, sharp edges, or any other defects which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required it shall be examined for defects listed in table I and dimensions specified and tested as specified in 4.5.1. Failure to pass the test in 4.5.1 shall be cause for rejection of the preproduction sample. The presence of any defects listed in table I or any dimension not within specified requirements shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification, or applicable purchase document.

4.3.2 End item inspection. The inspection lot shall consist of all dippers of one size offered for inspection at one time. The sample unit shall be one completely fabricated dipper.

4.3.2.1 Visual examination. Examination of the end item shall be in accordance with the classification of defects listed in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 4.0 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of visual defects

Examine	Defect	Classification Major	Classification Minor
Finish	Not finished as specified	X	
Construction and workmanship	Stain or discoloration	X	
	Slight scratches		X
	Deep scratches (fingernail catches)	X	
	Not clean, contains grease or buffing compound	X	
	Malformed, damaged, twisted, or distorted	X	
	Dented, buckled, or wrinkled	X	
	Burrs or sharp edge that may cause injury	X	
Welding	Cracked or fractured	X	
	Burn-through	X	
	Flux not removed	X	
	Less than six spotwelds (when applicable)	X	
	Crevice not sealed when spot or projection welding used to attach handle	X	
	Not smooth or not free from pits or flashes		X
Marking	Omitted, incomplete, illegible		X
	Characters not indented or embossed, or in wrong location	X	
	Distortion or penetration on inside of body caused by indenting or embossing		X

4.3.2.2 Dimensional examination. Examination shall be made of representative samples of the dipper to determine compliance with dimensional requirements. The inspection level shall be S-2 with AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.3.2.3 End item testing. Testing shall be performed for the volume accuracy in accordance with 4.5.1. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level shall be 4.0 defects per hundred units.

TABLE II. Examination of preparation for delivery

Examination	Defect
Markings (exterior and interior container)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Contents (exterior and interior container)	Number of containers is more or less than required.

4.3.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.4 Standard compliance. Proof of compliance with the requirements of NSF, as applicable to 3.3 and 3.3.1 shall be available to the Government representative.

4.5 Test.

4.5.1 Volume accuracy (size 2). The size 2 dipper shall be filled with water to the upper graduated mark. The water content of the dipper shall then be poured back into a graduated beaker to check the accuracy of the dipper capacity marking to determine compliance with 3.4.3. Each graduation mark on the dipper shall be checked in the same manner. Nonconformance to paragraph 3.4.3 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Six of the size 1 or three of the size 2 dippers shall be nested in a stack and slip-sheeted with minimum 15 pound basis weight wrapping paper conforming to type I of MIL-P-17667. Each stack shall then be overwrapped in the same type paper, except that the minimum basis weight shall be 30 pounds. The wrap shall be secured with tape conforming to type III of PPP-T-45.

5.1.1.2 Intermediate package. Twelve of the size 1 dippers in two stacks of six each or six of the size 2 dippers in two stacks of three each shall be nested with the handles of one stack inserted into the bowl of the other. The dippers shall then be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Box closure shall be in accordance with the appendix of PPP-B-636.

5.1.2 Level C. The dippers shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Seventy-two size 1 or forty-eight size 2 dippers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Seventy-two size 1 or forty-eight size 2 dippers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2) the shipping container shall be a grade V3c or V3s, fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto. The shipping container material may also be grade V4s of PPP-F-320.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Dippers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Rules, as applicable.

5.3 Palletization. When specified (see 6.2) dippers packed as specified, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The dippers covered by this specification are intended for use in transferring bulk liquid from pots and kettles to serving pans in kitchens.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) First article. When a preproduction sample is not required (see 3.1).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B (see 5.2.2.1).
(f) When palletization is required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - SA, MS
Air Force - 84


User activity:

Navy - MC

Preparing activity:

Army - GL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

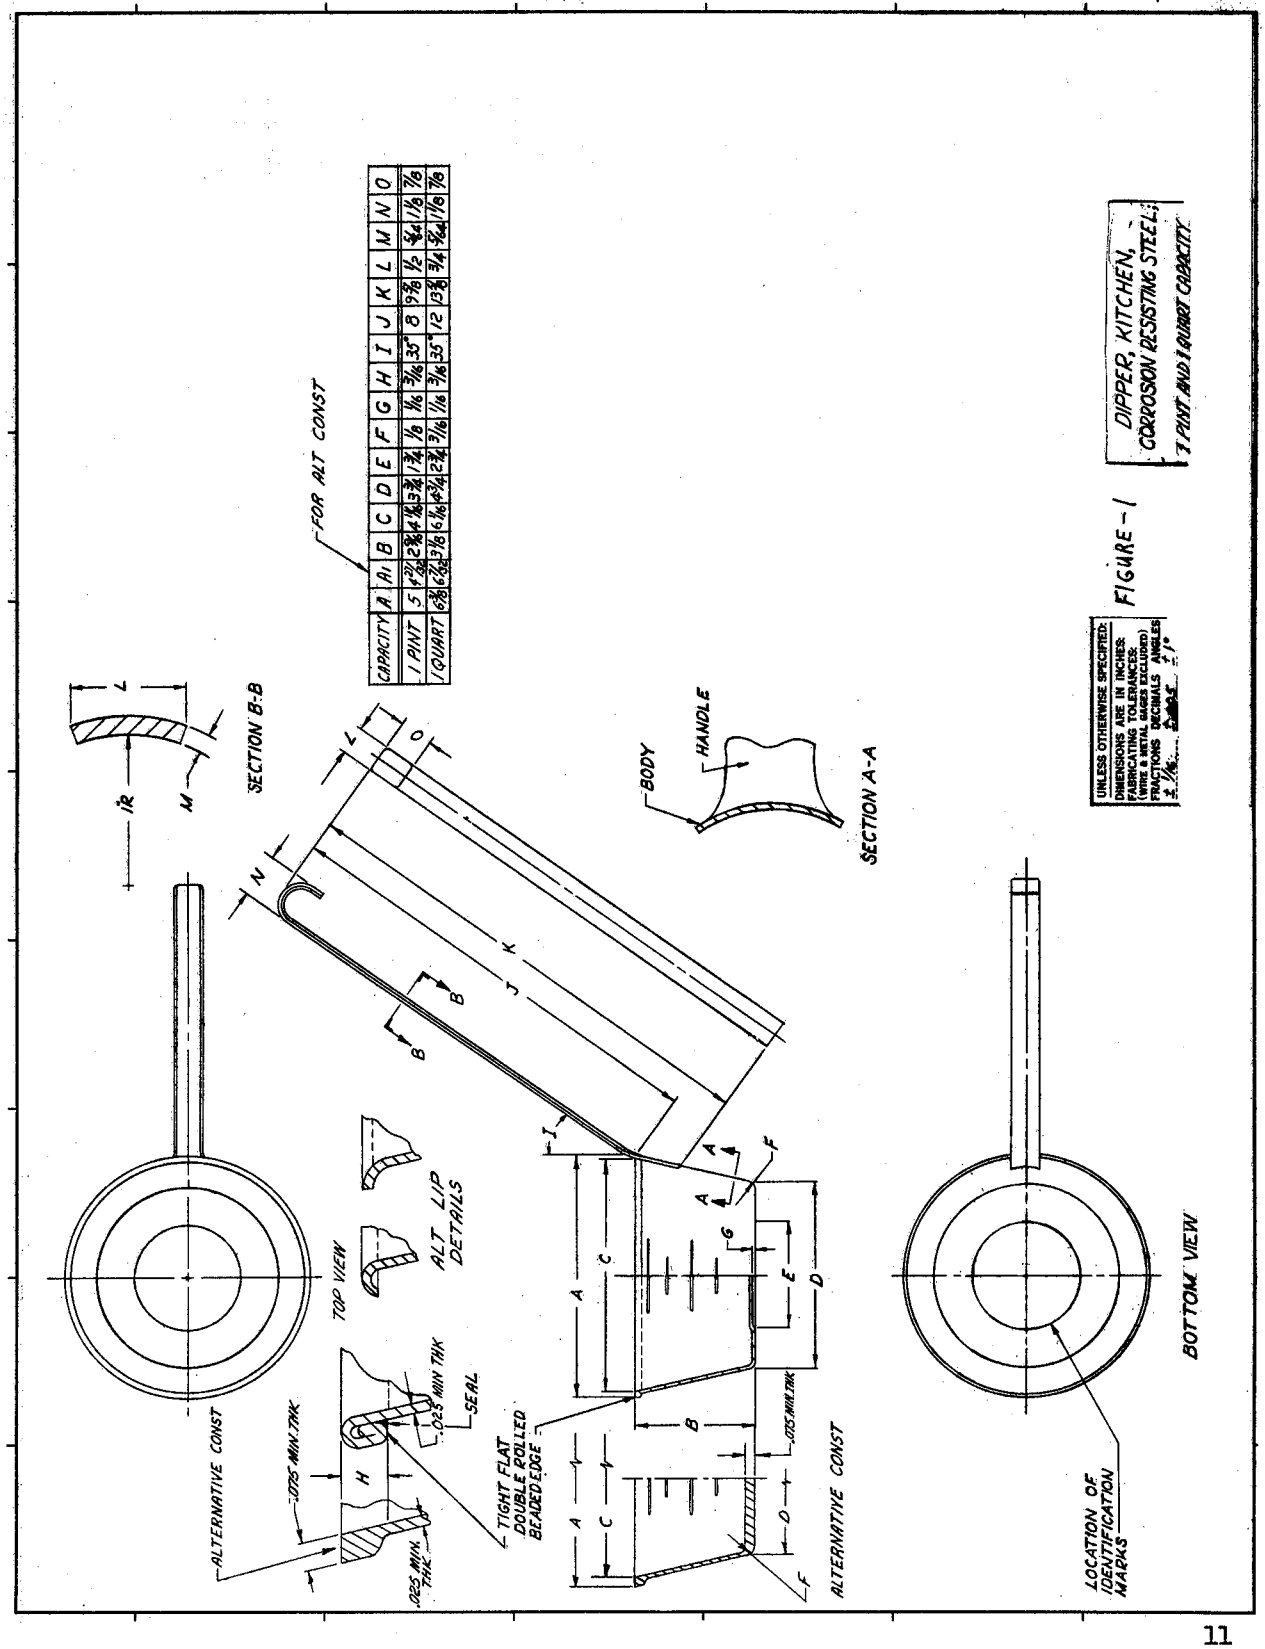

CAPACITY	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
1 PINT	5 1/4"	2 3/32	2 3/4	1 3/4	1 3/4	1/8	1/8	3/16	35°	8	9 3/8	1/2	5/64	1/8	7/8
1 QUART	6 3/8	2 3/32	3 1/8	2 1/16	2 1/4	3/16	1/8	3/16	35°	12	13 3/8	3/4	5/64	1/8	7/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.