RR-D-450C
September 8, 1972
SUPERSEDING
Fed. Spec. RR-D-450B
February 6, 1967

FEDERAL SPECIFICATION

DISHPANS, CORROSION-RESISTING STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.- This specification covers corrosion-resisting steel dishpans.

1.2 Classification.-

1.2.1 Sizes.- The dishpans shall be of the following sizes as specified (see 6.2):

1 - 12 quart
3 - 20 quart

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-S-766	-	Steel Plates, Sheets, and Strips - Corrosion Resisting
UU-P-268	-	Paper, Kraft, Untreated, Wrapping
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-L-10547 - Liners, Case, Waterproof

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Sanitation Foundation (NSF)

Standard No. 2 - Food Service Equipment

Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, NSF Building, Ann Arbor, Michigan 48105.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article.- When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2 and (6.3).

3.2 Standard product.- The dishpans covered by this specification shall be the manufacturer's standard commercial product except for any changes specified herein.

3.2.1 NSF compliance.- The dishpans shall conform to the applicable requirements of NSF Standard No. 2.

3.2.1.1 NSF certification.- The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the dishpans he proposes to furnish under this specification meet the applicable requirements of NSF Standard No. 2 as follows:

(1) Listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF Seal on the finished dishpans shall be submitted prior to the approval of the first article, if one is submitted, or prior to the approval of the first shipment, or

(2) A certification for the dishpans issued by NSF under their one-time contract evaluation/certification service shall be submitted prior to the approval of the first article, if one is submitted, or prior to the approval of the first shipment, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the dishpans are being procured, indicating that the dishpans have been tested and conform to NSF Standard No. 2 shall be submitted prior to approval of the first article, if one is submitted, or prior to commencing production.

3.3 Materials.- The materials shall conform to the applicable specifications and requirements specified hereinafter. Materials not definitely specified shall be of the quality normally used by the manufacturer for his commercial dishpan.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

3.3.1 Corrosion-resisting steel.-

3.3.1.1 Sheet.- Corrosion-resisting steel sheet shall be class 302 or 304 of QQ-S-766.

3.3.1.2 Tubing.- Corrosion-resisting steel tubing shall be of the same steel used to fabricate the dishpan body.

3.4 Design and construction.- The dishpans shall be designed and constructed as specified herein and on figure 1.

3.4.1 Body.- The dishpan body shall be formed from a single piece of corrosion-resisting steel specified in 3.3.1.1 and shall contain no seams. The bottom shall be indented.

3.4.2 Handles.- The handles for dishpans shall be loop type fabricated of corrosion-resisting steel tubing specified in 3.3.1.2. The configuration shall be as shown on figure 1. The loop handles shall be formed from a single piece of minimum 5/8-inch-outside-diameter (O.D.) tubing. The handle ends shall be flattened and the double thickness shall be not less than 0.055 inch thick at any point. Each flattened end of each handle shall be secured to the body by six 1/8-inch spot welds or fewer spots of equivalent total area down to a minimum of three or by welding all around the flattened ends. The dishpan shall support a load when lifted by the handles equivalent to four times the weight of the water capacity of the dishpan without visible signs of deformation, leakage, or other damage when tested as specified in 4.4.1.

3.4.3 Finish.- All surface imperfections, such as discoloration, pits, deep scratches, scale, rust, or other foreign matter shall be removed and the completed dishpans shall have a finish conforming to NSF Standard No. 2.

3.5 Marking for identification.- Each dishpan shall be marked for identification with the manufacturer's name or trademark of such known character easily identifiable with said manufacturer and applied in accordance with MIL-STD-130.

3.6 Workmanship.- The dishpans shall be clean, smooth, free from discoloration, pits, scale, rust, cracks, punctures, scratches, grind marks, die marks, burrs, slivers and sharp edges. The dishpans shall not be fractured, warped or malformed, and there shall be no evidence of fractures or punctures repaired by soldering. Welds shall be smooth, free of splatter and not undercut. Spot welds shall be sound with no visible evidence of surface burning.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When a first article is required, it shall be examined for defects in table I, dimensions specified, and tested in accordance with 4.4.1. The presence of any defects listed in table I, any dimension not within specified requirements, or failure to pass the test specified in 4.4.1 shall be cause for rejection of the first article.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item inspection.- The inspection lot shall consist of all dishpans of one size offered for inspection at one time. The sample unit shall be one completely fabricated dishpan.

4.3.2.1 Visual examination.- The completely fabricated dishpan shall be examined for the defects in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not clean and free of discoloration		X
	Pits, scale, rust, or other foreign matter	X	
	Not as specified	X	
Design, construction and workmanship (general)	Fractured, warped, malformed, or punctured	X	
	Fracture or puncture repaired by soldering	X	
	Burrs, slivers, projections, or sharp edges	X	
	Deep scratches	X	
	Surface scratch, grind marks, or die marks		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Body	Bottom not indented as specified	X	
	More than one piece construction or contains seams	X	
Handles	Missing	X	
	Not secured as specified		X
	Not single piece construction	X	
Marking	Missing, incomplete, or not legible		X
	Indented marking penetrates through metal, uneven, or distorted	X	
Welding (handle)	Cracked or fractured	X	
	Not smooth, splatter not removed, undercut or pitted	X	
	Not type specified	X	

4.3.2.2 Dimensional examination.- Examination shall be made of the dishpan to determine compliance with dimensional requirements. Any deviation shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in defects per hundred units.

4.3.2.3 Testing of the end product.- Testing of dishpans shall be performed on each inspection lot in accordance with 4.4.1. The inspection level shall be S-1 with an AQL of 4.0 expressed in defects per hundred units. Failure of the test in 4.4.1 shall constitute one defect.

4.3.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The inspection lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0 expressed in defects per hundred units.

4.3.3.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-601, examination for defects in closure and strapping shall be in accordance with PPP-B-601.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the currentversion before use.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Markings	Missing; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Component missing, damaged
Contents	Number per container is more or less than required

4.3.4 Standard compliance.- Proof of compliance with 3.2.1 shall be available to the Government representative.

4.4 Tests.-

4.4.1 Load test.- The dishpan shall be uniformly loaded with a weight equal to four times its rated water volume and lifted by the handles to a position so that both handles are parallel to and no less than 3 feet above floor line for a period of not less than one minute. This test shall be repeated ten times. The dishpan shall then be filled with water and examined to determine compliance with 3.4.2. Noncompliance with 3.4.2 shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.- Each dishpan shall be form-wrapped in two thicknesses of 30-pound kraft paper conforming to grade B of UU-P-268. The kraft paper shall be secured with 2-inch minimum width tape conforming to type III, grade B of PPP-T-45.

5.1.2 Level C.- Dishpans shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

5.2.1 Level A.- Dishpans of one size only, packaged as specified in 5.1, shall be packed in a snug-fitting cleated plywood shipping container conforming to overseas type of PPP-B-601. Unless otherwise specified, the quantity of dishpans per shipping container shall be twenty for size 1 and 3. When specified (see 6.2), the quantity per shipping container shall be 6 for all sizes. Each shipping container shall be provided with a type I or II, grade C case liner conforming to MIL-L-10547. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.2.2 Level B.- Dishpans of one size only, packaged as specified in 5.1, shall be packed in a snug-fitting cleated plywood container conforming to domestic type, style A or B, of PPP-B-601. Unless otherwise specified, the quantity of dishpans per shipping container shall be 20 for size 1 or 3. When specified (see 6.2), the quantity per shipping container shall be 6 for all sizes.

5.2.3 Level C.- Dishpans, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.

5.3 Marking.-

5.3.1 Civil agencies.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.


6. NOTES

6.1 Intended use.- The dishpans covered by this specification are intended for use in washing dishes.

6.2 Ordering data.- Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Size (see 1.2).
(c) Whether first article is required (see 3.1).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) If dishpans shall be packed six per container (see 5.2.1 and 5.2.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:10Z
Check the source to verify that this is the current version before use.

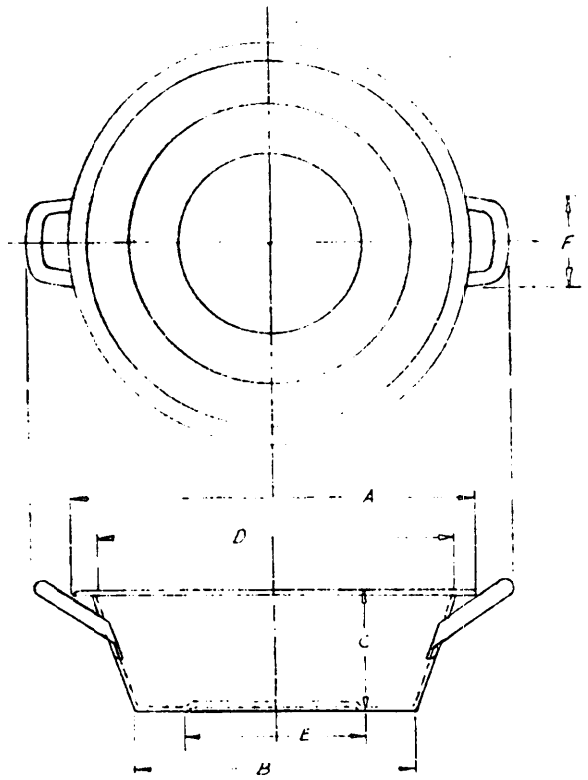

MINIMUM CAPACITY (QUARTS)	DIMENSIONS OF DISHPAN (INCHES)												METAL THICKNESS OF FINISHED DISHPAN MINIMUM
	A		B		C		D		E		F		
	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	
12	16 1/4	16 3/4	11 1/8	11 5/8	5 1/16	5 1/4	15	15 5/8	7 15/16	9 3/16	4 1/2	4 5/8	0.033
20	19 5/16	19 3/8	13 3/4	14	5 3/4	5 15/16	18 1/8	18 3/8	9 7/16	10 1/4	4 1/2	4 3/8	0.033

FIG 1 THIS FIGURE IS A MINIATURE COPY OF AN ARMY NATICK LABORATORIES DRAWING AND IS FOR INFORMATION ONLY; THE DRAWING REFERENCE IN PARAGRAPH 2.1 GOVERNS.

REV.	ZONE	DR	CK	CHANGED FROM	REV. DATE
D	B-217	R.H.	WN	DELETED 24 QT CAP ON CHART	24 MAY 72
		MET	MET	REV C APPROVED 2 JUNE 66	2 JUN 66
C	ME-4152	WM. O'S.	F F F	MINIMUM CAPACITY QUARTS DELETED 15, 36 & 94 QUARTS	24 NOV 1965
B	ME 2020	G.W.	C.J.B.	FRONT VIEW WAS PARTLY SECTIONED	13 SEPT 61
A		E.M.	LWB	MAX F DIM FOR 24 QT WAS 4 5/8 METAL THK FOR 20 & 24 QT WAS .039	2 AUG 1961

UNLESS OTHERWISE STATED; FABRICATING TOLERANCES ARE: DECIMALS ± ; WHOLE NUMBERS AND FRACTIONS ± ; DEGREES ±

HEADQUARTERS QUARTERMASTER RESEARCH & DEVELOPMENT COMMAND
QUARTERMASTER RESEARCH & DEVELOPMENT CENTER, U.S. ARMY
NATICK, MASSACHUSETTS

DISHPANS; CORROSION-RESISTING-STEEL

DRAWN	TRACED	CHECKED
Dalton		Buehler

CHIEF DRAFTSMAN

SCALE NONE (FOR REFERENCE ONLY)

APPROVED FOR THE Q. M. G.

SUPERSEDES DRAWING

SPEC. NO. RR-D-450

DWG. DATE 12 APR. 1955

SHEET 1 OF 1

DWG. NO. 2-9-147

SET OF DRAWINGS

RR-D-450C

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T12:10Z
Check the source to verify that this is the current version before use.

6.3 First article.- When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a First Article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 The size 4-24 quart dishpan has been deleted from this "C" revision of RR-D-450.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC

Preparing activity:

Army - GL

Civil Agency Coordinating Activities:

GSA - FSS
VA - DMS

Project No. 7330-0449

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Dishpans, Corrosion-Resisting Steel RR-D-450C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM JAN 66 [illegible] MAY BE USED.

Source: https://assist.dla.mil — Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

U.S.MAIL

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-LQ3
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:10Z
Check the source to verify that this is the current version before use.