RR-E-300B
August 6, 1969
SUPERSEDING
Fed. Spec. RR-E-300A
April 14, 1964

FEDERAL SPECIFICATION

EGG BEATERS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers two types of hand operated egg beaters.

1.2 Classification. Egg beaters shall be of the following types, as specified (see 6.2):

Type I - Die cast components. (Heavy-duty)
Type II - Stamped metal components. (Light-duty)

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specification and standard of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

Federal Specifications:

L-P-378 - Plastic Film (Polyethylene Thin Gage).
L-P-398 - Plastic Molding Material, Styrene-Butadiene.
QQ-B-626 - Brass, Leaded and Nonleaded; Rod, Shape, Forgings, and Flat Products with Finished Edges (Bar and Strip).
QQ-W-423 - Wire, Steel, Corrosion-Resisting.
QQ-W-461 - Wire, Steel, Carbon (Round, Bare and Coated).
QQ-Z-363 - Zinc-Base Alloy; Die Castings.
WW-T-791 - Tubing; Brass, Seamless.
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-E-20652 - Eyelet, Metallic and Washers.
MIL-P-20693 - Molding Plastic, Polyamide Nylon Rigid.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Loads, Skids, Runners, or Pallet Type Base.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T12:09Z
Check the source to verify that this is the current version before use.

American Society for Testing and Materials (ASTM) Standard:

A 167 - Corrosion Resisting Chromium-Nickel Steel, Plate, Sheet and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

National Classification Board:

National Motor Freight Classification.

(Application for copies should be addressed to the National Classification Board, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), before production is commenced, a sample egg beater shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Standard product. The egg beaters delivered under this specification shall be the manufacturer's commercial standard product, except for any changes necessary to comply with specification requirements.

3.2.1 Illustration. The illustration identified herein as figure 1 is for identification purposes only and is not intended to preclude the purchase of egg beaters otherwise conforming to this specification.

3.3 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for egg beaters provided the completed item complies with all provisions of this specification. Commercial tolerances are applicable to all metal thicknesses and diameters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.3.1 Die castings. Die castings shall be a zinc-base alloy conforming to alloy AG40A of QQ-Z-363.

3.3.2 Wire.

3.3.2.1 Carbon steel wire. Carbon steel wire shall conform to steel number 1010, finish 1 of QQ-W-461.

3.3.2.2 Corrosion-resisting steel wire. Corrosion-resisting steel wire shall conform to composition 302 or 304 of QQ-W-423.

3.3.3 Corrosion-resisting sheet steel. Corrosion-resisting steel sheet shall conform to type 302 or 304 of ASTM A 167.

3.3.4 Brass.

3.3.4.1 Seamless brass tube. Seamless brass tube shall conform to grade 2 of WW-T-791.

3.3.4.2 Brass rod and strip. Brass rod and strip shall conform to copper alloy 377 of QQ-B-626.

3.3.5 Eyelets. Eyelets shall conform to MIL-F-20652.

3.3.6 Nylon plastic. Nylon plastic shall conform to type I, uncolored or colored of MIL-P-20693.

3.3.7 Polystyrene plastic. Polystyrene plastic shall conform to type III, class 2 of L-P-398.

3.4 Construction.

3.4.1 Type I egg beater. The beater shall operate smoothly without gear or pinion crumbling, deformation, slipping, or binding and shall not become bent, warped, or distorted when tested as specified in 4.4.1.

3.4.1.1 Frame and handle. The frame shall be die cast from zinc-base alloy specified in 3.3.1. The frame shall be equipped with a handle which may be molded of the polystyrene plastic specified in 3.3.7. The handle shall be either of two-piece construction or an integral part of the frame die casting.

3.4.1.2 Drive gear. The gear shall be die cast from the zinc-base alloy specified in 3.3.1 and shall be approximately 3-1/8 inches in diameter.

3.4.1.3 Crank and knob. The crank shall be die cast from zinc-base alloy specified in 3.3.1 or carbon steel wire as specified in 3.3.2.1. The crank-pin shall be formed from corrosion-resisting steel wire specified in 3.3.2.2 or from carbon steel wire as specified in 3.3.2.1. The crank shall have a free-turning knob made of the plastic specified in 3.3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.4.1.4 Agitators. The egg beater shall be equipped with double agitators of four wings each. The wings shall be fabricated from the corrosion-resisting steel specified in 3.3.3. The wings may be ribbed for extra stiffness and the distance across opposite wings of the assembled agitators shall not exceed 3-3/4 inches and a minimum of 2-1/2 inches.

3.4.1.5 Center and guard wire assembly. The center and guard wire assembly shall be fabricated from the corrosion-resisting steel wire specified in 3.3.2.2. The wire shall be formed to securely mount the agitators vertically so that the wings of the rotating agitators will not touch or interfere with each other. The tops of the wire shall be secured in the beater frame and securely spot welded at the point where they cross at the bottom.

3.4.1.6 Bushings and buttons. The bushings and buttons shall be fabricated from the brass rod specified in 3.3.4.2 or of the nylon plastic specified in 3.3.6, or carbon steel.

3.4.1.7 Agitator stems. The agitator stems shall be fabricated of the brass tube specified in 3.3.4.1 and shall have a minimum outside diameter of 3/16 inch and wall thickness of 0.025 inch minimum.

3.4.1.8 Holding sleeves. The holding sleeves shall be fabricated of the corrosion-resisting steel specified in 3.3.3 or the brass specified in 3.3.4.2, or carbon steel.

3.4.1.9 Pinion gears. The pinion gears shall be fabricated of the nylon plastic specified in 3.3.6 and shall be securely mounted on the stems.

3.4.1.10 Eyelets. The eyelets shall be as specified in 3.3.5 and shall be installed so as to securely hold the wings together where they cross at the bottom of the agitator assembly. The eyelets shall be installed so as to provide bearings on the center wire.

3.4.1.11 Spot welds. Spot welds shall be sound, smooth, and free from pits and flashes.

3.4.1.12 Size. The overall length of the egg beater shall be not more than 13-1/2 inches and not less than 11-5/8 inches.

3.4.1.13 Finish. All zinc-base alloy die castings, carbon steel, and brass shall be chromium or nickel plated in accordance with the manufacturer's standard commercial practice.

3.4.2 Type II egg beater. The beater shall operate smoothly without gear or pinion deformation, slipping, or binding and shall not become bent, warped, or distorted when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:09Z
Check the source to verify that this is the current version before use.

3.4.2.1 Frame and handle. The frame shall be formed from either steel wire not less than 1/4 inch diameter or steel strip not less than .050 inch thick by 9/16 inch wide. Two bottom ends of the frame wire shall be attached and staked to a sheet steel stamping not less than 0.040 inch thick to complete the frame. The frame shall be equipped with a handle made of plastic specified in 3.3.7.

3.4.2.2 Drive gear. The drive gear shall be stamped from steel sheet not less than 0.040 inch thick and shall have an outside diameter of not less than 2-3/4 inches. The gear teeth shall consist of suitably shaped holes or lancings near the periphery of the gear with an enclosing rim of metal at the periphery. The gear shall be provided with a hub securely attached to the gear so as to provide alignment of the gear in the frame.

3.4.2.3 Crank and knob. The crank shall be formed from steel wire not less than 3/16 inch diameter. The minimum length of the crank arm shall be 1-5/8 inches. The crank shall be equipped with a free-turning knob made of plastic specified in 3.3.7.

3.4.2.4 Agitators. The egg beater shall be equipped with double agitators of four wings each. The wings shall be fabricated from corrosion-resisting steel as specified in 3.3.3 not less than 0.025 inch thick. The distance across opposite wings of the assembled agitators shall not exceed 3-3/4 inches and minimum of 2-1/2 inches.

3.4.2.5 Agitator support. The agitator support shall be formed from carbon steel or type 302 or 304 corrosion-resisting steel wire not less than 1/16 inch diameter. The two top ends of the support wire shall be secured in the beater frame. When a guard (optional) is used for additional stiffness, it shall be formed from corrosion-resisting steel specified in 3.3.3 and riveted to the frame shield at its upper end and pinned to the agitator support at the point of crossing at the bottom. The agitator support shall securely mount the agitators vertically so that the agitators rotate freely without the wings of the rotating agitator touching or interfering with each other.

3.4.2.6 Crankshaft bearings. The crankshaft bearings shall be brass or steel bushings, or extrusions from the frame material or ball bearing cups inserted and secured in the beater frame so as not to turn with the crankshaft.

3.4.2.7 Pinion gears. The pinion gears shall be flat stampings of sheet steel or molded nylon not less than 1/16 inch thick and not less than 11/16 inch outside diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.4.2.8 Eyelets. Eyelets shall be made of brass. Eyelets shall be installed so as to securely hold the upper ends of the agitator wings together and to secure the pinion gears to the agitators. These eyelets shall serve as the upper agitator bearings on the support wire. Other eyelets shall be installed so as to securely hold the agitator wings together where they cross at the bottom of the agitator assembly. These eyelets shall serve as the lower agitator bearings on the agitator support wire.

3.4.2.9 Finish. The surfaces of all ferrous parts shall be nickel or chromium plated.

3.5 Marking. The egg beaters shall be marked with the manufacturer's name, trade name, or trademark of such known character easily identifiable with said manufacturer, applied in accordance with MIL-STD-130.

3.6 Workmanship. The parts of the egg beater shall not be cracked or fractured. The gear and pinions shall be correctly meshed and shall have no missing teeth. The egg beater shall be free from sharp edges, projections which may cause injury to user, flaws, cracks, indentations on tubing, or malformed parts that affect functioning. Die cast parts shall be free of porosity, blowholes and cavities. All surfaces shall be smooth and free of dirt, oil, grease and other foreign matter, rough grind, die, and trimming marks, pits, scale, peel, chips, and blisters.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required it shall be examined for defects listed in table I, dimensions specified, and tested as specified in 4.4.1. Failure to pass the test in 4.4.1 shall be cause for rejection of the preproduction sample. The presence of any defects listed in table I or any dimension not within specified requirements shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:09Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection. In accordance with 4.1 components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item inspection. The lot shall consist of all egg beaters of one type offered for inspection at one time. The sample unit shall be one completely fabricated egg beater.

4.3.2.1 Visual examination. Examination shall be made of the egg beater for defects listed in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defects	Classification Major	Minor
Finish			
Zinc-base alloy die casting, carbon steel, and brass parts	Not chromium or nickel plated as specified.	X	
	Blister, pits, chipped, or peeling.	X	
Workmanship and construction	Any component part omitted, cracked, or fractured.	X	
	One or more teeth cracked or missing from drive gear or pinion gears.	X	
	Sharp edge projection on any part (which may cause injury to user).	X	
	Any flaws, cracks, or indentations on tube.	X	
	Any malformed parts (affecting function).	X	
	Gear and pinions do not mesh freely (bind).	X	
	Porosity, blowholes or cavities in die cast parts. (Type I)	X	
	Dirt, oil, grease, or other foreign matter.	X	
	Not smooth on all surfaces (i.e., rough grind, die, or trimming marks, pits, or scale).		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defects	Classification Major	Minor
Frame	Not equipped at upper end with handle as specified.	X	
Handle	Loose.		X
	Molding flash not removed (plastic handle).		X
Crank	Not securely attached to gear.	X	
	Any binding (does not rotate freely).		X
	Crankshaft bearing for type II not as specified.		X
Knob	Does not rotate freely around crank (binds).		X
	Not securely mounted (can be detached or removed).		X
	Not plastic.	X	
	Molding flash not removed.		X
Buttons	Loose.	X	
	Wrong type (not a button design).	X	
Guard and center wire (type I)	Loose (top ends not securely staked on inner side of each arm on frame).	X	
	Not securely spot welded at point where center and guard wires cross at bottom.	X	
	Spot weld burnt through.	X	
	Distortion or structural strains caused by spot welding (affecting function).	X	
	Spot weld not centered on assembly.		X
	Spot weld splatter, pits, or flashes.		X
Wings	Not mounted vertically in proper relation to each other for free meshing.	X	
	Not required number (8).	X	
	Eyelet not clinched or split.		X
	Burrs or fins on eyelet.		X
	Eyelet missing.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defects	Classification Major	Minor
Holding sleeves	Loose (can be pried or removed from bushings and wings).		X
Marking for identification	Any penetration or unevenness (affecting function).	X	
	Omitted, incomplete, illegible.		X

4.3.2.2 Dimensional examination. Examination shall be of the completed egg beater to determine compliance with dimensional requirements. Any dimension not within the specified requirements shall constitute a defect. The inspection level shall be S-4 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.3.2.3 Testing of the end item. Testing shall be performed on egg beaters as specified in 4.4.1. The inspection level shall be S-4 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examination	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective affecting serviceability. Components not as specified.
Content (exterior and interior)	Number per container is more or less than specified.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:09Z
Check the source to verify that this is the currentversion before use.

4.3.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing and strapping shall be in accordance with PPP-B-636.

4.3.4 Examination of palletization. An examination shall be made to detemine that palletization is in compliance with 5.3. Defects shall be scored as specified in table III. The sample unit for this examination shall be one palletized unit load, ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5, expressed in terms of defects per hundred units.

TABLE III. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limit.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.4 Tests.

4.4.1 Operational test. The egg beater shall be placed in a mixing vessel containing one quart of SAE 250 Hypoid oil or other liquid having an equal viscosity so as to completely cover beater wings of the type II egg beater. For the type I egg beater the oil or liquid shall cover the holding sleeves. The beater shall be firmly gripped and the crank rotated 100 times in a period of not more than one minute. During and after the test, the egg beaters shall be observed for compliance with operation and strength requirements of 3.4.1 and 3.4.2 as applicable. Inability of the egg beaters to meet requirements shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the currentversion before use.

5.1.1 Level A.

5.1.1.1 Unit packaging. Each egg beater shall be placed in an end opening polyethylene bag. The polyethylene flexible film shall be 0.002 inch thick conforming to type I, grade C, finish 1 of L-P-378. All seams and closures shall be effected by heat sealing and shall conform to the heat seal strength requirements of L-P-378. Prior to, or during the final heat sealing closure operation, excess air within the bag shall be expelled.

5.1.1.1.1 Intermediate packaging. Ten egg beaters, unit packaged as specified in 5.1.1, shall be packaged in the most compact manner in a snug fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 200 of PPP-B-636. Box closure shall be in accordance with the appendix of PPP-B-636.

5.1.2 Level C. The egg beaters shall be packaged to afford adequate protection against damage from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Sixty egg beaters, packaged as specified in 5.1, shall be packed in a snug fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Sixty egg beaters, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be V3c or V3s, fabricated and closed in accordance with PPP-B-636. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C. Egg beaters, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

5.3 Palletization (Military agencies). Unless otherwise specified (see 6.2), egg beaters packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The egg beaters covered by this specification are intended for use in kitchens, galleys, and bakeries for mixing, beating, and whipping various ingredients required in the preparation of foods. The type I egg beater is for military users and the type II egg beater is for civil agency users.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) First article. When a preproduction sample is required (see 3.1).
(d) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(f) When palletization is not required (see 5.3).

6.3 Level B packaging. When level B packaging is specified for civil agency procurement, the requirements of 5.1.1 level A packaging shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - SA
Air Force - 84

User activities:

Navy - CG, MC

Preparing activity:

Army - GL

Project No. 7330-184

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

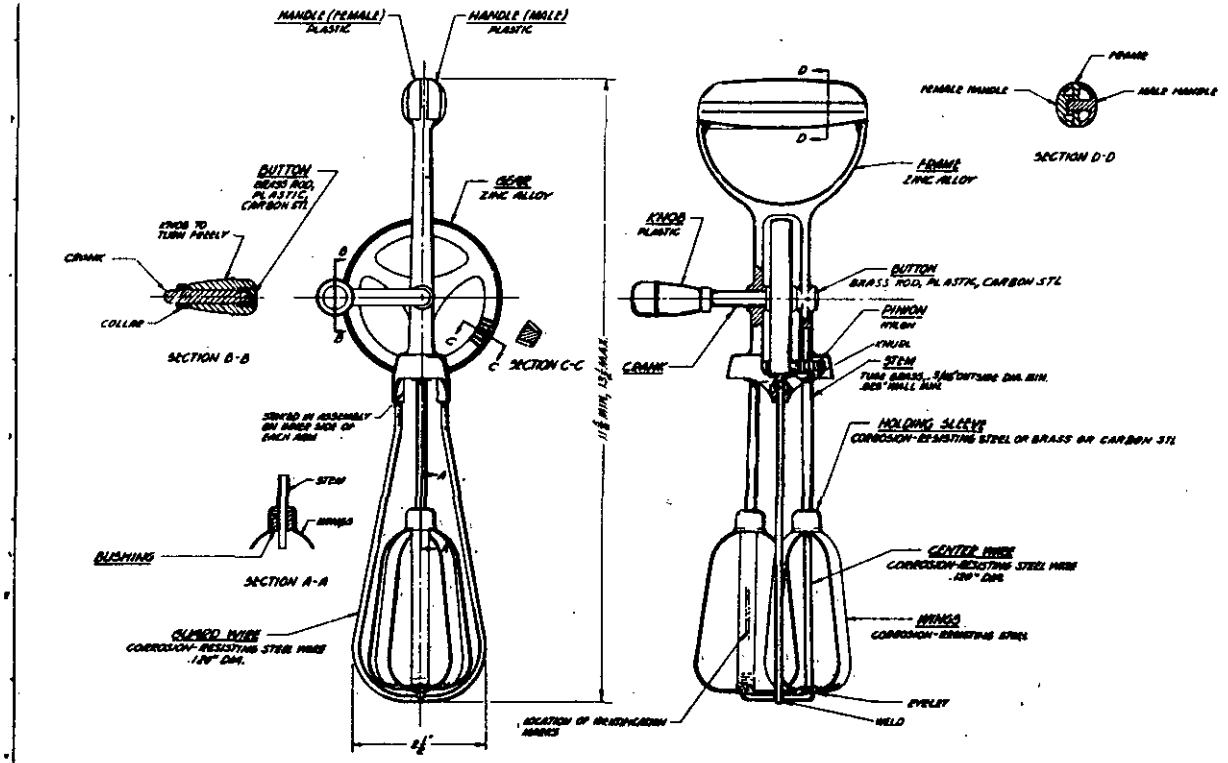


FIGURE- 1

EGG BEATER

RR-E-300B.

15

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. *Comments and the return of this form* will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
RR-E-300B Egg Beaters

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:09Z
Check the source to verify that this is the current version before use.