RR-K-260C
December 27, 1973
SUPERSEDING
Fed. Spec. RR-K-260B
February 7, 1972

FEDERAL SPECIFICATION

KITCHEN AND FOOD SERVING UTENSILS (ALUMINUM)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for aluminum kitchen and food serving utensils used in bakeshops and kitchens.

1.2 Classification.

1.2.1 Types, styles, and sizes. The kitchen and food serving utensils covered by this specification shall be of the following types, styles, and sizes as specified (see 6.2 and 6.3).

Type II	-	Colanders, kitchen, institutional, (figure 2).
Size 1	-	11-quart
Size 2	-	16-quart
Type III	-	Dippers, kitchen, institutional, (figure 3).
Size 1	-	30-ounce
Size 2	-	64-ounce
Type IV	-	Measures, liquid.
Style A	-	Baker's, flanged lip (figure 4).
Size 3	-	2-quart
Size 4	-	4-quart
Type V	-	Poacher, egg, 4-cup (figure 6).

FSC 7240
7330
7350

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

Type VI - Scoop, kitchen, (figure 7).

Type VII - Sieve, flour, bakers' (figure 8).

Type VIII - Salt and pepper shakers (figure 9).

Style A - Salt shaker.
Style B - Pepper shaker.

Type IX - Strainer, china cap, 10-inch diameter (figure 10).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-A-200/GEN - (General Specification) Aluminum Alloy Bar, Rod, Shapes, Structural Shapes, Tube, and Wire, Extruded.
QQ-A-200/1 - Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded, 3003.
QQ-A-225/GEN - (General Specification) Aluminum and Aluminum Alloy Bar, Rod, Wire, or Special Shapes; Rolled, Drawn, or Cold Finished.
QQ-A-225/2 - Aluminum Alloy Bar, Rod and Wire; Rolled, Drawn or Cold Finished, 3003.
QQ-A-225/8 - Aluminum Alloy Bar, Rod, Wire and Special Shapes; Rolled, Drawn, or Cold Finished, 6061.
QQ-A-250/GEN - (General Specification) Aluminum and Aluminum Alloy Plate and Sheet.
QQ-A-250/1 - Aluminum 1100, Plate and Sheet.
QQ-A-250/2 - Aluminum Alloy 3003, Plate and Sheet.
QQ-A-250/8 - Aluminum Alloy 5052, Plate and Sheet.
QQ-A-596 - Aluminum Alloy Permanent and Semi-Permanent Mold Castings.
QQ-A-601 - Aluminum Alloy Sand Castings.
QQ-W-423 - Wire, Steel, Corrosion-Resisting.
WW-T-700/GEN - (General Specification) Tube, Aluminum and Aluminum Alloy, Drawn, Seamless.
WW-T-700/2 - Tube, Aluminum Alloy, Drawn, Seamless, 3003.
WW-T-700/6 - Tube, Aluminum Alloy, Drawn, Seamless, 6061.
PPP-A-1182 - Aluminumware, Bakeshop and Kitchen, Packaging, Packing and Marking of.
PPP-B-636 - Boxes, Shipping, Fiberboard.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Test Method Std. No. 151/GEN - (General Provisions) Metals; Test Method.
Fed. Test Method 151/111 - Chemical Analysis.
Fed. Test Method 151/112 - Spectrochemical Analysis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers, at the General Services Administration Regional Offices in Boston, New York, Washington, DC. Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-147	-	Palletized and Containerized Unit Loads, 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

(Copies of Military Specification and Standards required by suppliers in conncection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Sanitation Foundation (NSF):

Standard No. 2 - Food Service Equipment.
Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, NSF Building, Ann Arbor, MI 48105.)

American Society for Testing and Materials (ASTM) Standard

B 209 - Aluminum Alloy Sheet and Plate.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specification and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard product. The aluminumware delivered under this specification shall be the manufacturer's commercial product, except for any changes necessary to comply with specification requirements.

3.2 Codes and standards. The type IV (size 3, 4), type VI and type IX, aluminumware shall conform to the applicable requirements of NSF Standard No. 2.

3.2.1 Compliance. Prior to commencing production the supplier shall submit to the contracting officer or his authorized representative satisfactory evidence that the type IV (size 3, 4), type VI and type IX aluminumware he proposes to furnish under this specification meet the applicable requirements of NSF Standard No. 2 as follows:

3.2.1.1 NSF. Acceptable evidence of meeting the requirements of NSF Standard No. 2 shall be:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished aluminumware, or

(2) A certification for the aluminumware issued by NSF under their special one-time contract evaluation/certification service, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the aluminumware is being procured, indicating that the aluminumware has been tested and conforms to NSF Standard No. 2.

3.3 Materials. Materials and components shall be as specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial aluminumware, provided the completed items comply with all provisions of this specification. Commercial tolerances are applicable to all material thicknesses and diameters.

3.3.1 Plate and sheet, aluminum.

3.3.1.1 Alloy 1100. Aluminum alloy 1100 shall conform to QQ-A-250/1.

3.3.1.2 Alloy 3003. Aluminum alloy 3003 shall conform to QQ-A-250/2.

3.3.1.3 Alloy 3004. Aluminum alloy 3004 shall conform to ASTM B 209.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.3.1.4 Alloy 5052. Aluminum alloy 5052 shall conform to QQ-A-250/8.

3.3.1.5 Alloy 3003 clad with aluminum alloy 3002. Aluminum alloy 3003 shall be 10 percent clad both sides with aluminum alloy 3002. Aluminum alloy 3003 shall be as specified in 3.3.1.2. Aluminum alloy 3002, shall conform to the following chemical composition:

Silicon	0.08 max.
Iron	0.10 max.
Copper	0.15 max.
Manganese	0.10-0.25
Magnesium	0.05-0.20
Zinc	0.03 max.
Titanium	0.03 max.
Other, each	0.03 max.
Others, total	0.10
Aluminum	Remainder

3.3.2 Bar, rod, shapes, and wire, aluminum.

3.3.2.1 Alloy 3003. Aluminum alloy 3003, rolled or drawn, shall conform to QQ-A-225/2.

3.3.2.2 Alloy 6061. Aluminum alloy 6061, rolled or drawn, shall conform to QQ-A-225/8.

3.3.2.3 Alloy 3003, extruded. Aluminum alloy 3003 extrusions shall conform to QQ-A-200/1.

3.3.3 Tube, aluminum.

3.3.3.1 Alloy 3003. Aluminum alloy 3003 tube shall conform to WW-T-700/2.

3.3.3.2 Alloy 6061. Aluminum alloy 6061-T6 tube shall conform to WW-T-700/6.

3.3.4 Castings. Castings shall be aluminum alloy sand castings conforming to QQ-A-601 or aluminum alloy permanent or semi-permanent mold castings conforming to QQ-A-596.

3.3.5 Corrosion-resisting steel wire. Corrosion-resisting steel wire shall conform to composition 302, 304, or 430 of QQ-W-423.

3.4 Construction and design. Figures shown for the aluminumware are illustrative only, and are not intended to preclude any commercial design otherwise conforming to specification requirements.

3.4.1 Metal thickness. All metal thickness and wire diameter dimensions specified hereinafter shall mean thickness or wire diameter after fabrication. A 5 percent minus tolerance is allowable, and material having metal thicknesses

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

and wire diameters greater than specified herein is acceptable. Thickness dimensions specified hereinafter shall be the sidewall or bottom thickness of the aluminumware and not the bead thickness or the thickness of the curved section where the sidewall meets the bottom.

3.4.2 Handles. All handles shall be formed to a shape or contour to provide a good handgrip and unless otherwise specified herein, shall be either riveted or welded to the utensil. There shall be no failure of rivets or welds or permanent deformation of the handles when the utensil is tested as specified in 4.4.1.

3.4.3 Capacities. Unless otherwise specified herein, the capacities specified shall have a minus tolerance of 5 percent and a plus tolerance of 10 percent.

3.4.4 Rivets. The rivets used shall be brazier (low profile) head rivets with smooth rounded heads on both sides, and shall have no splits.

3.5 Finish. Aluminumware shall be smooth on all surfaces and edges and shall be free from corrosion, discoloration, or stain. The finish shall conform to NSF Standard No. 2. In addition, type IV and type VIII shall have an anodized finish. The anodized finish shall be a film of aluminum oxide, produced by electrolytic means so that it is integral with the metals.

3.6 Marking. The aluminumware shall be marked in a plain and permanent manner with the manufacturer's name, trade name, or trademark of such known character that the source of manufacture may be determined. Capacities shall be legibly and permanently marked on each type II, type III, and type IV utensil.

3.7 Detail requirements.

3.7.1 Type II, colander. The institutional type colander shall be 11-quart capacity for size 1 and 16-quart capacity for size 2 (see figure 2).

3.7.1.1 Body. The body of the colanders shall be hemispherical in shape and formed seamless from a single piece of aluminum alloy specified in 3.3.1.2 or 3.3.1.3. The top and bottom of the body shall be 0.102-inch thick, and the sidewall thickness may decrease to 0.081-inch. The body shall be attached to the base with not less than eight equally spaced spot welds or four aluminum rivets. There shall be not less than five perforations per square inch in the perforated area.

3.7.1.2 Base. The base shall be 0.102-inch thick and shall be formed seamles from a single piece of aluminum alloy specified in 3.3.1.2 or 3.3.1.3.

3.7.1.3 Loop handles. Each colander shall be fitted with two loop handles located diametrically opposite each other and attached by two aluminum rivets

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

in each palm, or two spot welds if aluminum handles are used. The handles shall be 0.036-inch diameter tinned steel or 0.3249-inch diameter aluminum.

3.7.2 Type III, dippers. The institutional dippers shall be of 30- or 64-ounce capacity as specified (see figure 3).

3.7.2.1 Body. The body of both size dippers shall be formed seamless from a single piece of aluminum alloy specified in 3.3.1.2, 3.3.1.3, or 3.3.1.4. The body shall be 0.081-inch thick for the 30-ounce dipper, and 0.057-inch thick for the 64-ounce dipper. The top edge shall be finished with a half-round open bead, a closed bead, or finished smooth without a bead.

3.7.2.2 Handle. The dippers shall have a one piece tubular handle, 0.065-inch thick wall, made of aluminum alloy specified in 3.3.3.1 or 3.3.3.2. The handle shall be attached to the body by gas or arc welding. The handle shall have a 1-1/4 inch outside diameter and shall be 6-1/2 inches long, plus or minus 1/8-inch. There shall be no openings in the handle and both ends shall be closed and sealed.

3.7.3 Type IV, measures, liquid.

3.7.3.1 Style A, baker's, flanged lip. The baker's measures shall be 2, or 4-quart capacity as specified (see figure 4).

3.7.3.1.1 Body. The body shall be formed seamless from a single piece of aluminum alloy specified in 3.3.1.2 or 3.3.1.5. The body shall have a thickness of 0.045-inch for the 2-quart measure; and 0.051-inch for the 4-quart measure. The sidewalls shall be straight. The body of the measure shall have three continuous grooves rolled inward or outward and spaced in such a manner that the measure is marked in four equal divisions. The top edge of the measure shall be flanged outward to form a pouring lip.

3.7.3.1.2 Handle. Each measure shall be fitted with a strap handle formed from a single piece of flattened aluminum alloy sheet specified in 3.3.1.5, 3.3.1.2 or 3.3.1.3. The 2- and 4-quart handles shall be 0.102-inch thick by 1-inch wide. The handle shall be located on the measure at a point diametrically opposite the high point of the pouring lip.

3.7.4 Type V, poacher, egg, 4-cup. The pan shall be of 1-1/2 or 2-quart capacity (see figure 6).

3.7.4.1 Pan. The pan shall be 0.032-inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.3.1.2.

3.7.4.2 Egg rack and cups. The egg rack and cups shall be 0.025-inch thick and shall be formed from aluminum alloy specified in 3.3.1.2. The rack shall be removable from the pan. The egg cups shall be removable from the rack.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

3.7.4.3 Handle. The pan shall be fitted with a long handle formed from either 0.050-inch thick corrosion-resisting steel specified in 3.3.5 or black phenolic plastic. The metal handle shall be attached to the pan by spot welding or riveting. The plastic handle shall be attached by corrosion-resistant machine screws.

3.7.4.4 Cover. The cover shall be 0.032-inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.3.1.2 or 3.3.1.4. The cover shall be approximately 0.093-inch smaller in diameter than the pan. The top edge shall be finished smooth and shall not be beaded. The cover shall be fitted with either an aluminum handle or a black phenolic plastic knob or handle. The aluminum handle shall be formed from a single piece of aluminum specified in 3.3.2.1 and shall be 0.064-inch thick. The handle shall be not less than 5/8-inch wide and shall be attached to the cover by spot welding or riveting. The black phenolic handle or knob shall be attached by corrosion-resistant machine screws.

3.7.5 Type VI, scoop, kitchen (see figure 7).

3.7.5.1 Body. The body shall be cast aluminum alloy specified in 3.3.4, the handle being cast integral with the body. The body shall be 8-1/2 inches long by 5 inches wide with an overall length of 12-3/8 inches. The dimensions for the body shall be plus or minus 1/8-inch.

3.7.6 Type VII, sieve, flour, bakers'. The flour sieve shall have a top inside diameter of 16 inches, plus or minus 1/8-inch. The inside depth shall be 3-1/2 inches plus or minus 1/8-inch (see figure 8).

3.7.6.1 Body. The body shall be 0.064-inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.3.1.2, 3.3.1.3 or 3.3.1.4. The body shall have vertical sides with rolled grooves. The bottom shall be blanked out and shall be covered with 14-mesh screen cloth. The screen cloth shall be made from 0.018-inch diameter corrosion-resisting steel wire specified in 3.3.5 or aluminum screen cloth extending up the sides of the sieve and locked in place by a clamping band. If aluminum screen cloth is used it shall be protected by a heavier reinforcing screen. The band shall be formed from a single piece of aluminum alloy extruded section, specified in 3.3.2.3. The band shall extend 3/8-inch below the bottom of the sieve.

3.7.7 Type VIII, salt and pepper shakers.

3.7.7.1 Style A, salt shaker and style B, pepper shaker. The body and cap of the shakers shall be 0.032-inch thick and shall be formed seamless from a single piece of aluminum alloy specified in 3.3.1.1, or 3.3.1.2. The shakers shall have a maximum diameter of 3 inches, a maximum height of 4 inches, and a minimum capacity of 9 cubic inches (see figure 9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3.7.7.2 Cap. Threaded caps shall be furnished which shall screw onto the body of both style shakers. Holes in the cap shall be in accordance with the manufacturer's standard practice except that the holes for the style A shaker shall be visibly larger than those for the style B shaker.

3.7.8 Type IX, strainer, china cap. The china cap strainer shall have a nominal inside diameter of 10 inches at the top and shall have a capacity of 5-1/2 quarts when filled to the brim (see figure 10).

3.7.8.1 Body. The strainer body shall be formed seamless from a single piece of aluminum alloy specified in 3.3.1.2.

3.7.8.2 Handle. The strainer shall be fitted with a long cast-aluminum handle provided with a hang-up hole. The handle shall have a projecting hook to engage the top edge of the pot used with the strainer.

3.7.8.3 Roller. When specified (see 6.2), a roller made from aluminum alloy, styrene, modified rubber, or a similar impervious material shall be furnished with each strainer. The roller shall be coneshaped and shall be rounded at the small end to match the radius at the bottom of the strainer.

3.8 Workmanship. All sharp edges, slivers, and burrs shall be removed. All deep scratches, pits, and tool marks on interior and exterior surfaces shall be removed. Welding shall be complete, free from burnholes, cracks, fractures, slag inclusion, and undercuts. Welds shall be correctly fused, smooth, and uniform, with scale or flux deposits removed. Rivets shall not be missing, broken, fractured or loose.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.1.1 Chemical analysis. Aluminum alloy 3002 specified in 3.3.1.5 shall be tested for chemical analysis in accordance with the procedure outlined in Method 111 or 112 of Fed. Std. No. 151. Failure to meet specified requirements shall be cause for rejection of the lot. The lot shall be the amount of metal offered for inspection at one time.

4.2.2 End item inspection. The inspection lot shall be all aluminumware of one type, style, and size offered for inspection at one time.

4.2.2.1 Visual examination. The aluminumware shall be examined for the defects in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not finished as specified	X	
	Area of corrosion	X	
	Stained or discolored		X
Construction and workmanship (general)	Any part missing, or not specified type	X	
	Any component fractured, split, buckled, bent, punctured, or malformed	X	
	Operation omitted or not properly performed	X	
	Deep scratch or tool mark on interior surface clearly noticeable	X	
	Scratched, pitted, or tool mark on exterior surfaces	X	
	Any sharp edge, sliver, or burr	X	
	Functioning component inoperative or will not function as intended	X	
Handle	Not attached as specified	X	
	Not formed for handgrip	X	
Welding (where required)	Not type specified	X	
	Missing, incomplete, burnholes, cracked, fractured, or not fused	X	
	Slag inclusion, undercut, not smooth and uniform, scale or flux deposits not removed	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Rivets (where required)	Missing, broken, fractured, or loose	X	
	Not type specified	X	
Beading (where required)	Not as specified	X	
	Not even	X	
Standard product	Item not in accordance with manufacturers standard product except for changes necessary to comply with specification requirement	X	
Screws (where required)	Missing, broken, stripped, or fractured	X	
	Not drawn up tight	X	
Marking for identification	Missing, incomplete, incorrect, not legible		X

4.2.2.2 Dimensional examination. The aluminumware shall be examined for compliance with dimensions specified. Any dimension not within the specified tolerance shall be a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.2.2.3 End item testing. The first produced aluminumware utensils, equipped with handles, shall be tested as specified in 4.4.1. The first produced aluminumware utensils shall be tested as specified in 4.4.2, if applicable. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units. Failure of test shall be cause for rejection of the first produced item or the inspection lot, as applicable.

4.2.3 Examination of preparation for delivery. An examination shall be made to determine that preparation for delivery as specified in section 5 of this specification is in conformance with PPP-A-1182.

4.2.3.1 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be as indicated in table II. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

4.3 Code and standards compliance. Proof of compliance with the requirements of NSF, as specified in 3.2, shall be available to the Government representative.

4.4 Tests.

4.4.1 Handle test. The utensil shall be loaded with weights equivalent to 1-1/4 times the weight of the water capacity of the utensil and lifted by the handle(s). The handle(s) shall be examined to determine compliance with 3.4.2. Any noncompliance with the handle requirements specified shall constitute failure of this test.

4.4.2 Capacity. The type II through V and type VIII and IX items shall be filled to capacity with water and the volume of the water measured to determine compliance with 3.4.3. The insides of the type II and IX utensils should be lined with polyethylene film or similar material to cover perforations and allow utensils to hold water. Inability to meet the capacity requirements specified shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Levels A, B, and C. Packaging and packing for each level of protection shall be in accordance with the applicable requirements of PPP-A-1182 (see 6.2) except that for level A packing the fiberboard shipping container shall be V2s of PPP-B-636.

5.2 Palletization. Unless otherwise specified (see 6.2), aluminumware packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to markings required by the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bakeshop and kitchen aluminumware is intended for domestic and institutional use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, style, and size of aluminumware required (see 1.2).
(c) When a roller is required with a china cap strainer (see 3.7.8.3).
(d) Selection of applicable levels of packaging and packing (see 5.1).
(e) When palletization is not required (see 5.2).

6.3 Deletion data. Type I, sizes 1 and 3 food mixing bowls; and type IV, style A, sizes 1, 2 and type IV, style B measures have been deleted from this specification.

6.4 Contract data requirements. Any data items to be delivered under any contract for items covered by this specification should be specifically called for in the contract in accordance with the applicable regulations of the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.




FIGURE 4.



FIGURE 3.




FIGURE 2.



FIGURE 7.

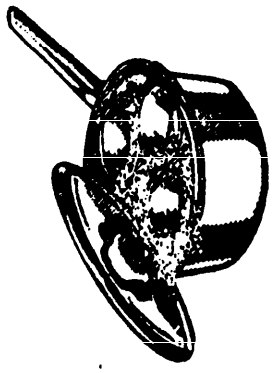


FIGURE 6.




FIGURE 10.



FIGURE 9.

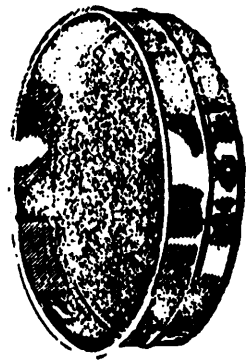


FIGURE 8.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MC, MS

User activity:

Navy - CG

Preparing activity:

Army - GL

Civil Agency Coordinating Activities:

GSA - FSS
HEW - NIH
VA - DMS

Project No. 7330-0466

Orders for this publication are to be placed with General Services Administration, acting as an agent for the superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

Kitchen and Food Serving Utensils (Aluminum) RR-K-260C

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MASS. 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNLT-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.