RR-L-112c
December 15, 1967
SUPERSEDING
Fed. Spec. RR-L-112b
October 24, 1960

FEDERAL SPECIFICATION

LANTERNS, KEROSENE, HAND, GLOBE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers kerosene-burning, hand lanterns with or without glass globes, and also provides for the procuring of glass globes separately (see 6.2).

1.2 Classification.

1.2.1 Types and classes. The lanterns and globes (when purchased separately), shall be of the following types and classes as specified (see 6.2 and 6.3).

Type I - Cold blast, tubular frame.
  Class A - Large size, medium globe (style F), 32-ounce capacity, 7/8 inch wick, 45 hours burning time.
  Class B - Small size, short globe (style B), 16-ounce capacity, 5/8 inch wick, 30 hours burning time.

Type IV - Wire-frame, short globe (style C or D), 3/8-pint capacity, 5/8-inch wick, 20 hours burning time.

Globe styles:
  Style B (see fig.1).
  Style C (see fig.2).
  Style D (see fig.3).
  Style F (see fig.4).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-T-191 - Terne Sheet (Long and Short Ternes).
QQ-T-425 - Tinplate (Hot Dip and Electrolytic).

FSC 6260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

QQ-W-461 - Wire, Steel, Carbon, (Round, Bare and Coated).
QQ-Z-325 - Zinc Coating, Electrodeposited, Requirements for.
VV-K-211 - Kerosene.
PPP-B-636 - Box, Fiberboard.
PPP-C-843 - Cushioning Material, Cellulosic.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Specifications and Standards required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, a sample lantern covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product. It is intended that the lanterns covered by this specification shall be standard commercial products of the manufacturer except for changes necessary to conform to the requirements specified herein.

3.3 Materials. Materials shall conform to the requirements specified herein. Materials not definitely specified shall be of the quality used in current industry practice.

3.3.1 Steel, carbon.

3.3.1.1 Uncoated and coated sheet or strip. Uncoated sheet or strip shall be either bright or black. Coated sheet steel shall be zinc-coated, tinplated, or short terne coated. The thickness of the sheet, before any coating or finish is applied, shall be not less than 0.0121 inch to a maximum of 0.0149-inch. The coating shall be tightly adherent and shall thoroughly and evenly cover the base sheet.

3.3.1.1.1 Zinc-coating. Zinc-coating of each surface shall conform to the requirements of type II, class 2 of QQ-Z-325.

3.3.1.1.2 Terne sheets, short. Short terne sheets shall conform to class 2, type I, 8 pounds (nominal 8 pounds per double base box), grade A of QQ-T-191.

3.3.1.1.3 Tinplate sheets. The tinplate sheets shall conform to type I, grade 4, electrolytic class 25, dull-matte finish of QQ-T-425.

3.3.1.2 Wire, steel. The round steel wire shall conform to steel numbers 1010 or 1015, finish 5, any temper, class 2 coating of QQ-W-461.

3.3.2 Globes, glass. The globes shall be glass of the borosilicate type, or commercial lime quality glass in accordance with the manufacturer's current commercial practice. The globe colors shall be solid blue, green, ruby, yellow, or clear as specified (see 6.2).

3.3.3 Wick. The wick shall be commercial grade cotton woven material of the sizes specified herein.

3.4 Design and construction (general). Design and construction shall be as specified herein in accordance with the applicable types, classes, and materials required, and the dimensions shown in tables I and II, and on the applicable figures (see 1.2 and figures 1 thru 7).

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:08Z
Check the source to verify that this is the currentversion before use.

3.4.1 Design.

3.4.1.1 Leakage. The completely assembled lantern shall be oiltight when tested as specified in 4.5.1.1. The burner and the filler hole (when furnished) shall show no leakage when tested as specified in 4.5.1.2.

3.4.1.2 Fount. When the lantern is placed on a horizontal plane surface, the bottom of the fount shall not contact the plane except around the rim, and the lantern shall not rock more than 1/16 inch nor lean more than 5°.

3.4.1.3 Burner. The burner shall be a detachable unit. The base shall snugly fit the receiving collar on the fount. The burner shall have a wick spindle having two or three securely fastened toothed wheels. The wick-raiser spindle shall be for raising and lowering the wick from the outside of the lantern. The burner shall be mechanically locked into the fount by means of a bayonet-type lock mechanism formed by the wick-raiser spindle and fount, or by a wing-type locking device within the burner assembly.

3.4.1.4 Illuminant. The burner shall be designed to use kerosene as the illuminant. The kerosene shall comply with the requirements of VV-K-211. The burner shall maintain a steady, smokeless flame and there shall not be any soot formation on the globe or build-up of soot on the interior of the super structure when tested as specified in 4.5.2.

3.4.1.5 Globe-lifting mechanism. The globe-lifting mechanism (when furnished) shall not permit the globe to fall out when the lantern is held in any position and the globe-lifting mechanism is rapidly operated between the limits of the lifting and lowering motions.

3.4.1.6 Filler hole and cap. The filler hole (when furnished) shall be coated sheet steel, threaded, and securely joined to the fount. The filler cap (when furnished) shall be coated sheet steel, or molded plastic in accordance with the manufacturer's commercial practice, threaded to engage the threads of the filler hole, and provided with a fiber washer to make the filler hole assembly oil tight (see 3.4.1.1 and 4.5.1.2).

3.4.1.7 Bail. The normal position of the bail shall be such that it will remain sufficiently cool for handling when tested as specified in 4.5.3. With the bail upright, the distance between the top of the bail and the top of the dome shall be not less than 4 inches.

3.4.1.8 Globe style and dimensions. For the style hereinafter specified, the shape of the globe shall be in similar configuration to the referenced figures, and the dimensions shall comply with those specified in table I. The globe shall be readily removable without use of tools, excessive pressures, or interference with assembled members.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.2 Construction.

3.4.2.1 Type I, cold blast tubular frame. The type I, cold blast lantern shall have two hollow side tubes, which shall form air passages between the dome and the base of the burner support. Fresh air shall be drawn into the tubes at the top after having been warmed by the heated dome. The opening above the wick in the burner cap shall provide the outlet for the gases drawn into the base of the burner support through the side tubes. The lantern shall have a fount, burner, burner cap, two globe-guard wires, globe-lifting mechanism, filler hole and cap, bail, wick, dome, and globe.

3.4.2.2 Classes, type I.

3.4.2.2.1 Class A. The type I, class A lantern shall be similar in configuration to figure 5, and shall conform to the dimensions given in table II. The globe shall be style F, and the color shall be as specified (see 6.2). The capacity of the fount shall be not less than 32 fluid ounces. The fount filled to capacity shall not overflow either above the fill opening or into the burner receiving hole when tested as specified in 4.5.4. The burning time shall be not less than 45 hours when tested as specified in 4.5.5. The wick shall be 7/8 inch wide (plus or minus 1/16 inch) by 1/16 inch thick nominal, and not less than 7 inches long.

3.4.2.2.2 Class B. The type I, class B lantern shall be similar in configuration to figure 6, and shall conform to the dimensions given in table II. The globe shall be style B, and the color shall be as specified (see 6.2). The capacity of the fount shall be not less than 16 fluid ounces. The fount filled to capacity shall not overflow either above the fill opening or into the burner receiving collar when tested as specified in 4.5.4. The burning time shall be not less than 30 hours when tested as specified in 4.5.5. The wick shall be 5/8 inch wide (plus or minus 1/16 inch) by 1/16 inch thick nominal, and not less than 7 inches long.

3.4.2.3 Side tubes. The side tubes shall form rigid connecting members between the dome and the fount. Each side tube shall be formed from two pieces of either uncoated or coated sheet steel which are joined together with two inserted joints, and have two continuous flat clinched seams. Tube walls shall be either smooth or beaded. The outside diameter of the tubes shall be not less than 5/8 inch. The lower end of the tubes shall be joined to the fount or burner support with the seams completely soldered or welded. The tops of the tubes shall be inserted into the outer cylinder of the dome and shall be permanently secured.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. Lanterns: dimensions

Type and class	Overall height, bail down plus or minus 10 percent A	Outside diameter of base, minimum B
	Inches	Inches
Type I:		
Class A (see fig. 5)	13-1/4	6-3/4
Class B (see fig. 6)	11-1/2	5-3/4
Type IV (see fig. 7)	9-1/4	6

3.4.2.4 Dome. The dome shall be fabricated from material specified in 3.3.1.1. The dome shall consist of an outer cylinder, inner cylinder, inner baffle, helical wire spring, top plate, and wire pull. The bottom of the inner cylinder shall completely enclose the rim of the top of the globe. The top of the inner cylinder shall have openings to permit burned gases to escape. The inner cylinder shall extend upward through the outer cylinder, and by means of the spring shall exert sufficient pressure to firmly and securely hold the globe in position. The top plate shall protect the cylinder openings against entrance of rain drops. The wire pull, when operated, shall permit release of the pressure of the inner cylinder on the globe rim. The arrangement of inner baffle, and outer and inner cylinders, shall be such as to make the normal flame of the wick windproof, and prevent mixing of burned gases with the fresh air drawn into the side tubes (see 4.5.7).

3.4.2.5 Fount. The fount shall be coated sheet steel conforming to the requirements specified in 3.3.1.1. The fount shall be one piece drawn or shall be formed of a body and bottom. The fount bottom, if applicable, shall be joined to the body with an oiltight double-folded joint. The bottom shall be stiffened by means of concentric offsets, concaving or embossing.

3.4.2.6 Burner cap. The burner shall be provided with a coated sheet steel or brass cap having an opening above the wick.

3.4.2.7 Globe-guard wires. The globe-guard wires shall be made of wire specified in 3.3.1.2 and shall be 0.105-inch-nominal diameter. The wires shall cross each other at diametrically opposite points adjacent to the unprotected surface of the globe and approximately 2 inches above the bottom edge of the globe. The wires shall be securely fastened to a coated sheet, globe-supporting plate, and shall contact the globe at the points where they cross each other. The globe-supporting plate shall be perforated to admit air into the globe below the flame.

3.4.2.8 Globe-lifting mechanism. The globe-lifting mechanism shall be fabricated from wire specified in 3.3.1.2, and consist of a formed wire lift with integral lever and a lever guide which locks the lever at the top and bottom of the lift positions. The wire lift shall be steel, zinc-coated, and of a 0.140-inch nominal diameter. The wire lift shall be hinged to the globe-supporting plate and supported at both side tubes. The lever guide shall be securely welded or soldered to one side tube. The lever shall lift the assembly comprising inner cylinder, globe guards, and globe-supporting plate so the wick may be readily ignited with a match.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.




Figure 1 - Style B globe for type I, class B lantern.




Figure 2 - Style C globe for type IV lantern.




Figure 3 - Style D globe for type IV lantern.




Figure 4 - Style F globe for type I, class A lantern.

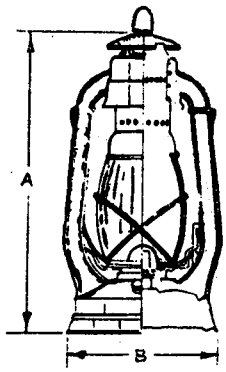


Figure 5 - Type I, class A, large size, medium globe. (See table II for dimensions A and B.)




Figure 6 - Type I, class B, small size, short globe lantern. (See table II for dimensions A and B.)




Figure 7 - Type IV lantern. (See table II for dimensions A and B.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I.—*Globes: dimensions*

	Outside rim diameter at bottom B			Outside rim diameter at top T			Over-all height H			Rim height at top M			Rim height at bottom N			Major diameter				
																Outside diameter D			Height above base K	
	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum	Minimum	Maximum
	Inch	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*
Style B (see figure 1)	2 13/16	2 3/4	2 7/8	3 1/4	3 3/32	3 3/8	3 13/16	3 3/4	4	3/16	3/32	9/32	3/16	5/32	1/4	4 1/8	3 15/16	4 1/4	1 1/2	1 3/4
Style C (see figure 2)	3 1/4	3 3/16	3 5/16	2 1/2	2 7/16	2 9/16	4 29/32	4 1/2	5 7/16	--	--	--	1/8	3/32	5/16	4 9/16	4 1/2	4 5/8	1 1/4	1 3/4
Style D (see figure 3)	3 1/4	3 3/16	3 5/16	3 1/4	3 3/16	3 5/16	3 1/4	3 3/16	3 5/16	--	--	--	--	--	--	4 15/32	4 13/32	4 17/32	1 1/2	1 3/4
Style F (see figure 4)	3 7/16	3 3/8	3 1/2	3 1/2	3 7/16	3 9/16	4 5/8	4 9/16	4 11/16	1/4	3/16	5/16	1/8	3/32	3/16	4 3/8	4 5/16	4 7/16	2 1/8	2 1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.2.9 Bail. The bail shall be formed of wire specified in 3.3.1.2 not less than 0.134-inch nor more than 0.156-inch diameter. The bail shall not become detached when tested as specified in 4.5.6.

3.4.2.10 Finish. The lantern shall be finished as follows, according to the kind of sheet metal used:

(a) The lantern shall have the natural zinc or terne-metal finish when the side tubes, the exterior members of the dome, and top and sides of the fount are made of zinc-coated, or terne-metal sheets.

(b) The lantern shall have a durable, tightly adherent enamel, lacquer, or paint finish in accordance with the manufacturer's current commercial practice when any side tube or exterior member of the dome is uncoated or electrolytic tin coated sheet steel. The color shall be dark green.

3.4.3 Type IV, wire frame, short globe (style C or D), 3/8-pint capacity, 5/8-inch wick. The type IV, wire frame lantern shall have a frame made of six or more upright supports, either straight or curved, and two or more horizontal wires. The horizontal wires and at least four of the upright wires shall be not less than 0.148 inch in diameter or 1/16-inch thick by 1/4-inch wide (min) flat steel stampings. Each of the upright wires shall be securely interlocked with each of the horizontal wires, either by means of welded joints or formed wire loops. The frame shall be securely welded to either the fount or air intake member. The lantern shall have a dome, burner, fill opening and cap (when furnished), bail, wick, and globe. The arrangement and fabrication of the dome and air intake member shall provide a normal flame unaffected by the wind or rain when tested as specified in 4.5.7. The lantern shall be similar in configuration to figure 7 and shall conform to the dimensions given in table II. The globe shall be either style C or D at the option of the supplier. Unless otherwise specified (see 6.2) a ruby colored globe shall be furnished. The capacity of the fount shall be not less than 6 fluid ounces, nor more than 16 fluid ounces. The fount filled to capacity shall not overflow either above the fill opening (when furnished) or into the burner receiving collar when tested as specified in 4.5.4. The wick shall be 5/8 inch wide (plus or minus 1/16 inch) by 1/16 inch thick and not less than 7 inches long. The burning time shall be not less than 20 hours when tested as specified in 4.5.5.

3.4.3.1 Dome. The dome shall consist of a perforated globe cover, baffles, globe-cushioning plate with wire spring, steel hinge, and wire cover-locking clip. The cover, baffles, and cushioning plate shall be made of coated sheet steel. The dome shall be hinged to the frame and securely locked with the frame by means of the locking clip. The locking clip shall not release the cover

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

when any opening force is applied with the fingers to the edge or any portion of the cover. The cushioning plate shall, by means of the spring, apply sufficient pressure to the top rim of the globe to firmly hold it in position.

3.4.3.2 Fount. The fount shall be coated sheet steel conforming to the requirements specified in 3.3.1.1. The fount shall be one piece drawn or formed of a body and bottom. The fount bottom, if applicable, shall be joined to the body with an oil-tight double-folded joint, and shall be stiffened by means of a reinforcing wire ring, concentric offsets, concaving, or embossing. The fount shall not leak when tested as specified in 4.5.1.2.

3.4.3.3 Air-intake member. The air-intake member (when furnished) shall be either uncoated or coated sheet steel and permanently secured to the fount with an oiltight joint. It shall have perforations through which air is supplied to maintain the burner flame. It shall have a burner-receiving collar, of either uncoated or coated sheet steel which shall be either soldered to the fount, or permanently fastened to the fount with an oiltight inserted joint. The air intake member shall not leak when tested as specified in 4.5.1.2.

3.4.3.4 Bail. The bail shall be formed of zinc-coated steel wire not less than 0.134 inch nor more than 0.156 inch in diameter. The ends of the bail shall be looped and permanently attached to the frame. The bail shall not become detached when tested as specified in 4.5.6.

3.4.3.5 Finish. Unless otherwise specified (see 6.2), the lantern shall have a durable, tightly adherent enamel finish in accordance with industry practice. The color shall be bright red.

3.5 Identification marking. Each lantern shall be permanently embossed with the manufacturer's identification and model designation. Letters, numerals, and other characters shall be of such size as to be clearly legible.

3.6 Workmanship. The finished lantern shall be clean and free from sharp edges, burrs or splinters. All finished surfaces shall be adherent and free from areas of no coating, rust, cracks, blisters, peeling, embedded foreign matter, fins, burrs, sharp edges, slivers, splinters. Welding shall be continuous, completely fused, and shall be free of burn or pinholes, cracks, fractures, slags or flux deposits. Soldering shall have complete fusion and be smooth and free of flux and flux residue.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample. When a preproduction sample is required, it shall be examined for defects listed in table III, dimensions specified, and tested as specified in 4.5.1 through 4.5.7.

4.3 Sampling for inspection. Sampling for inspection shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.4 Inspection.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 End item inspection. The inspection lot shall consist of all lanterns or globes of the same type, class and style offered for inspection at one time. The sample unit shall be one lantern, complete with globe; one lantern without globe; or one globe, as applicable.

4.4.2.1 Visual examination. The end item shall be examined for defects classified in table III. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE III. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish			
Enameled, lacquered or painted surfaces	Not specified type and color------		X
	Blistered, peeled, cracked, area of no coating, embedded foreign matter, nonadherent, area of rust----------		X
Metallic coatings	Not specified type, area of no coating (on nonpainted surfaces)-		X
	Coating not adherent----------		X
	Gritty surface, not smooth--------		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification	
		Major	Minor
Design, construction and workmanship (general) applicable to all components and assemblies	Component fractured, broken, split, punctured, torn, cracked, bent, dented, creased, bowed, sprung, loose, misplaced or otherwise malformed----------	X	
	Burrs, slivers or splinters-----	X	
	Any functioning component that requires abnormal force to operate ----------		X
	Globe falls out when filling mechanism is raised or lowered in any position----------	X	
	Not clean----------		X
Fount (types I and IV as applicable)	Bottom not stiffened as specified		X
	Bottom not joined to body by double fold joint (when applicable)----------		X
Burner cap	Opening missing in cap above wick	X	
	Cap not coated sheet steel or brass----------		X
Globe-guard wires (type I)	Wires do not cross each other at diametrically opposite points, adjacent to unprotected surface of globe----------	X	
	Wire not securely fastened to globe-supporting plate---------		X
	Wires do not contact globe at crossing point----------		X
	Globe-supporting plate not perforated----------	X	
Globe-lifting mechanism	Component missing i.e., formed wire lift with integral lever, lever guide----------	X	
	Wire lift not hinged to globe-supporting plate----------	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification	
		Major	Minor
Design, construction and workmanship (general) applicable to all components and assemblies (cont'd)			
Dome (type I)	Component missing i.e., outer cylinder, inner cylinder, inner baffle, helical wire spring, top plate, wire pull--	X	
	Bottom of inner cylinder does not completely enclose rim of globe top----------		X
	Holes in top cylinder missing (type I)----------	X	
	Spring missing from inner cylinder----------	X	
	Wire pull inoperative----------	X	
Dome (type IV)	Wire frame (type IV) upright support missing-------		X
	Horizontal wire missing--------	X	
	Upright support not interlocked with horizontal wire as specified----------	X	
	Frame not welded to fount or intake member----------	X	
	Component missing, i.e. dome cover burner, filler opening and cap (when furnished), bail, wick, globe, baffles, globe-cushioning plate, steel hinge and wire locking clip----------	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification	
		Major	Minor
Design, construction and workmanship (general) applicable to all components and assemblies (cont'd)			
Dome (type IV) (cont'd)	Not supported at both side tubes	X	
	Lever guide not welded or soldered to one side tube	X	
	Lever does not operate as specified	X	
Air intake (when furnished) (type IV)	Perforations missing	X	
	Burner collar missing		X
	Collar not soldered or welded to fount or fastened with inserted joint		X
Welding (when applicable)	Missing, burn or pin holes, cracked, fractured, not continuous, not adherent or not fused	X	
	Slag inclusion, not smooth and uniform, scale or flux deposits not removed		X
Soldering (when applicable)	Not adherent or fused	X	
	Not clean (flux or flux residue not removed) not smooth		X
Bail	Not as specified		X
Marking	Missing, incomplete, illegible; not as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination. An examination shall be made of the lanterns for compliance with dimensions specified. A dimension not within specified tolerances shall constitute a defect. The inspection level shall be S-2 with an AQL of 6.5 defects, expressed in terms of defects per hundred units.

4.4.2.3 Testing of the end item. When a preproduction sample is not required, the initial production unit shall be tested in accordance with 4.5.2, 4.5.3, 4.5.4, 4.5.5 and 4.5.7. Tests for leakage and pull of bail shall be in accordance with 4.5.1 and 4.5.6 respectively. The inspection level shall be S-1 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.4.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table IV. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Component missing or damaged.
Workmanship	Bulging or distortion of containers.
	Cushioning inadequate, improper or missing.
Contents	More or less than required.

4.4.3.1 Examination for closure and strapping of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

4.5 Tests.

4.5.1 Leakage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.5.1.1 Assembled lantern. The assembled lantern, with the fount filled to capacity with kerosene, shall be placed on a level surface for 1 hour. The lanterns shall then be examined for compliance with 3.4.1.1.

4.5.1.2 Burner and fill opening. The lantern fount, filled to capacity with kerosene and not ignited, shall be inclined at an angle of 45° with the vertical, preferably by securing its base to a surface inclined 45° with the horizontal. During the test, the filler cap shall be secured and fill opening shall be at the lowest elevation. The lantern shall then be examined for compliance with 3.4.1.1, 3.4.1.6, 3.4.3.2, and 3.4.3.3.

4.5.2 Smokeless flame. The lantern fount shall be filled to capacity and the wick ignited. The lantern shall burn with a normal flame for 3 hrs. Flame, superstructure and globe shall then be observed for compliance with 3.4.1.4.

4.5.3 Heat transmission. After the lantern has been burning with a normal flame for 3 hours, the lantern shall be picked up by the bail and checked for conformance to the requirements specified in 3.4.1.7.

4.5.4 Capacity test. Using an adequate liquid measure, the specified amount of kerosene shall be poured into the fount and examined for compliance with 3.4.2.2.1, 3.4.2.2.2 and 3.4.3.

4.5.5 Burning time. With the lantern filled to capacity and the flame adjusted to normal size, the burning time shall be tested without any further adjustment or addition of kerosene for compliance with 3.4.2.2.1 and 3.4.2.2.2.

4.5.6 Pull of bail. A pull of 30 pounds shall be applied at either end of the bail, normal to the side tubes, with the bail either down or upright. Results shall be examined for compliance with 3.4.2.9 and 3.4.3.4.

4.5.7 Wind and rain test. An atmosphere simulating a wind and rain storm shall be produced. The wind velocity shall be not less than 10 miles per hour. The lantern shall be ignited and subjected to this atmosphere for not less than 30 minutes and observed for compliance with 3.4.2.4 and 3.4.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Lantern, complete with globe. The globe of each lantern shall be wrapped in cellulosic cushioning material conforming to type II, class B of PPP-C-843. Sufficient cushioning material shall be used over the top and bottom edges of the globe as necessary to prevent movement or vibration while in place within the lantern frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.1.1.2 Lantern without globe (when procured as a separate item, see 6.2). Lanterns without globes shall not require packaging.

5.1.1.3 Globes only (when procured as a separate item, see 6.2). Each globe shall be completely wrapped with cushioning material specified in 5.1.1.1. The wrap shall be secured with 1-inch width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.2 Level C. Lanterns with globes, lanterns without globes, and globes only shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Twelve lanterns complete, or twelve lanterns without globes, or twelve globes of one type and class only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. Each shipping container shall be provided with a full height corrugated fiberboard liner, top and bottom pads, and full height interlocking partitions to provide an individual cell for each item being packed. The fiberboard liner shall conform to type CF, class domestic, variety DW, AB-flute, grade 275, and the top and bottom pads and partitions shall conform to type CF, class domestic, variety SW, B-flute, grade 275 of PPP-F-320. The B-flute of the fiberboard liner shall face the items being packed. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Unless otherwise specified (see 5.2.2.1) twelve lanterns complete, or twelve lanterns without globes, or twelve globes of one type and class only packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that shipping container shall conform to style RSC-L, type CF, variety SW, or type SF, class domestic of PPP-B-636; waterproofing shall not be required; and closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Lanterns with globes, lanterns without globes, and globes only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2.1 Additional marking. Each shipping container containing lanterns complete, or globes only shall be marked in accordance with the special handling marking requirements applicable to fragile items and the word "glass" in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The lanterns covered by this specification are intended for illumination and signal purpose.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and class required or style of globe required (see 1.2.1).
(c) When preproduction sample is required (see 3.1).
(d) When globes are to be procured as separate items (see 1.1, 1.2.1, 5.1.1.2 and 5.1.1.3).
(e) Color of glass globes required (see 3.3.2).
(f) When ruby colored glass globe for type IV is not required (see 3.4.3).
(g) Finish required if other than specified (see 3.4.3.5).
(h) Selection of applicable level of packaging and packing (see 5.1 and 5.2).
(i) When V3c or V3s fiberboard is required for level B pack (see 5.2.2.1).

6.3 Deletion data. The following types of lanterns specified in RR-L-112b, dated October 24, 1960, have been deleted from this specification:

Type I Class C - Cold blast, tubular frame. Small size, short globe (style B), 32 ounce capacity, 13/32-inch wick, 100 hours burning time.

Type II - Cold blast, wire and tubular frame, short globe (style E), 5/8-pint capacity, 31/64-inch wick, 12 hours burning time.

Type III - Hot blast, tubular frame, high globe (style A), 1 pint capacity, 5/8-inch wick, 30 hours burning time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - YD
Air Force - 82

Review activities:

Army - MD
Navy - YD
Air Force - 82, 85

User activities:

Army - CE, ME
Navy - MC

Preparing activity:

Army - GL

Civil Agency Interest:

GSA
AGR
INT
VA
COM-NBS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price -- cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Lanterns, Kerosene, Hand, Globe - RR-L-112c

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.