RR–O–376a
30 APRIL 1953
SUPERSEDING
Fed. Spec. RR–O–376
9 May 1938

FEDERAL SPECIFICATION

OILER, HAND

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification covers hand oilers of various types. Oilers are also known as "oil cans", "pistol oilers", "fillers", "trigger oilers", "hydraulic oilers" and other similar designations, dependent upon design and construction. Pistol and trigger oilers are classified in this specification as pump oilers without handles. Oilers might be used for lubricating machinery or automotive equipment with any type of oil that will flow, similar to 8, 10, 20 or 30 grades of oil covered in Federal Specification VV–O–526, except that pump oilers without handles are generally used for lighter oils such as grades 8 or 10. The filler type is generally used for filling large oil cups on heavy machinery with the heavier oils such as 20 or 30 grade. Typewriter oil cans which operate by pressing the sides of the can are covered by Federal Specification RR–C–87.

1.1.1 This specification covers only the types, classes, sizes, etc., of the oilers generally purchased by the Federal Government, and does not include all types, etc., which are commercially available.

1.2.1 Classification.

Grade, types and classes.—The oilers covered by this specification shall be of one grade and of the following types and classes, as specified (See 6.1):

Type **I.**—Push-bottom, steel.
  Class A.—With machine cut threads.
  Class B.—With rolled threads or other suitable connection.
Type **II.**—Pump.
  Class A.—With handle.
  Class B.—Without handle.
Type **III.**—Filler.
Type **IV.**—Rectangular, push side.

203425—53—No. 238

1.2.2 *Sizes.*—Oilers shall be of the sizes shown in the respective tables and as specified. (See 6.1.)

2. APPLICABLE SPECIFICATIONS AND OTHER PUBLICATIONS

2.1 Specifications.—The following Federal Specification, of the issue in effect on date of invitation for bids, forms a part of this specification:

VV–O–526 Oil; Lubricating, Machine.

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by check, money order, or cash, or Government Printing Office coupons to the General Services Administration, Business Service Center, Region 3, Seventh and D Streets, S. W., Washington 25, D. C. This office will also honor deposit account numbers issued by the Government Printing Office. Single copies of product specifications required for bidding purposes are available without charge at the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C. Prices of additional copies may be obtained from the GSA Regional Offices.)

2.2 Other publication.—The following Military Standard, of the issue in effect on date of invitation for bids, forms a part of this specification:

MIL – STD – 105.—Sampling Procedures and Tables for Inspection by Attributes.

(Copies of the Military Standard referenced above required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.3 Specifications and other publications applicable only to individual departments are listed in section 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General requirements.

3.1.1 *Illustrations.*—The illustrations shown in figures 1 to 4 inclusive, are for the convenience of identification and are not intended to preclude the purchase of oilers which are otherwise in accordance with this specification.

3.1.2 *Material.*—Material shall be as hereinafter specified.

3.1.3 *Spouts.*—When specified by the procuring agency, oilers shall be furnished with a flexible metal spout and shall be so designed and constructed that the spout can be bent 90° and remain in that position within 5°. Length of spout shall be as specified. (See 6.2).

3.1.4 *Washers.*—Washers shall be furnished with all oilers. The washers shall be impervious to oil and shall have adequate oil-sealing qualities.

3.1.5 *Marking.*—Each oiler shall be marked in a plain and permanent manner with the manufacturer's name or with a trade-mark of such known character that the source of manufacture may be readily determined.

3.1.6 *Finish.*—Oilers of type I, class A, shall be polished and clear lacquered. All other types and classes of oilers shall be lacquered with an opaque lacquer, or polished, copperplated, and clear lacquered, except when the basic metal is corrosion resistant.

3.1.6.1 *Polished and clear-lacquered finish.*—Polished and clear-lacquered finish, when examined under normal illumination without magnification, shall be a polished surface finish free from drawing scratches or other objectionable marks. The polished surfaces shall be completely coated with a clear transparent lacquer. The lacquer shall not be tacky, shall not adversely affect the material coated, and shall be suitable for the prevention of rust.

3.1.6.2 *Polished, coppercoated or copperplated and lacquered finish.*—Polished, coppercoated or copperplated and lacquered finish, shall be a polished or otherwise suitably finished surface free from drawing scratches or other objectionable marks that might appear through the copper plating or coating. Unless otherwise specified, the copper plating or coating may be applied by an electro or other similar deposited method (see 6.2). The copper plating or coating shall have adequate corrosion-resistant properties. The copper plating unless applied by an electrostatic spray method shall be coated with a clear transparent lacquer. The lacquer shall not be tacky and it shall not adversely affect the copper plating.

3.1.6.3 *Finish on corrosion-resistant metals.*—Unless otherwise specified, oilers of corrosion-resistant metals need not be coated or plated. The surface finish shall be free from drawing scratches or other objectionable marks.

3.2 Detail requirements.

3.2.1 *Type I, class A push-bottom oilers with machine cut threads.*—Type I, class A oilers shall be similar to figure 1a and shall consist essentially of a body, washer as specified in 3.1.4 and a spout. The spout and body shall be connected by means of machine cut threads on both components. Material thicknesses and dimensions shall be in accordance with table Ia for the respective sizes.

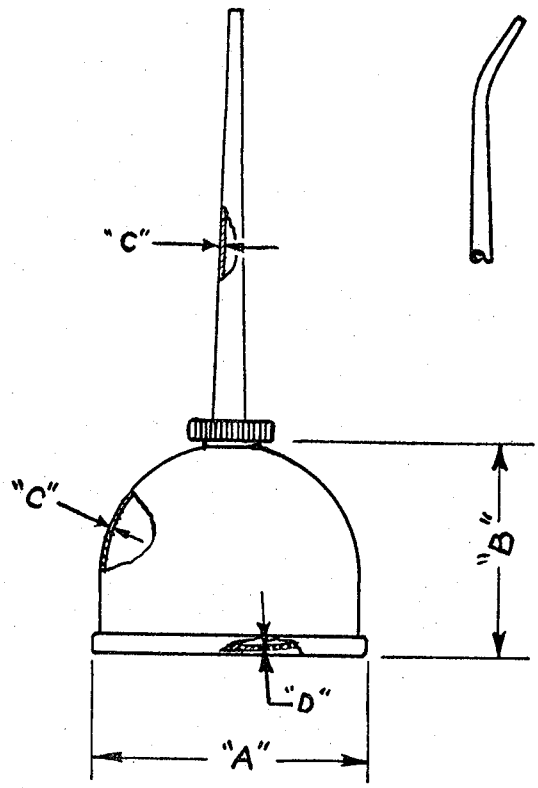


FIGURE 1a.—*Type I, class A oiler, push-bottom with machine cut threads.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE Ia.—*Type I, class A oilers*

Size, nominal	"A" diameter		"B" height		"C" wall thickness	"D" bottom thickness	Capacity
	Minimum	Maximum	Minimum	Maximum	Minimum	Minimum	Minimum
Pint	*Inches*	*Inches*	*Inches*	*Inches*	*Inch*	*Inch*	*Fluid ounces*
⅓	3	4	2	3	0. 030	0. 012	5
½	3	4	2	3½	. 030	. 012	8
¾	3	5	2	4	. 030	. 014	10
1	3½	5½	2	4	. 030	. 014	16

3.2.1.1 *Body.*—The body for type I, class A oilers shall consist of a one-piece, seamless, cold-rolled-steel, drawn top section and a spring-action bottom. The drawn top section and bottom shall be securely fitted to each other and shall afford a strong and leak-proof joint. The body shall have an opening in the top of not less than ¾ inch in diameter. This opening shall be either fitted with a solid-brass collar or the top part of the body opening shall be reinforced with a solid-metal neck in a manner to prevent weakening connections when the threads are cut.

3.2.1.2 *Spouts.*—Type I, class A oiler spouts shall be of cold-rolled steel and furnished in lengths of 4, 6, 9, or 12 inches as specified in the invitation for bids. If no spout length is specified, spouts 4 inches long shall be furnished for the ⅓- and ½-pint oilers and spouts 6 inches long for the ¾- and 1-pint oilers. Spouts shall be either straight or bent as specified in the invitation for bids. The spout shall be fitted with a solid brass bushing having machine cut threads suitable for engagement in the threaded opening of the body. The spout seam shall be welded, brazed, or silver soldered. Lead-tin solders are not acceptable. The fitting of the collar and spout shall afford a strong and leak-proof joint.

3.2.2 *Type I, class B, push-bottom oilers with rolled threads or other suitable connection.*—Type I, class B oilers shall be similar to figure 1b and shall consist essentially of a body, washer as specified in 3.1.4, and a spout. Unless otherwise specified, the body and spout shall be connected by rolled threads or other suitable connection on both components. The oilers shall be in accordance with table Ib.

3.2.2.1 *Body.*—The body for type I, class B oilers shall consist of a one-piece seamless cold-rolled-steel top section and a spring-action bottom. The top section and bottom shall be securely fitted to each other with a strong and leak-proof joint. Oilers of 1½-ounce capacity

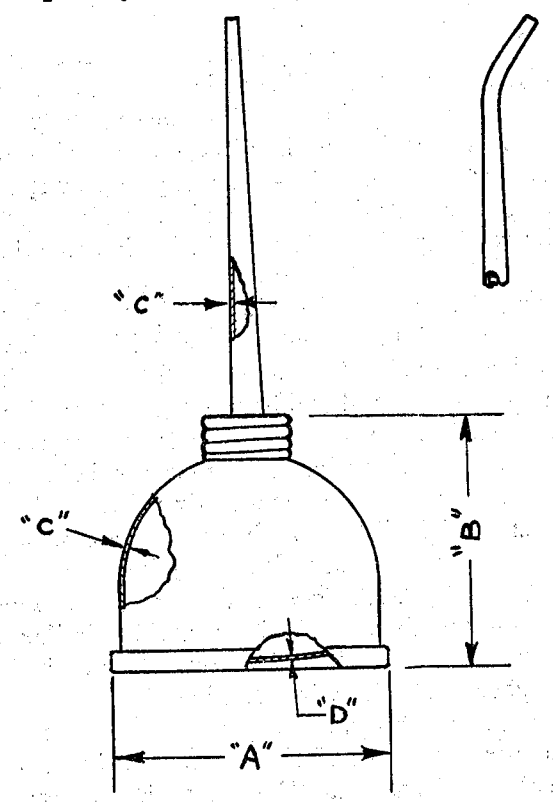


FIGURE 1b.—*Type I, class B oiler, push-bottom, with rolled threads or other suitable connection.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE Ib.—*Type I, class B oilers*

Size, nominal	"A" diameter		"B" height		"C" wall thickness	"D" bottom thickness	Capacity
	Minimum	Maximum	Minimum	Maximum	Minimum	Minimum	Minimum
	Inches	*Inches*	*Inches*	*Inches*	*Inch*	*Inch*	*Fluid ounces*
½ ounce	1½	2½	1	2	0. 012	0. 010	½
1 ounce	1½	2½	1	2	. 015	. 010	1
1½ ounces	2	3	1	2½	. 015	. 010	1½
⅓ pint	3	4	2	3	. 017	. 010	5
½ pint	3	4	2	3½	. 017	. 010	8
¾ pint	3	5	2	4	. 018	. 010	10
1 pint	3½	5½	2	4	. 018	. 010	16

and smaller shall have an opening in the top of the body of not less than ½ inch in diameter and oilers larger than 1½-ounce capacity shall have an opening of not less than ¾ inch in diameter. Rolled threads or other suitable connection shall be provided at the top of the body to receive the spout.

3.2.2.2 *Spouts.*—Spouts for type I, class B oilers shall be of cold-rolled steel and be 2 or 4 inches long for oilers of 1½-ounce capacity and smaller, and in lengths of 3, 5, or 9 inches for oilers larger than 1½-ounce capacity as specified in the invitation for bids. If no spout length is specified, spouts 5 inches long shall be furnished for ¾-pint oilers and spouts 3 inches long for smaller-size oilers. Spouts shall be either straight or bent as specified in the invitation for bids. The spout shall be fitted with a cold-rolled-steel cap having rolled threads or other suitable connection to fit the mating connection on the body. The spout seam shall be welded, lead-tin soldered, silver soldered, or brazed. The fitting of the cap and spout shall afford a strong and leak-proof joint.

3.2.3 *Type II, class A, pump oilers with handle.*—Type II, class A oilers shall be similar to figure 2a and shall consist essentially of a body, washer as specified in 3.1.4, handle, spout, and pump. The body, handle, and spout shall be of cold-rolled steel and the pump shall be of all-metal construction. The pump shall be easily removable from the can. The oilers shall comply with the requirements of table IIa for the respective sizes.

3.2.3.1 *Body.*—Bodies shall be provided with a top section either of drawn- or fabricated-seam construction having welded, brazed, or silver-soldered seams and shall be not less than 0.018

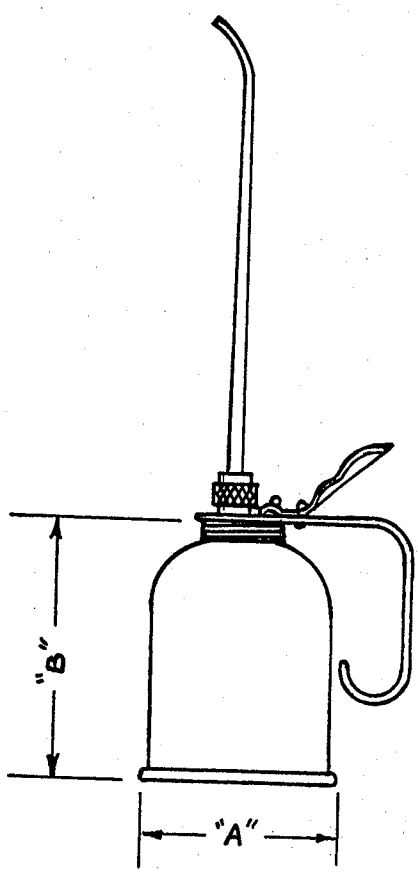


FIGURE 2a.—*Type II, pump oiler, class A, with handle.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE IIa.—*Type II, class A oilers*

Size, nominal	"A" diameter		"B" height		Capacity
	Minimum	Maximum	Minimum	Maximum	Minimum
Pints	*Inches*	*Inches*	*Inches*	*Inches*	*Fluid ounces*
1	3	4	3	5	16
1½	3	4½	4	6	24
2	3½	5	5	7	32

inch thick for the 1½-pint size and not less than 0.025 inch thick for the 2-pint size. Lead-tin-soldered seams will be acceptable provided the soldered seams are at least 1 inch from the bottom of the can. The bottom shall be securely fitted to the top section to afford a strong and leak-proof joint. The body shall have an opening at the top not less than 1 inch in diameter with threads or other suitable connection for receiving the pump unit.

3.2.3.2 *Pump.*—The pump shall be self-priming and shall function in any position with 8, 10, 20, or 30 grades of oil or any similar grades that will flow and are ordinarily used for lubricating purposes. The pump parts shall be of metal construction and the pump shall be operated by a conveniently placed lever. The pump shall be capable of removing at least three-fourths of the oil contents of the can without its being tilted from the normal upright position.

3.2.3.3 *Handle.*—The handle stock thickness shall be not less than 0.032 inch and the edges shall be rolled back 190°, or otherwise suitably reinforced.

3.2.3.4 *Spout.*—Spouts shall be 6, 9, or 15 inches long as specified in the invitation for bids. If no spout length is specified, the 6-inch spout shall be furnished. Rigid spouts shall be seamless or have a welded, lead-tin-soldered, silver-soldered or brazed, leak-proof seam and shall be not less than 0.017 inch thick. The spout shall be readily detachable and joined to the pump unit by threaded or other suitable connection. Unless otherwise specified, the spout near its vent end shall be bent. The bend shall be in the opposite direction from the handle for offset filling.

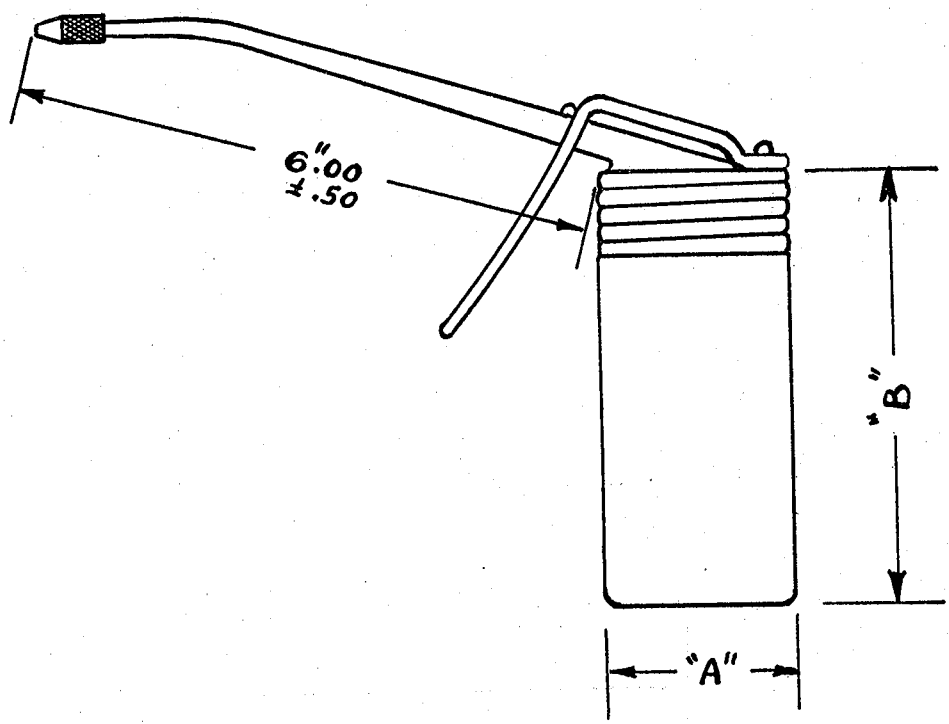


FIGURE 2b.—*Type II, pump oiler, class B, without handle.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE IIb.—*Type II, class B oilers*

Size, nominal	"A" diameter		"B" height		Capacity	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
Pints	*Inches*	*Inches*	*Inches*	*Inches*	*Fluid ounces*	*Fluid ounces*
¼	1½	2⅛	4¼	5¼	4	6
½	1½	2	5	8	6	10
1	1½	2½	8	10	16	22
2	1½	2½	9	11	28	36

NOTE.—The 2-inch dimension applies to the hand-grip area. A larger base diameter may be furnished if the base is of the flared design.

3.2.4 *Type II, class B pump oiler without handle.*—Type II, class B oilers (known commercially as pistol-grip oilers) shall be similar to figure 2b and be suitable for delivering either a drop or stream of oil, as wanted. The oiler shall be designed and constructed to operate satisfactorily at any temperature from minus 40° to plus 160° F. (minus 40° to plus 71.1° C.). The body shall afford a comfortable hand grip. These oilers shall consist essentially of a body, a washer as specified in 3.1.4, spout, and pump. The body, spout, and pump shall be of all-metal construction. The oilers shall be in accordance with table IIb for the respective sizes.

3.2.4.1 *Body.*—The top section of the body shall be either one-piece or of fabricated construction. Welding, silver soldering, or brazing of seams is permissible but lead soldering is not permissible unless the soldered seam is at least 1 inch from the bottom of the can. The metal in the top section and the bottom of the body shall be at least 0.015 inch thick.

3.2.4.2 *Pump.*—The pump shall be self-priming and shall function properly at a tem-

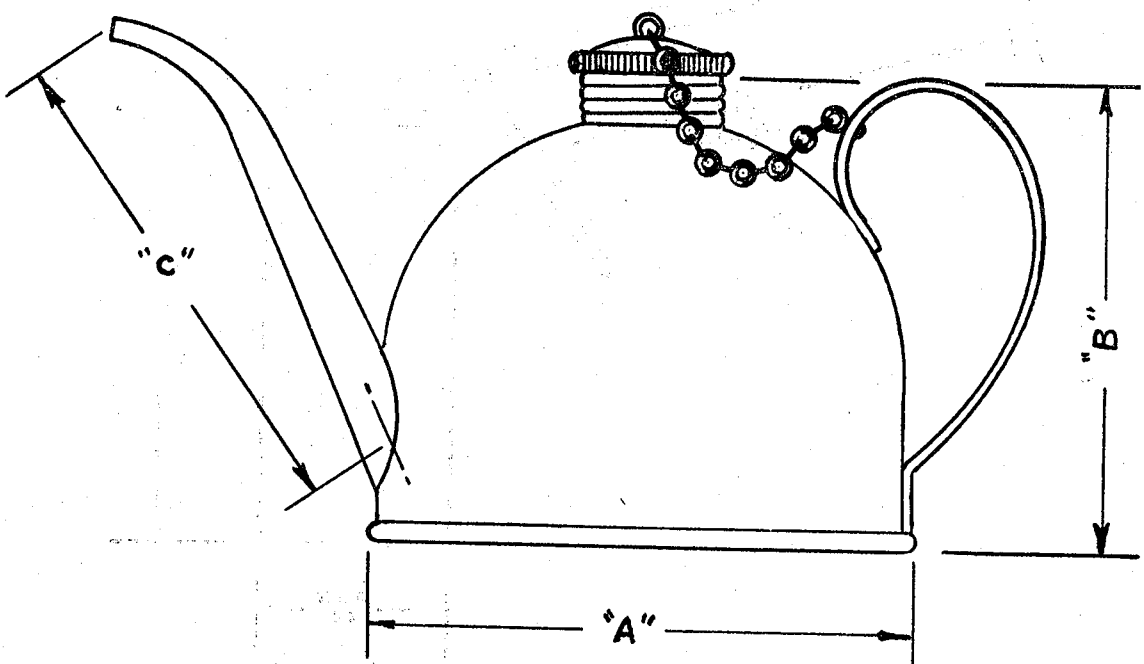


FIGURE 3.—*Type III, filler.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

TABLE III.—*Type III fillers*

Size, nominal	"A" diameter		"B" height		"C" spout length		Capacity
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum
Pints	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*	*Fluid ounces*
1	4	5	3	4	4	6	14
2	5	6	4	5	6	8	30
4	6	7	5	6	6	8	60

perature of minus 40° F. to a plus 160° F. (minus 40 to 71.1° C.). The pump shall function properly in any position with any oil of 8 or 10 grade that will flow readily and is ordinarily used for lubricating purposes. The structural parts of the pump shall be of metal and unless otherwise specified, the pump shall be operated by a conveniently placed lever or a plunger with button head. The pump shall be capable of removing at least 95 percent of the oil contents of the can without its being tilted from the normal upright position.

3.2.4.3 *Spout.*—The spout shall be seamless or shall have a welded, silver-soldered, or brazed seam and shall be not less than 0.020 inch thick. Unless otherwise specified in the invitation for bids, the outer end of the spout shall be fitted with a suitable cone-shaped nozzle. The length of the spout, including the nozzle fitting, shall be not less than 5½ inches. Unless otherwise specified, the spout shall be either bent or straight.

3.2.5 *Type III, fillers.*—Type III, fillers, shall be similar to figure 3 and shall be made of cold-rolled steel, and shall consist essentially of a one-piece seamless body with attached bottom, handle, spout cap, and chain. Fillers shall comply with the requirements of table III for the respective sizes stated in the invitation for bids.

3.2.5.1 *Body.*—The metal composing the top section and bottom of the body shall be not less than 0.025 inch thick. The top and bottom shall be joined securely to afford a strong and leak-proof construction. A suitable bushing shall be provided in the top of the body to be threaded for securing the cap.

3.2.5.2 *Spout.*—The joint between the spout and body and all seams shall be welded, silver-soldered, or brazed. Spout material shall be not less than 0.031 inch thick. The orifice at the outer end of the spout shall be not less than ¼ inch in diameter. Unless otherwise specified in the invitation for bids the spout shall be bent.

3.2.5.3 *Cap and chain.*—The cap shall be made of either steel or brass and shall have either rolled or machine-cut thread suitable for properly engaging the threads in the bushing provided in the body. The cap shall be attached to the handle by means of a suitable chain.

3.2.6 *Type IV, rectangular oilers.*—Type IV oilers shall be similar to figure 4 and shall consist essentially of a rectangular body, two washers as specified in 3.1.4 and a spout. The body and spout shall be of cold-rolled steel not less than 0.020 inch thick. The design shall be such that the spout may be either attached in the conventional manner for dispensing oil, or inverted and screwed into the body for storage. The oiler shall be leak-proof in either position.

TABLE IV.—*Type IV, rectangular oiler*

Size, nominal	"A" width	"B" height	"C" thickness	Capacity
	Minimum	Minimum	Minimum	Minimum
Pint	*Inches*	*Inches*	*Inches*	*Fluid ounces*
¾	3	6½	1¼	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

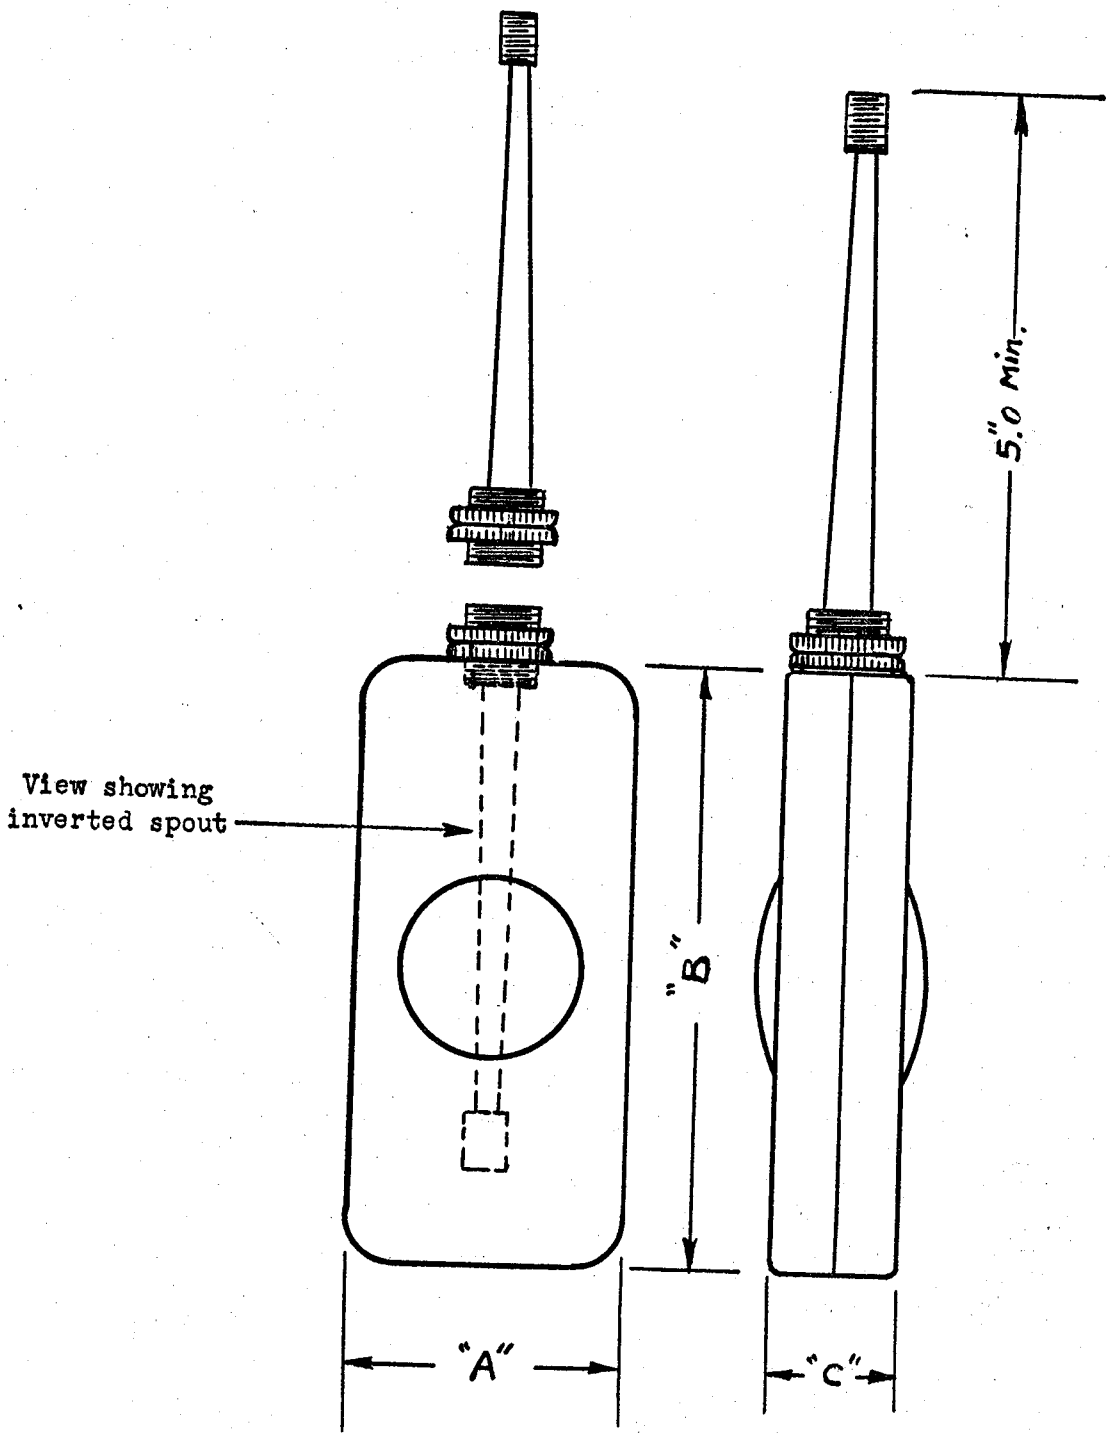


FIGURE 4.—*Type IV, rectangular oiler.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

The oilers shall comply with the requirements of table IV.

3.2.6.1 Portions of two of the vertical sides of the body shall be convex in a manner to eject oil from the can when pushed and to return to normal position when pressure is released. The opening in the top of the body shall be not less than three-fourths inch in diameter and shall be provided with an all metal bushing that is threaded to receive the threaded portion of the spout. Soldered seams are permissible in this type oiler.

3.2.6.2 *Spout.*—The orifice at the outer end of the spout shall be not less than one-eighth inch in diameter. The small end of the spout shall be provided with a suitable cap attached by a leak-proof threaded connection and be readily detachable. The large end of the spout shall be provided with an externally threaded sleeve having a knurled retainer containing two washers, one on each side of the knurled portion. The knurled retainer shall be located midway between the two threaded ends of the sleeve so that either end of the sleeve may be screwed into the can opening. The spout shall be straight.

3.3 *Workmanship.*—Workmanship shall be first class throughout. Oilers shall be free from defects which detract from their appearance or which may impair their serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 *Inspection lot.*—All oilers of the same type, class, and size presented at one time shall be considered a lot for purposes of acceptance, inspection, and tests.

4.2 *Sampling for lot acceptance.*—Sampling requirements shall be in accordance with Military Standard MIL–STD–105, A. Q. L. 1.5 percent defectives.

4.3 *Visual and dimensional inspection.*—Each of the sample oilers or fillers selected shall be visually and dimensionally inspected by the Government inspector to verify compliance with the requirements of this specification. Any oiler in the sample containing one or more visual or dimensional defects shall be rejected and if the number of defective oilers by class or characteristics in any sample exceeds the acceptance number, the lot shall be rejected. Rejected lots may be offered again for Government inspection provided the contractor has repaired or removed all nonconforming oilers. The Government inspector shall again select and examine samples from such resubmitted lots to verify compliance with the specification requirements. The sample units shall be checked for thickness of the material in spout, handles, etc., as required in 4.4.6 of specification.

4.4 Tests.

4.4.1 *Hydrostatic pressure test.*—The sample of welded, brazed or silver-soldered joint construction selected for tests under 4.1 shall be subjected to a hydrostatic pressure test of 5 pounds per square inch for a period of 5 minutes and shall show no evidence of leaking at the seams, joints, threads or other connections. Oilers of lead-tin-solder joint construction shall be tested for leakage but no hydrostatic pressure test will be required.

4.4.2 *Spout load test.*—The sample oilers taken for tests under 4.1 shall be subjected to the following spout load test: (1) Assemble the spout tightly to the can. (2) Support the body of the can with the spout extended in a horizontal plane. (3) Apply a 75 inch-pound load within 1½ inches of the vent end of the spout; as an example, apply a 10-pound load 7½ inches out on the unsupported end of the spout of an oiler with a nine-inch spout. In lieu of using a suspended weight, the same test can be accomplished by holding the oil-can body in the hands and applying the pressure on a platform scale with the predetermined load set up on the scale. The seam between the spout cap and the spout or any other seam shall not be opened up after this test and the spout shall not be bent or show any other signs of permanent deformation.

4.4.3 *Test of welded, brazed, or silver-soldered seams in the spout construction.*—A spout from one of the welded, brazed or silver-soldered seam construction oilers taken under paragraph 4.1 shall be removed and hammered flat for one-half of its length with the seam at the bend, and for the remainder of its length with the bend 90° from the seam, and under this test shall show no evidence of opening the seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

4.4.4 *Filler spout test.*—A spout on one of the fillers taken under paragraph 4.1 shall be hammered, as described in 4.4.3 without removal from the filler and shall not open at the seam or separate from the body.

4.4.5 *Filler handle test.*—With the handle and bottom rim of the filler supported on an anvil, the handle shall be hammered from the top side until the top and bottom part of the handle are brought within ½ inch of each other at 1 inch from the bend. After this test neither welded joint of the handle to the body shall show evidence of opening.

4.4.6 *Further use of samples.*—The samples used in the spout tests shall be used for checking the thickness of the material in spout, handles, bottom and the body, as specified in paragraph 3 and its subparagraphs. These samples shall also be used to check the seam, joints, and also the thickness of material at the root of machine cut threads which shall be at least equal to the thickness of the can body. The thickness of material at the root of the threads may include more than one thickness of material provided the layers are welded or brazed into one component.

5. PREPARATION FOR DELIVERY.

5.1 Packaging.—Unless otherwise specified, commercial packages are acceptable under this specification.

5.2 Packing.—The subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 Marking.

5.3.1 *Boxes or packages.*—Each box or package shall be plainly marked to indicate the name of the article, the size, the type, the class, the quantity contained therein, and the name of the manufacturer.

5.3.2 *Shipping containers.*—Unless otherwise specified, shipping containers shall be marked with the name of the article, the size, the type, the class, as defined by the contract or order under which shipment is made, the quantity contained therein, the name of the contractor, the number of the contract or order and the gross weight.

6. NOTES.

6.1 Ordering data.—The purchasing agency should specify the following on the invitation for bids.

a. Title, symbol and date of this specification
b. Type (see 1.2)
c. Class if required (see 1.2)
d. Size (see 1.2.2)

6.2 Optional ordering data.—The purchasing agency should specify any of the following options required for its order:

a. Flexible spouts (see 3.1.3)
b. Copper-plating method, if different (see 3.1.6.2)
c. Corrosion resistant metals, coating or plating, if different (see 3.1.6.3)
d. Spout lengths (see 3.1.3, 3.2.1.2, 3.2.2.2, 3.2.3.4)
e. Bent or straight spouts (see 3.2.3.4 and 3.2.4.3)
f. Lever or plunger (see 3.2.4.2)

6.3 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served should be definitely stated, the specification to apply in all other respects.

6.4 Transportation description. Transportation description applicable to these items is:

Oilers, hand (oiling cans)
In Barrels or boxes
Carload weight 20,000 pounds, subject to Rule 34, Consolidated Freight Classification
Truckload weight 20,000 pounds.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications and standard of the issues in effect on date of invitation for bids, and special requirements form a part of this specification for purchases made under this specification by the respective departments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.

7.2 Army, Navy, and Air Force.

7.2.1 *Applicable specifications and standard.*

Military Specification:

MIL-P-15424—Packaging of Hand Tools, General Specification for Domestic and Overseas Preservation.

Military Standard:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

NAVY INTEREST: A *MC* Or Sh S Y.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:09Z
Check the source to verify that this is the current version before use.