RR-P-54B
June 15, 1970
SUPERSEDING
Fed. Spec. RR-P-54A
May 9, 1967

FEDERAL SPECIFICATION

PANS, ALUMINUM ALLOY

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for aluminum pans for bakeshop and kitchen use.

1.2 Classification. The aluminumware covered herein shall be of the following types, sizes, and styles as specified (see 6.2):

Type I - Pan, baking and roasting.

- Size 1 - 13-1/4 by 9-1/4 inches top inside by 2-1/4 inches deep (fig. 1).
- Size 2 - 17-13/16 by 11-7/8 inches top outside by 2-1/4 inches deep (fig. 2).
- Size 3 - 23-7/16 by 13-7/16 inches top inside by 3-1/2 inches deep (fig. 3).
- Size 4 - 24 by 18 inches top outside by 4-1/2 inches deep, without clips (fig. 4).
- Size 5 - 24 by 18 inches top outside by 4-1/2 inches deep, with clips (fig. 5).

Type II - Pan, baking, sheet (fig. 6).

- Size 1 - 25-1/8 by 17-1/8 inches top inside by 1 inch deep.
- Size 2 - 12-1/2 by 9 inches top inside by 1 inch deep.

Type III - Pan, cake.

- Style A - Round, 9-inch diameter, 1-1/2 inches deep (fig. 7).
- Style B - Rectangular, 21-1/2 by 13-3/4 inches top inside by 1-3/4 inches deep (fig. 8).

Type IV - Pan, muffin, 12 cup (fig. 9).

- Style A - Lock-seamed.
- Style B - One piece.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.

Type V - Pan, pie, 9-inch diameter, 1-1/4 inches deep (fig. 10).

Style A - Reusable.
Style B - Disposable.

Type VI - Dishpan (fig. 11).

Size 1 - 14-quart.
Size 2 - 21-quart.

Type VII - Saucepan.

Style A - Deep (fig. 12).

Size 1 - 1-1/2-quart.
Size 2 - 2-1/2-quart.
Size 3 - 4-1/2-quart.
Size 4 - 8-1/2-quart.

Style B - Tapered side (fig. 13).

Size 1 - 1-1/2-quart.
Size 2 - 2-3/4-quart.
Size 3 - 3-3/4-quart.

Type VIII - Pan, pudding (fig. 14).

Size 1 - 1-quart.
Size 2 - 3-quart.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, or request for proposal form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-A-200/9 - Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire, Extruded, 6063.
QQ-A-225/2 - Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn, or Cold Finished, 3003.
QQ-A-225/7 - Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn, or Cold Finished 5052.
QQ-A-225/8 - Aluminum Alloy Bar, Rod, Wire, and Special Shapes; Rolled, Drawn, or Cold Finished, 6061.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

QQ-A-250/1 - Aluminum Alloy 1100, Plate and Sheet.
QQ-A-250/2 - Aluminum Alloy 3003, Plate and Sheet.
QQ-A-250/8 - Aluminum Alloy, 5052, Plate and Sheet.
QQ-S-766 - Steel Plate, Sheet, and Strip, Corrosion-Resisting.
QQ-W-423 - Wire, Steel, Corrosion-Resisting.
PPP-B-636 - Box, Fiberboard.
PPP-A-1182 - Aluminumware: Bakeshop and Kitchen Packaging, Packing and Marking Of.

Federal Standard:

Fed. Test Method Std. No. 151 - Metals, Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-A-148 - Aluminum, Foil.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-147 - Palletized and Containerized Unit Loads, 40" X 48" Pallets, Skids, Runners, or Pallet Type Base.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Sanitation Foundation (NSF) Publications:

Standard No. 2 - Food Service Equipment.
Listing of Food Service Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, P.O. Box 1468, Ann Arbor, Michigan 48106.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2) before production is commenced, a preproduction sample of the aluminum ware being procured under this specification shall be submitted or made available to the contracting officer or his authorized representative for approval, in accordance with 4.2. Approval of the preproduction sample authorizes commencement of production but does not relieve the supplier of responsibility for compliance with the detailed provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items. Whenever a material, design, or construction change or deviation is made to the aluminum pans after approval of the preproduction sample, the Government shall withhold acceptance of subsequent aluminum pans incorporating those changes until a sample containing changes or deviations has been inspected and approved in accordance with 4.2; or the contracting officer has given written approval based on the evidence furnished that the changes or deviations made do not adversely affect the design and performance of the aluminum pans. The preproduction unit shall be kept available during entire production and may be furnished as the last unit of the contract. However, before shipment the preproduction unit shall be reworked to meet all requirements of this specification.

3.2 Standard product. The aluminumware delivered under this specification shall be the manufacturer's current standard products, except for any changes necessary to comply with specification requirements.

3.3 Standard compliance. Aluminumware covered by this specification, except type IV, styles A and B, shall conform to the applicable requirements of NSF Standard No. 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.

3.3.1 NSF certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the aluminumware he proposes to furnish under this specification meets the applicable requirements of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished aluminumware shall be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment or

(2) A certification for the aluminumware issued by NSF under their special one-time contract evaluation/certification service shall be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment, or

(3) A certified test report from a recognized independent testing laborator acceptable to the medical authority functioning in advisory capacity to the preparing agency of the specification indicating that the aluminumware has been tested and conforms to NSF Standard No. 2, shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to commencing production.

3.4 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer of the aluminumware provided the completed items comply with all provisions of this specification.

3.4.1 Aluminum alloy sheet and foil.

3.4.1.1 Alloy 5052. Aluminum alloy 5052 sheet shall conform to QQ-A-250/8.

3.4.1.2 Alloy 3003. Aluminum alloy 3003 sheet shall conform to QQ-A-250/2. Aluminum alloy foil shall conform to MIL-A-148 except that the chemical composition shall be in accordance with QQ-A-250/2.

3.4.1.3 Alloy 3004. Aluminum alloy 3004 sheet shall have the standard commercial chemical composition (see 4.3.1.1).

3.4.1.4 Aluminum alloy 1100. Aluminum alloy 1100 sheet shall conform to QQ-A-250/1.

3.4.2 Aluminum bar, rod, and wire.

3.4.2.1 Alloy 5052. Rolled or drawn aluminum alloy 5052 bar, rod, and wire shall conform to QQ-A-225/7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.2.2. Alloy 6061. Rolled or drawn aluminum alloy 6061 bar, rod, and wire shall conform to QQ-A-225/8.

3.4.2.3 Alloy 3003. Rolled or drawn aluminum alloy 3003 bar, rod, and wire shall conform to QQ-A-225/2.

3.4.2.4 Alloy 6063. Extruded aluminum alloy 6063 bar, rod, and wire shall conform to QQ-A-200/9.

3.4.3 Corrosion-resisting steel.

3.4.3.1 Sheet. Corrosion-resisting steel sheet shall conform to class 302, 304, or 430 of QQ-S-766.

3.4.3.2 Wire. Corrosion-resisting steel wire shall conform to composition 302, 304, or 430 of QQ-W-423.

3.5 Construction. Figures shown herein are illustrative only, and are not intended to preclude aluminumware otherwise conforming to specification requirements.

3.5.1 Metal thickness. Unless otherwise specified herein,metal thicknesses and diameters shall be thickness or diameter after fabrication. A five percent minus tolerance is allowable and material having metal thicknesses and diameters greater than that specified herein are acceptable. Thickness dimensions specified hereinafter shall be the sidewall or bottom thickness of the aluminumware and not the bead thickness or the thickness of the curved section where the sidewall meets the bottom, except the thickness at the curved section shall be not less than the sidewall thickness.

3.5.2 Handles. Loop handles shall have a minimum width of 4 inches and a minimum clearance of one inch from the body of the aluminumware. All handles shall be formed to a shape or contour to provide a good handgrip and, unless otherwise specified herein, shall be either riveted or welded to the utensil. There shall be no failure of rivets or welds or permanent deformation of the handles, when the aluminumware is tested as specified in 4.4.1.

3.5.3 Capacities. A minus tolerance of 5 percent and a plus tolerance of 10 percent are applicable to capacities specified for types VI, VII, and VIII items. (see 4.4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.5.4 Rivets. The rivets used shall be brazier (low profile) head rivets drawn tight with smooth rounded heads on both sides and shall not be split.

3.5.5 Welds. Welds shall be free from porosity, cracks, or incomplete fusion and shall be ground and dressed.

3.6 Finish. The finish of all aluminumware, except type IV, styles A and B shall conform to NSF Standard No. 2. The finish for type IV, styles A and B shall be in accordance with the manufacturer's current standard commercial practice.

3.7 Marking for identification. The aluminumware shall be plainly and permanently marked with the manufacturer's name, trade name, or trademark of such known character that the source of manufacture may be determined. Capacities shall be legibly and permanently marked on types VI, VII, and VIII items.

3.8 Detailed requirements.

3.8.1 Type I, pan, baking and roasting.

3.8.1.1 Size 1 (figure 1). The size 1 baking and roasting pan body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 and shall conform to the requirements of table I.

3.8.1.1.1 Handles. The pan shall be fitted with two drop-chest type handles having a diameter of 0.162 inch. Each handle shall be formed from a single piece of corrosion-resisting steel wire specified in 3.4.3.2 or tinned steel wire and set into an aluminum alloy clip. The clip shall be secured to the pan body by spot welding or riveting.

3.8.1.2 Size 2(figure 2). The size 2 baking and roasting pan body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3 and shall conform to the requirements of table I.

3.8.1.2.1 Handles. The pan shall be fitted with two drop-chest type handles having a diameter of 0.162 inch with each handle formed from a single piece of corrosion-resisting steel wire specified in 3.4.3.2 or tinned steel wire and set into an aluminum alloy clip. Each clip shall be secured to the pan body by not less than three spot welds or two aluminum alloy rivets.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.

3.8.1.3 Size 3 (figure 3). The size 3 baking and roasting pan body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3 and shall conform to the requirements of table I. The sides shall be tapered for nesting.

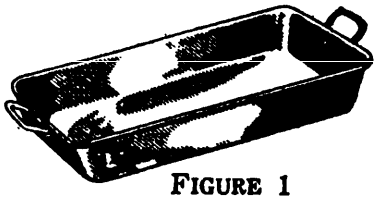


FIGURE 1




FIGURE 2



FIGURE 3

3.8.1.3.1 Handles. The pan shall be fitted with two drop-chest type handles having a diameter of 0.3065 inch. Each handle shall be formed from a single piece of corrosion-resisting steel wire specified in 3.4.3.2 or tinned steel wire and set into an aluminum alloy clip. Each clip shall be secured to the pan body by not less than six spot welds or four aluminum alloy rivets.

TABLE I. Pan, baking and roasting, sizes 1, 2, and 3

Size	Top inside (± 1/8 inch)	Depth inside (± 1/8 inch)	Bottom outside (± 1/8 inch)	Thickness
	Inches	Inches	Inches	Inch
1.	13-1/4 by 9-1/4	2-1/4	-	0.040
2.	*17-13/16 by 11-7/8	2-1/4	16 by 10-1/8	0.064
3.	23-7/16 by 13-7/16	3-1/2	-	0.081

* Top outside ± 1/8 inch.

TABLE IA. Pan, baking and roasting, sizes 4 and 5

Size	Top outside (+ 1/4, -1/16 inch)	Depth inside (+ 1/4, -1/16 inch)	Thickness
	Inches	Inches	Inch
4.	24 by 18	4-1/2	0.102
5.	24 by 18	4-1/2	0.102

3.8.1.4 Size 4 (figure 4). The size 4 baking and roasting pan shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3 and shall conform to the requirements of table IA. The size 4 pan can be used separately or in combination as a double roaster with the size 5 pan specified in 3.8.1.5; with the size 4 pan used as the top section of the size 5 pan used as the bottom section.

3.8.1.4.1 Handles. The pan shall be fitted with two drop-chest type handles having a diameter of 0.3065 inch. Each handle shall be formed from a single piece of corrosion-resisting steel wire specified in 3.4.3.2 or tinned steel wire and set into an aluminum alloy clip. The clip shall be secured to the pan by not less than six spot welds or four aluminum alloy rivets in each clip.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.

3.8.1.4.2 Straps. The pan shall be reinforced with two 0.0937 inch thick by 1 inch wide corrosion-resisting steel or tinned steel straps, extending lengthwise along the outside bottom and up the end walls to a point approximately one half inch below the bead. Each strap shall be securely attached by two aluminum alloy rivets at each end of each strap.

3.8.1.5 Size 5 (figure 5). The size 5 baking and roasting pan shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3. The pan shall conform to the requirements of table IA. The size 5 pan can be used separately or in combination as a double roaster with the size 4 pan specified in 3.8.1.4, with the size 4 pan as the top section and the size 5 as the bottom section. The top edge of the size 5 pan shall be finished with half-round open bead which may be turned up to form a trough.

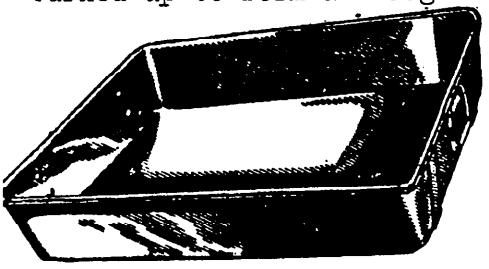


FIGURE 4

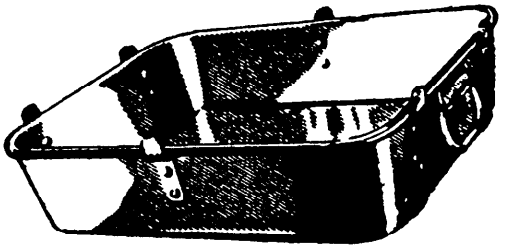


FIGURE 5

3.8.1.5.1 Handles. The pan shall be fitted with two drop-chest type handles having a diameter of 0.3065 inch. Each handle shall be formed from a single piece of corrosion-resisting steel wire specified in 3.4.3.2 or tinned steel wire and set into an aluminum alloy clip. Each clip shall be secured to the pan by not less than six spot welds or four aluminum alloy rivets.

3.8.1.5.2 Straps. The pan shall be reinforced with two 0.0937 inch thick by 1 inch wide straps of corrosion-resisting steel specified in 3.4.3.1 or tinned steel. The straps shall extend lengthwise along the outside bottom and up the end walls to a point approximately 1/2 inch above the bead. Each strap shall be securely attached by two aluminum alloy rivets in each end of each strap. When the bead on the pan body is turned up to form a trough, the straps shall extend lengthwise across the outside bottom and up the end walls to a point approximately 1/2 inch below the bead.

3.8.1.5.3 Clips. The pan shall be fitted with two 0.0937 inch thick by 1 inch wide clips of corrosion-resisting steel specified in 3.4.3.1 or tinned steel. The clips shall extend approximately 1/2 inch above the pan to prevent the size 4 pan from sliding off when used as a cover. The clips shall be located equidistant from each end on the sidewall of the pan, and securely attached to the pan by two aluminum alloy rivets in each clip. When the bead on the pan body is turned up to form a trough, the clips are not necessary but the bead shall be of a size to hold and prevent the size 4 pan from sliding off, when used as a cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.8.2 Type II, pan, baking, sheet (figure 6).



FIGURE 6

3.8.2.1 Size 1 and 2. The body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3 and shall conform to the requirements of table II.

TABLE II. Pan, baking, sheet

Size	Top inside (± 1/8 inch)	Depth inside (± 1/8 inch)	Thickness --
	Inches	Inch	Inch
1	25-1/8 by 17-1/8	1	0.081
2	12-1/2 by 9	1	0.051

3.8.3 Type III, pan, cake.

3.8.3.1 Style A, round (figure 7). The round cake pan shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3 and shall conform to the requirements of table III.

3.8.3.2 Style B, rectangular (figure 8). The rectangular cake pan shall be formed without seams from a single piece of aluminum alloy as specified in 3.4.1.2 or 3.4.1.3 and shall conform to the requirements of table III.



FIGURE 7




FIGURE 8

TABLE III. Pan, cake

Style	Top inside (± 1/8 inch)	Depth inside (± 1/8 inch)	Thickness --
	Inches	Inches	Inch
A	9 (diameter)	1-1/2	0.032
B	21-1/2 by 13-3/4	1-3/4	0.071

3.8.4 Type IV, muffin pans (figure 9).

3.8.4.1 Style A, lock seamed. Conformance to the requirements of NSF Standard No. 2 as applicable to 3.3 is not required for the muffin pan. The style A muffin pan shall consist of a rack into which 12 cups are individually lock seamed. The rack shall be made from a single piece of aluminum specified in 3.4.1.2 or 3.4.1.4 and shall be 0.040 inch thick with the rack edges finished with a closed bead. The rack shall have 12 round flanged openings, with edges embossed and flared into which individual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

cups shall be lock-seamed in place. Each cup shall be formed without seams from a single piece of aluminum specified in 3.4.1.2 or 3.4.1.4 and shall be 0.040 inch thick. The cups shall be beaded to fit over the edge of the openings in the rack. The rack and cups shall conform to the requirements of table IV.

TABLE IV. Style A, pan, muffin

Overall rack dimensions	Inside top diameter of cup (± 1/8 inch)	Inside bottom diameter of cup (± 1/8 inch)	Inside depth of cup (± 1/8 inch)
Inches	Inches	Inches	Inches
14-3/4 by 11-3/16	2-13/16	2	1-1/4

3.8.4.2 Style B, one piece. The muffin pan shall be constructed with 12 cups. The style B muffin pan shall be 0.040 inch thick and shall be made without seams from a single piece of aluminum alloy specified in 3.4.1.2. The pan shall conform to the requirements of table IVA. The outside edges shall have a half round open bead, a tight flat bead, or a tight round bead which may be beaded over a 0.1483 inch diameter corrosion-resisting steel wire specified in 3.4.3.2 or a tinned steel wire.

TABLE IVA. Style B, pan, muffin

Overall rack dimensions (± 1/8 inch)	Inside top diameter of cup (± 1/8 inch)	Inside bottom diameter of cup (± 1/8 inch)	Inside depth (± 1/8 inch)
Inches	Inches	Inches	Inches
12-7/8 by 9-7/8	2-13/16	2	1-1/4

3.8.5 Pan, pie (figure 10).

3.8.5.1 Style A, reusable. The style A pie pan shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 and shall conform to the requirements of table V. The top edge shall be formed into a horizontal flange.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE V. Style A, pan, pie

Top outside diameter (± 1/8 inch)	Top inside diameter (± 1/8 inch)	Thickness	Bottom outside diameter (± 1/8 inch)	Vertical depth to flange (± 1/8 inch)
Inches	Inches	Inch	Inches	Inches
9-1/2	9	0.025	7-1/4	1-1/4

3.8.5.2 Style B, disposable. The style B pie pan shall be formed without seams from one piece of aluminum alloy foil specified in 3.4.1.2 and shall conform to the requirements of table VA. The top edge shall be formed flat with a full curled rim. Wrinkled or pleated foil will be permitted on the slanted side and the flat edge of the pan.

TABLE VA. Style B, pan, pie

Top outside diameter (± 1/64 inch)	Top inside diameter (+ 0 - 1/8 inch)	Thickness	Bottom outside diameter (+ 1/8 inch - 1/16 inch)	Vertical depth to flange (± 1/8 inch)
Inches	Inches	Inch	Inches	Inches
9-5/8	8-7/8	0.0045 to 0.0050	7	1-1/4

3.8.6 Type VI, dishpans (figure 11).

3.8.6.1 Size 1. The size 1 dishpan shall be 0.040 inch thick and shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2. The dishpan shall have a capacity of 14 quarts. The pan shall be provided with two loop handles or be flanged for handling. Loop handles shall have a diameter of 0.2437 inch, and shall be made from corrosion-resisting steel wire specified in 3.4.3.2 or tinned steel wire. Loop handles shall be located at points diametrically opposite each other and securely attached to the pan with four aluminum alloy rivets for each handle. When handles are not provided, a hole not less than 5/16 inch diameter shall be provided in the top edge for hanging.




FIGURE 9



FIGURE 10

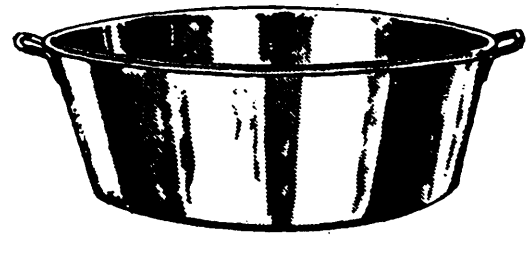


FIGURE 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.8.6.2 Size 2. The size 2 dishpan shall be of 21 quart capacity. The dishpan shall be formed without seams from a single piece of aluminum specified in 3.4.1.1, 3.4.1.2, or 3.4.1.3 and shall have a thickness of 0.090 inch.

3.8.6.2.1 Handles. The pan shall be fitted with two tinned steel loop handles, two corrosion-resisting steel wire loop handles, or two aluminum alloy loop handles. All steel handles shall be 0.4305 inch diameter and the aluminum alloy handles shall be 0.4375 inch diameter. Corrosion-resisting steel handles shall be made of wire specified in 3.4.3.2. The aluminum alloy shall be as specified in 3.4.2.1, 3.4.2.2, or 3.4.2.3. The handles shall be located at points diametrically opposite each other and attached to the pan with not less than four aluminum alloy rivets or four spot welds for each handle.

3.8.7 Type VII, Saucepan.

3.8.7.1 Style A, deep (figure 12). The style A saucepan shall be 1-1/2-, 2-1/2-, 4-1/2-, or 8-1/2-quart capacity, and shall conform to requirements of table VI. The body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3. The body thickness of the 8-1/2 quart capacity pan shall be 0.187 inch thick at the bottom and at the wall at the top, and the sidewall thickness may gradually taper to not less than 0.109 inch.

TABLE VI. Style A saucepans

Size	Top inside diameter maximum	Thickness of cover	Thickness
	Inches	Inch	Inch
1½	6-1/8	0.051	0.125
2½	7-1/8	0.051	0.125
4½	8-1/8	0.051	0.144
8½	12-1/2	0.064	0.187 bottom & top wall 0.109 sidewall (min.)

3.8.7.1.1 Handle. The pans shall be fitted with a tinned or nickel plated malleable iron long handle or a corrosion-resisting steel long handle securely attached by not less than three aluminum alloy rivets.

3.8.7.1.2 Cover. When specified (see 6.2) covers shall be provided for the saucepans. The cover body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3. Material thickness shall be as specified in table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.8.7.1.2.1 Cover handle. The cover shall be fitted with a handle formed from a single piece of aluminum alloy specified in 3.4.2.3 or tinned steel. Aluminum alloy handles for all size pans shall be 0.064 inch thick by not less than 1/2 inch wide. Tinned steel handles for all size pans shall be 0.058 inch thick by not less than 1/2 inch wide.

3.8.7.2 Style B, tapered side (figure 13). The style B saucepan shall be 1-1/2-, 2-3/4-, or 3-3/4-quart capacity and shall conform to the requirements of table VIA. The body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.1, 3.4.1.2 or 3.4.1.3.

TABLE VIA. Style B, saucepans

SIZE	Top inside diameter maximum	Thickness of cover	Thickness
	Inches	Inch	Inch
1-1/2	6-1/8	0.051	0.081
2-3/4	7-7/8	0.051	0.081
3-3/4	8-7/8	0.051	0.081

3.8.7.2.1 Handle. The pans shall be fitted with a tinned or nickel plated malleable iron long handle or a corrosion-resisting steel long handle securely attached by not less than three aluminum alloy rivets.

3.8.7.2.2 Cover. When specified (see 6.2), covers shall be provided for the saucepans. The cover body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.2 or 3.4.1.3.

3.8.7.2.2.1 Cover handle. The cover shall be fitted with a handle formed from a single piece of aluminum alloy specified in 3.4.2.3 or 3.4.2.4 or tinned steel. The aluminum alloy handles shall be 0.064 inch thick by not less than 1/2 inch wide. Tinned steel handles shall be 0.058 inch thick by not less than 1/2 inch wide.

3.8.8 Type VIII, pans, pudding (figure 14). The size 1 and 2 pudding pans shall be of 1- and 3-quart capacity, respectively and shall conform to the requirements of table VII. The body shall be formed without seams from a single piece of aluminum alloy specified in 3.4.1.1. The sidewall shall be tapered. The bottom of the pan shall be flat.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.




FIGURE 12




FIGURE 13



FIGURE 14

TABLE VII. Pans, pudding

Size	Top inside diameter (± 1/8-inch)	Top outside diameter (maximum)	Inside depth (± 1/8-inch)	Thickness of sheet
	Inches	Inches	Inches	Inch
1	7-1/4	8-1/4	2-1/4	0.020
2	9-7/8	10-3/8	3-1/4	0.020

3.9 Workmanship. All sharp edges, slivers, or burrs shall be removed from the aluminumware together with all deep scratches and tool marks on all surfaces.

4. QUALITY ASSURANCE PROVISIONS

4.1. Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for the visual defects in table VIII and for dimensions specified herein, and tested as specified in 4.4.1 and 4.4.2. Failure to pass any test shall be cause for rejection of the preproduction sample. The presence of any defects listed in table VIII or any dimension not within specified requirements shall be cause for rejection of the preproduction sample.

4.3 Sampling for inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, standards, and drawings unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.3.1.1 Aluminum material testing. The 3004 aluminum alloy shall be tested to determine compliance with the chemical composition requirements of 3.4.1.3 in accordance with method 111 or 112 of Fed. Test Method Std. No. 151.

4.3.2 End product inspection. The inspection lot shall consist of all items of one type, style, and size offered for inspection at the same time. The sample unit shall be one completely finished item of aluminumware.

4.3.2.1 Visual examination. Examination shall be made of the end item for the defects in table VIII. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE VIII. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish	Not finished as specified	X	
	Area of corrosion	X	
	Stained or discolored		X
Construction and workmanship (general)	Deep scratch or tool mark on interior surface, clearly noticeable	X	
	Scratched, pitted, or tool mark on exterior surfaces		X
	Any sharp edge, sliver, or burr	X	
	Any part missing, or not specified type	X	
	Any component fractured, split, buckled, bent, punctured, or otherwise impaired	X	
	Operation omitted or not properly performed	X	
Handles	Not attached as specified	X	
Welding (where applicable)	Missing, incomplete, burnholes, porous, cracked, fractured, or not fused	X	
	Not ground and dressed		X
Beading (where required)	Omitted or not as specified	X	
Marking	Missing, not legible, incorrect		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.

4.3.2.2 Dimensional examination. An examination shall be made of the pans for dimensional defects. Any dimension not within specified requirements shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.2.3 End product testing. Items equipped with handles shall be tested as specified in 4.4.1. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units. When no preproduction sample is required, one production unit from the initial lot shall be tested as specified in 4.4.2. Any nonconformance shall be cause for rejection of the lot.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that preparation for delivery as specified in section 5 of the specification is in conformance with PPP-A-1182.

4.3.4 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be scored as specified in table IX. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE IX. Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Not as specified
	Pallet pattern not as specified
	Interlocking of loads not as specified
	Load not bonded with required straps specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

4.3.5 Code and standards compliance. Proof of compliance with the requirements of NSF, as applicable to 3.3, shall be available to the Government representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.4 Tests.

4.4.1 Handles. The item shall be loaded with weights equivalent to 1-1/4 times the weight of the water capacity of the item and lifted by the handles to a position of normal use not less than 30 seconds and then examined. Nonconformance to 3.5.2 shall constitute failure of this test.

4.4.2 Capacity. The type VI, VII, and VIII items shall be filled to capacity with water and the volume of water measured. Nonconformance to 3.5.3 shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Levels A, B, and C. Packaging, packing, and marking for each level of protection shall be in accordance with the applicable requirements of PPP-A-1182 (see 6.2), except that for level A packing, the shipping container shall be V2s of PPP-B-636.

5.2 Palletization (Military requirements). Aluminum pans packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K&L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES.

6.1 Intended use. The aluminum pans covered herein are intended for domestic and institutional use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, style, and size of aluminumware required (see 1.2).
(c) First article. When a preproduction sample is required (see 3.1).
(d) When covers are required for saucepans (see 3.8.7.1.2 and 3.8.7.2.2).
(e) Selection of applicable levels of packaging and packing (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - SA, YD

User activity:

Navy - MC

Preparing activity:

Army - GL

CIVIL AGENCY INTEREST:

GSA - FSS
AGR
VA

Project No. 7330-0273

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

RR-P-54B - PANS, ALUMINUM ALLOY

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD, FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.