RR-T-25C
July 21, 1989
SUPERSEDING
RR-T-25B
December 29, 1984

FEDERAL SPECIFICATION

TABLE, STEAM-JACKETED KETTLE

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers free standing and wall mounted corrosion-resisting steel tables for mounting the table tilting model kettles covered by RR-K-195.

1.2 Classification.

1.2.1 Styles and sizes. The tables are of the following styles and sizes as specified (see 6.2).

Style 1 - Free standing
Style 2 - Wall mounted

Size 1 2 - Kettle table 1/
Size 2 3 - Kettle table 1/

1/ Specify whether table is for 2-1/2, 5, or 7-1/2 gallon kettles or any combination thereof, and desired length of table. (Consult RR-K-195 for kettle dimensions).

1.3 Part or identifying number (PIN). The PIN is definitive to identify each item covered by selecting from the options available (see 1.2). The part number is formatted and designated as follows:

	RR-T-25	X	X	X.X
Specification number				
Style designator				
Size designator				
Kettle capacity designator				

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Style Table	Designator
1	1
2	2
Size Table	
1	1
2	2
Kettle Capacity (Gallons)	
2 1/2	2.5
5	5.0
7 1/2	7.5

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications

RR-K-195 - Kettles, Steam-Jacketed (Stainless Steel, Steam Heated
PPP-B-636 - Box, Shipping, Fiberboard

Federal Standard

FED-STD-123 - Marking for Domestic Shipment (Civilian Agencies)

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards, and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents, and the Index of Federal Specifications, Standards, and Commercial Item Descriptions from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Military Standards

MIL-STD-105 - Sampling Procedures and lables for Inspection by Attributes
MIL-STD-130 - Identification Marking of U.S. Military Property
MIL-STD-2073-1 - DoD Materiel Procedures for Development and Application of Packaging Requirements

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal will apply.

American Society for Testing and Materials (ASTM)

ASTM A 123 - Zinc (Hot-Dip Galvanized) Castings on Iron and Steel Products (DoD adopted)
ASTM A 167 - Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet, and Strip (DoD adopted)
ASTM A 176 - Stainless and Heat Resisting Chromium Steel Plate, Sheet, and Strip (DoD adopted)
ASTM D 3951 - Commercial packaging, practice for

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

National Sanitation Foundation (NSF)

NSF Standard No. 2 - Food Service Equipment
NSF Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, 3475 Plymouth Road, P. O. Box 1468, Ann Arbor, MI 48106.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specifications sheets or MS standards), the text of this specification takes precedence. Nothing in this specification supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish one table of each classification included in the contract for first article inspection and approval (see 4.2.1 and 6.4.1).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the currentversion before use.

3.2 Standard commercial product. The tables shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the tables being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 NSF Standard. Tables shall conform to the applicable requirements of NSF Standard No. 2.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification.

3.4.1 Corrosion-resistant steel. Corrosion-resistant steel used for food-contact surface shall conform to any of the type 300 series specified in ASTM A 167. When corrosion-resistant steel is used for other surfaces, the chemical compositions of any of the type 300 series of ASTM A 167, or any of the type 400 series of ASTM A 176 shall be used.

3.5 Design. The table exterior shall be corrosion-resistant steel as specified in 3.4.1, and the frame shall be carbon steel (see figure 1). The size 1 table shall be designed for holding two kettles of the capacity specified and the size 2 table shall be designed to hold three kettles of the capacity specified (see 6.2). Style 1 tables shall be provided with legs and style 2 tables shall have provisions for wall mounting without legs in accordance with figure 1. The tables shall be of the step design and shall have a top surface for mounting the kettles and a lower surface for supporting a vessel to receive the liquid or food when the kettle is tilted. Openings in the top for mounting kettle supports and for connecting steam and condensate lines, shall be provided.

3.6 Construction. Tables shall be constructed as specified herein and as shown in figure 1. Style 1 and style 2 tables shall be of angle-frame construction enclosed by an outer skin of corrosion-resistant steel (thickness allowed to vary from 0.0595 "to 0.0610" (1.51 millimeters (mm) to 1.55 mm), as specified in 3.4.1. Frame angles shall be carbon steel finished

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

as specified in 3.9. The corrosion-resistant steel top shall be either tack-welded to the frame or secured with studs welded to the top skin and bolted to the framework. The tables shall have a continuous raised lip on all outer edges. Style 1 tables shall have a skirt on all four sides and style 2 tables shall have a skirt on the front and ends. The length of the tables shall be as specified (see 6.2) to mount the required size and quantity of kettles specified (see 1.2) +5 inches (127 mm). A carbon steel channel extending the full length of the table and welded at each end to the frame shall be provided to support the kettles. The attachment holes for the kettles shall be located such that all kettles pour into the drain trough when tilted 90° from the vertical position.

3.6.1 Drain trough. The lower surface of the table top shall be provided with a corrosion-resistant steel drain trough for collecting and draining spillage (see figure 1). The drain trough shall be pitched to allow complete drainage and shall have provisions for connecting drainage piping. The trough shall be provided with two or more removable louvered nonsplash covers fabricated of corrosion-resistant steel specified in 3.4.1. The top edge of the covers shall be flush with the table top and edges of slots or louvers in covers shall be smoothly finished. The covers shall be provided with lift-out holes for removal from the trough.

3.6.2 Legs. Style 1 tables only shall be provided with corrosion-resistant steel adjustable leg assemblies with bullet-type feet. Legs shall be fabricated of 1-5/8 inch (41.3 mm) tube (16 ga. wall thickness) and shall be removable from the under-table gussets. Tables shall be provided with four leg assemblies (one at each corner). Legs shall provide a table height of 31 inches (787.4 mm), ±1/4 inch (6.4 mm) when the bullet feet are screwed all the way in. In lieu of the leg gussets shown on the drawing, the supplier may provide a corrosion-resistant steel threaded flange welded to the frame.

3.6.3 Mounting brackets. When specified (see 6.2), style 2 tables shall be provided with structural steel mounting brackets. The vertical members of the brackets shall be designed for mounting in the kitchen wall and welded to the horizontal bracket-members in the floor. The channel brackets shown in figure 1 are illustrative only and not restrictive.

3.7 Welding and brazing. Welding and brazing shall be complete, with no evidence of burn holes, cracks, severe undercuts, fractures, or porous areas. Welding and brazing shall be smooth and uniform, and there shall be no slag inclusion, or scale and flux deposits. All welding of corrosion-resistant steel shall be accomplished with welding rods having corrosion-resistant qualities equal to or better than the basic metal.

3.8 Identification marking. Identification shall be permanently and legibly marked directly on the table or on a corrosion-resisting metal plate securely attached to the table at the source of manufacturer. Identification shall include the manufacturer's model and serial number, name and trademark to be readily identifiable to the manufacturer. Marking shall be applied in accordance with MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.9 Finish. All finished surfaces shall conform to NSF Standard No. 2 and shall be smooth, uniform, and free of permanent soil or corrosion. Frame angle irons and channels shall be hot-dip galvanized and tested in accordance with ASTM A 123. The zinc coating shall be not less than as indicated per table 1 in ASTM A 123.

3.10 Workmanship.

3.10.1 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.10.2 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Material inspection. The contractor is responsible for insuring that supplies and materials are inspected for compliance with all the requirements specified herein and in applicable referenced documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.1.3 Standards compliance. The contractor shall make available to the contracting officer or his authorized representative evidence of compliance with the applicable standards cited in 3.3 and 3.4.1. The Government reserves the right to examine and test all tables to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one table when a first article is required (see 3.1 and 6.2). This inspection shall include the examination of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4, and the packaging inspection of 4.5. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one completely assembled table. All tables offered for delivery at one time shall be considered a lot for the purpose of inspection. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separated from new lots, and shall be clearly identified as reinspected lots (see 6.5).

4.4 Examination. Each sample table as defined in accordance with MIL-STD-105, shall be examined for defects listed in table I. Each attribute within each classification of multiple defects shall constitute one defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE 1. Classification of defects.

Classification	Defects	Requirement paragraph
Major:		
101	Table not proper classification.	1.2
102	Materials not as specified.	3.4
103	Corrosion-resistant steel not as specified	3.4.1
104	Design not as specified. No step design. Openings omitted, improperly assembled, or out of position.	3.5
105	Dimensions not as specified. (any dimension not within specified requirement shall constitute one defect).	3.6 and Figure 1
106	Construction not as specified. Steel top not as specified. Lip not as specified. Skirt not as specified. Improper length. Channel not as specified.	3.6
107	Drain trough not as specified. Not properly pitched. Improper provision for piping. Covers not as specified	3.6.1
108	Legs (for style 1 tables) not as specified	3.6.2
109	Mounting brackets (for style 2 tables) not as specified.	3.6.3
110	Welding not as specified.	3.7
111	Zinc coating finish not as specifiedness	3.9
112	Steel fabrication not of specified workmanship.	3.10.2
Minor:		
201	Nameplate missing, not securely affixed, or not corrosion-resisting material.	3.8
202	Marking missing, incomplete, or not legible.	3.8
203	Finish not smooth, uniform, or free of permanent soil or corrosion.	3.9
204	Threaded fasteners missing, broken, stripped, loose, or fractured.	3.10.1

4.5 Preparation for delivery inspection. An examination shall be made to determine compliance with the requirements of section 5. The sample unit shall be one unit prepared for shipment.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each table and components shall be packaged for mechanical and physical protection in a class weather-resistant fiberboard box conforming to PPP-B-636. Style 1 tables shall have the legs removed. Style 2 tables shall have wall-mounting brackets and bolts packaged within the unit container. The drain through covers shall be secured to prevent movement.

5.1.2 Commercial. Each table shall be packaged in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A and B. Packing shall be in accordance with the requirements of MIL-STD-2073-1, Appendix C, table VII, for the applicable level specified. Open crates shall not be used for level A packing.

5.2.2 Commercial. Tables shall be packed in accordance with ASTM D 3951.

5.3 Palletization. Material shall be palletized in accordance with MIL-STD-2073-1, Appendix F when the following criteria are met:

a. Load to consist of four or more unskidded containers; and,
b. Load shall utilize a minimum of 80 percent of the pallet base.

5.4 Marking.

5.3.1 Military agencies. Shipments to the Department of Defense shall be marked in accordance with the requirements of ASTM D 3951 or MIL-STD-2073-1 as applicable.

5.3.2 Civil agencies. Shipments to civil agencies shall be marked in accordance with FED-STD-123.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The tables covered by this specification are intended for use in kitchens of Federal civil agencies and military hospitals.

6.2 Acquisition requirements. Purchasers should all select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.
b. Style and size required, including capacity of each kettle and length of table (see 1.2.1, 3.5 and 3.6).
c. First article. When a preproduction sample is not required (see 3.1, 4.2.1, and 6.4.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.

d. When mounting brackets (style 2 tables only) are required (see 3.6.3 and 6.3).
e. Level of preservation and level of packing required (see 5.1 and 5.2).

6.3 Mounting bracket note. The contracting officer should determine that mounting brackets for style 2 tables, when procured separately, are designed for the end item table to be provided under this specification.

6.4 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/specific acquisition. to ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title
6.4.1, 6.4.2	DI-E-2121	Certificate of Compliance

The above DID's were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.4.1 NSF Certification. The supplier should submit satisfactory evidence to the contracting officer or his authorized representative that the table he purposes to furnish under this specification meets the applicable requirement of NSF Standard No. 2 as follows:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished table, should be submitted prior to approval of the preproduction sample, if one is submitted, or prior to approval of the first shipment or

(2) A certified test report from a recognized independent testing laboratory acceptable to the contracting officer with the advice of the Army Surgeoon General, indicating that the tables have been tested and conform to NSF Standard No. 2, should be submitted, or prior to commencing production.

6.4.2 Corrosion-Resistant Steel. Acceptable evidence of meeting the requirements of paragraph 3.4.1 is the receipt of the manufacturer's certificate of compliance stating that the corrosion-resistant steel used for food-contact surfaces conforms to the type 300 series specified in ASTM A 167.

6.5 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the currentversion before use.

The first article should consist to one table. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.6 SAMPLING PROCEDURES

6.6.1 Sampling for Examination. The recommended inspection level should be S-2 and the Acceptable Quality Level (AQL) should be 2.5 defects per hundred units (DHU) for major defects and 6.5 DHU for minor defects (see 4.3).

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodian:
Navy - YD

Review Activity:
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITIES:


GSA - FSS
VA - OSS

Preparing Activity:
Navy - YD

(Project 7320-N843)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

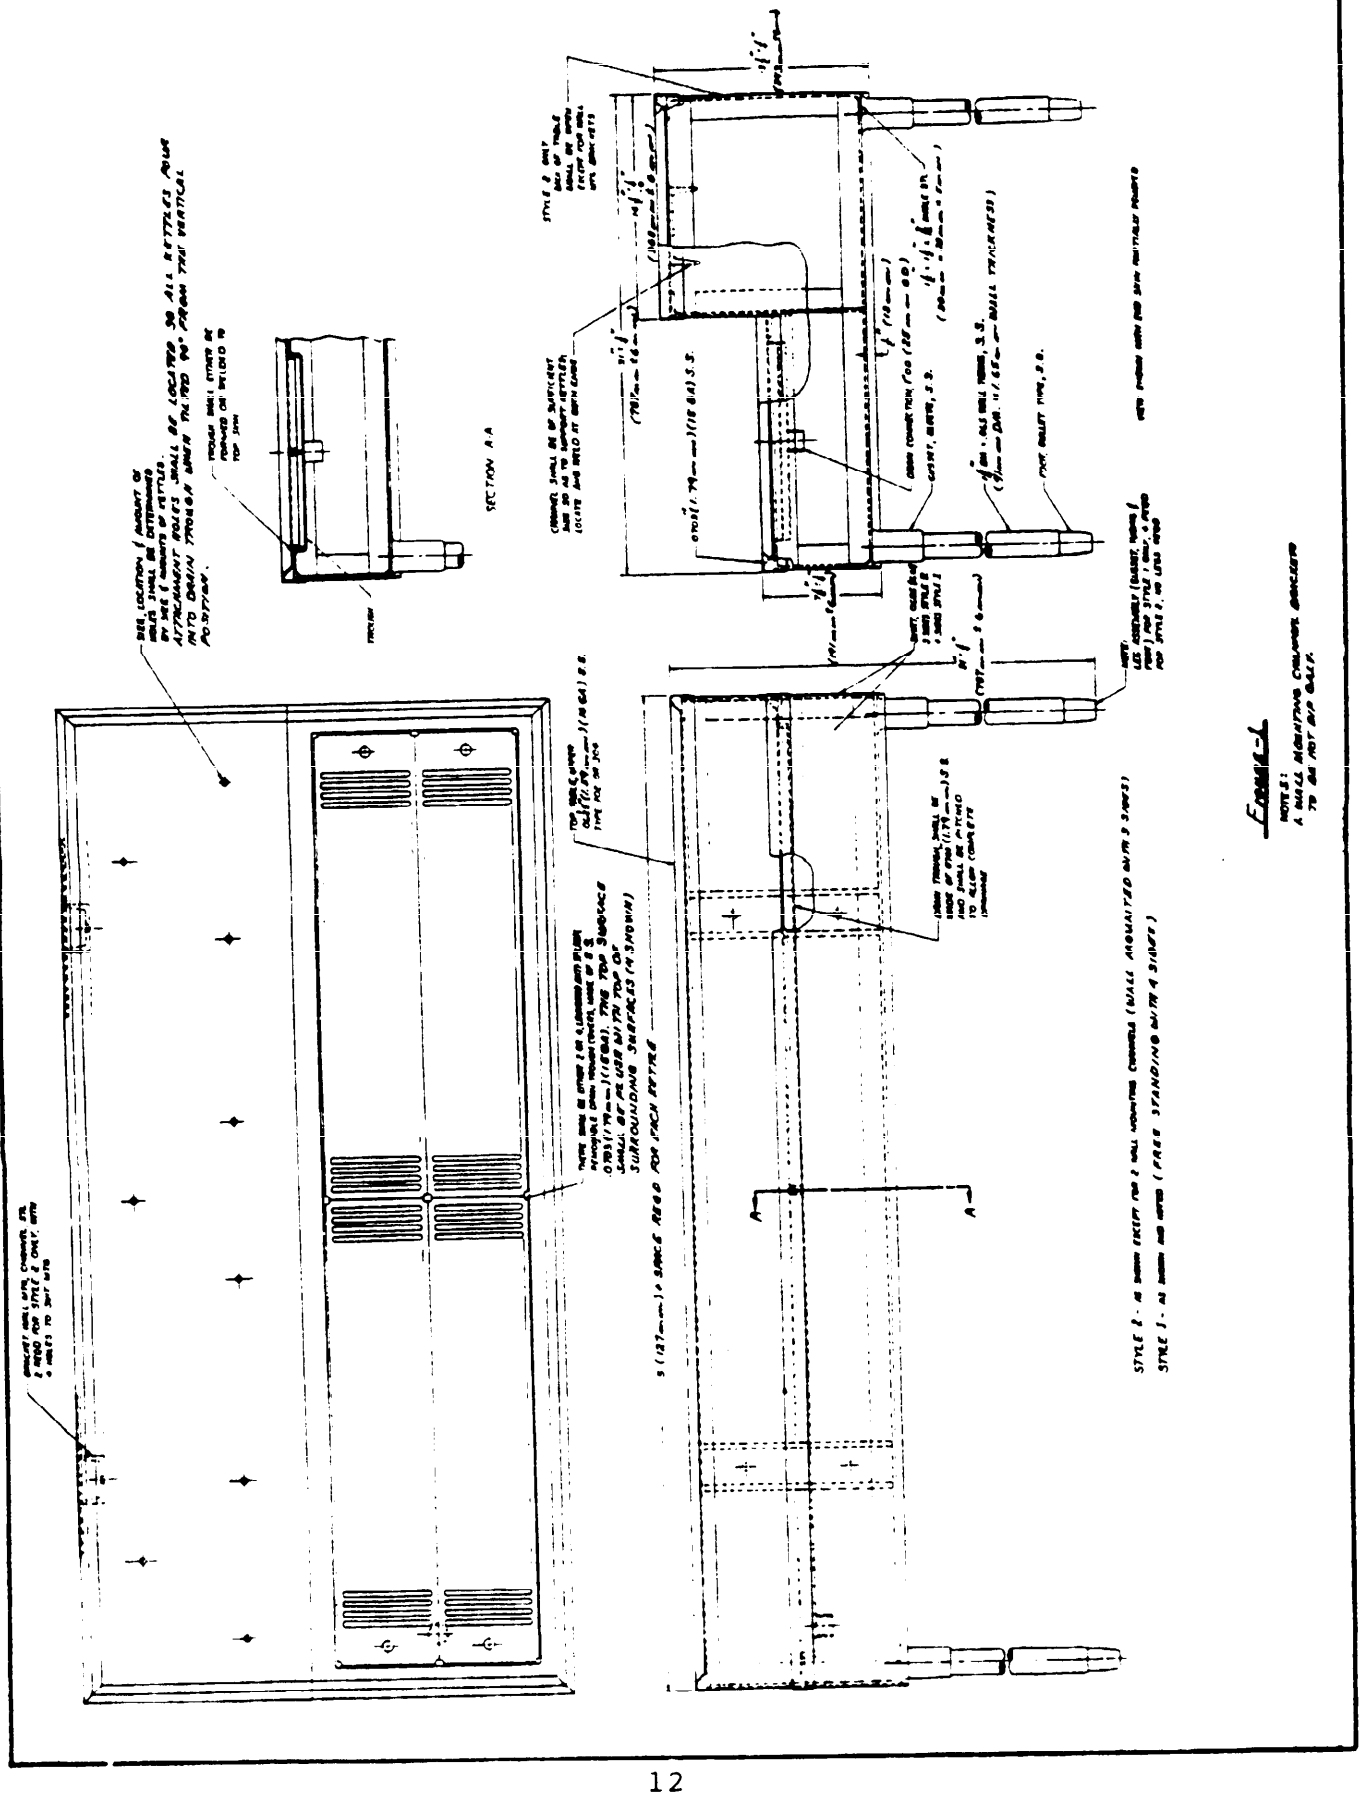

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

(FOLD DETACH THIS FOR

c. Reason/Rationale for Recommendation:

8. REMARKS

7a. NAME OF SUBMITTER (Last, First, MI) – Optional	b. WORK TELEPHONE NUMBER (Include Area Code) – Optional
c. MAILING ADDRESS (Street, City, State, ZIP Code) – Optional	8. DATE OF SUBMISSION (YYMMDD)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(FOLD OUT ALONG THIS LINE)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
RR-T-25C	TABLE, STEAM-JACKETED KETTLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION (Mark one)
b. ADDRESS (Street, City, State, ZIP Code)	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER (Specify):

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Commanding Officer (Code 156)
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Code 156
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.