RR-T-51D
May 23, 1972
SUPERSEDING
Fed. Spec. RR-T-51C
May 23, 1966

FEDERAL SPECIFICATION

TABLEWARE AND FLATWARE - SILVERPLATED

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers silverplated tableware (hollowware) and flatware of a grade equal to high-quality hotel and restaurant items.

1.2 Classification. Tableware and flatware shall be of the following types and items, as specified (see 6.2).

Type I - Tableware

Items:
1 - Bowl, food serving (figure 1)
2 - Bowl, sugar (figure 2)
3 - Caster, cruet (figure 3, 3A and 3B)
4 - Coffee pot, serving, 32-ounce (figure 4 and 4A)
5 - Dish, food serving, 8 inch diameter (figure 5)
6 - Dish, food serving rectangular (figure 6)
7 - Gravy boat (figure 7)
8 - Pitcher, cream 8-ounce (figure 8)
9 - Pitcher, cream 16-ounce (figure 9)
10 - Pitcher, syrup 9-ounce (figure 10)
11 - Pitcher, water 5-1/2 quart (figure 11)
12 - Platter, food serving (figure 12)
13 - Teapot, serving, 22-ounce (figure 13)
14 - Tray service, 12-inch (figure 14)
15 - Tray service, 18-inch (figure 15 and 15A)
16 - Tray, bread (figure 16 and 16A)
17 - Tureen, soup with cover, 64 ounce (figure 17)

Type II - Flatware

Items:
1 - Fork, dessert (figure 18)
2 - Fork, oyster (figure 19)

FSC 7340, 7350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3 - Fork, salad (figure 20)
4 - Fork, table (figure 21)
5 - Knife, dessert (figure 22)
6 - Knife, table (figure 23)
7 - Spoon, bouillon (figure 24)
8 - Spoon, demitasse (figure 25)
9 - Spoon, dessert (figure 26)
10 - Spoon, iced tea (figure 27)
11 - Spoon, soup (figure 28)
12 - Spoon, sugar (figure 29)
13 - Spoon, table (figure 30)
14 - Spoon, tea (figure 31)
15 - Ladle, gravy, table (figure 32)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-676 - Boxes, Setup.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Standards:

A 176 - Stainless and Heat-Resisting Chromium Steel Plate, Sheet, and Strip.
B 298 - Silver-Coated Soft or Annealed Copper Wire.
E 18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Material, Test for.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample for first article testing and approval (see 4.2, and 6.6).

3.2 Standard product. The plated items shall be the manufacturer's current, standard commercial product, except for any changes necessary to comply with specification requirements.

3.3 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer in commercial practice for high quality hotel and restaurant silver-plated flatware and holloware provided the completed items comply with all the provisions of this specification. Commercial tolerances are applicable to all material thicknesses and diameters.

3.3.1 Nickel brass sheet. Nickel brass sheet specified herein shall be 10 percent nickel brass (also known as "nickel silver") with a minus tolerance of 1 percent nickel.

3.3.2 Corrosion-resisting steel. Corrosion-resisting steel shall conform to type 410, 429, 430 or the 440 series of ASTM A176-71.

3.4 Design and construction. Tableware and flatware shall conform to the design, configuration and pattern shown on figures 1 through 32, as applicable. The pattern shall be sharp and clearly defined. The scales on the figures are provided as a convenient means for determining item proportions.

3.4.1 Base metal.

3.4.1.1 Unless corrosion-resisting steel conforming to 3.3.2 is specified (see 6.2), type I tableware and type II flatware, except knife blade see 3.4.3, shall be fabricated from nickel brass conforming to 3.3.1.

3.4.1.2 Weights of spoons and forks blanks. Minimum weights of blanks for the type II items shall be as specified in table I.

TABLE I. Weight of blanks

Item	Avdp. lbs. per gross
Forks:	
Dessert	16.0
Table	18.0
Oyster	8.0
Salad	17.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Weight of blanks (con.)

Item	Avdp. lbs. per gross
Spoons:	
Bouillon	9.0
Demitasse	4.0
Dessert	17.0
Iced tea	11.0
Soup	17.0
Sugar	13.0
Table	24.0
Tea	11.0
Ladle gravy	28.0

3.4.1.3 Wall thickness. The minimum wall thickness of type I items shall be .038 inch except for type I item 17 which shall conform to thickness requirements shown on figure 17.

3.4.1.4 Fractional fabricating tolerances. Unless otherwise specified hereinafter fractional tolerances for type I and type II items shall be plus or minus 1/4 inch.

3.4.2 Silver plating. Silver plating weight and thickness values specified herein shall be determined in accordance with 4.4.3 and 4.4.4, respectively.

3.4.2.1 Quantity of silver. The quantity of silver applied to each item shall represent an average thickness of at least 0.00125 inch or 1 troy ounce per square foot (see 6.4).

3.4.2.2 Weight of silver. The weight of silver on type II flatware shall be as specified in table II. The back of the bowls of type II items 7 through 15 and the tines of type II items 1, 2, 3, and 4 shall have on the center line of the bearing surface, a coating of silver not less than 0.0018 inch thick at the thickest point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. Weight of silver

Item	Req'd. wt. of silver troy oz./gross
Forks:	
Dessert	15
Table	18
Oyster	7
Salad	15
Knives:	
Dessert hollow handle (handle only)	8
Table hollow handle (handle only)	10
Spoons:	
Bouillon	9
Demitasse	7
Dessert	15
Iced tea	10
Soup	15
Sugar	13
Table	18
Tea	9
Ladle gravy	25

3.4.2.3 Adhesion. When tested as specified in 4.4.5, the silver plating shall show no evidence of blistering.

3.4.3 Knife blades. The blades of knives shall be fabricated from corrosion-resisting steel as specified in 3.3.2. Blades shall have a Rockwell "C" hardness ranging from 40 to 58 when tested as specified in 4.4.1 and shall show no visible indications of staining when tested as specified in 4.4.2.

3.4.4 Nonconducting handles. When nonconducting handles are specified (see figure 13), they shall consist of or be provided with insulators fabricated from wood, fiber, or such other material normally used by the manufacturer for the purpose in commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.5 Soldering and cementing.

3.4.5.1 When soldering is required on hollowware items, hard or silver solder shall be used except that soft solder may be used where contact with white metal or insulators is indicated.

3.4.5.2 Shells of hollow handle cutlery shall be silver soldered. Blades and tines may be soldered into the handles with soft solder or may be secured by a nontoxic cement (see 6.5) in accordance with commercial practice.

3.5 Finish. Finished items shall have a Butler finish.

3.6 Marking. Each item shall be clearly and permanently marked with the manufacturer's name, tradename or trademark of such known character easily identifiable with said manufacturer. The surface opposite the markings shall show no signs of penetration.

3.7 Workmanship. Finished items shall be clean, well made, and free from any defect which may affect appearance or serviceability. Except for specified cutting edges or fork tine tips, there shall be no sharp edges, projections, burrs, rough die, tool, gouge, or grind marks, or burn marks. Silver plating shall be smooth, fine grained, adherent, and free from visible blisters, pits, porosity, and indications of burning or excessive edge build up. The finished items shall not be fractured, dented, bent, punctured, or malformed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. When a first article is required, it shall be examined for defects listed in table III and specified dimensions, and tested as specified in 4.4.1 through 4.4.5, as applicable. The presence of any defects listed in table III or any dimension not within specified requirements shall be cause for rejection of the first article.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.1.1 Weight of blank. One gross of each item from a production lot shall be weighed to determine conformance with table I. Nonconformance with the weight requirement shall be cause for rejection of the lot.

4.3.2 Process examination. Examination shall be made to establish that soldering and cementing is in conformance to specified requirements of 3.4.5. If nonconformance is noted, correction shall be made to the affected items and process.

4.3.3 End item inspection. The sample unit for this inspection shall be one completely finished item of tableware or flatware. The inspection lot shall be all the items of one type and configuration offered for delivery at one time.

4.3.3.1 Visual examination. Examination shall be made of the plated items for defects in table III. The inspection level shall be level II with an acceptable quality level (AQL) of 1.5 major defects and 4.0 for total defects expressed in terms of defects per hundred units.

TABLE III. Classification of defects

Examine	Defects	Classification Major	Minor
Finish	Any component not finished as specified	X	
	Area of rust, pits, or scale	X	
	Any component surface containing embedded foreign materials	X	
	Any component surface containing cracks, burrs, or dents	X	
	Any component surface not clean or smooth	X	
Construction and workmanship	Any characteristic or detail of design or construction not in accordance with specific requirements	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examine	Defects	Classification Major	Minor
Construction and workmanship (con.)	Component missing	X	
	Burrs, sharp corners, or projections which may cause injury	X	
	Any component bent, misshapen, deformed, distorted, or misaligned	X	
	Knife blade not uniformly ground and cutting edge not sharpened	X	
	Knife cutting edge broken in any place or contains nicks, or burrs	X	
	Knife or fork blade loose in handle	X	
	Soldering not smooth, fractured, cracked, not fused, or missing where required	X	
	Silver plating not smooth, not fine grained, and, not free from blisters, porosity, indications of burning, or excessive edge build up	X	
Identification	Missing, not legible, imcomplete, incorrect or not in proper location		X
	Surface opposite markings show signs of penetration	X	

4.3.3.2 Dimensional examination. Examination shall be made of the end items for compliance with dimensions specified. Any dimension not within the specified requirements shall constitute a defect. The examination level shall be S-2 with an AQL of 4.0 defects expressed in terms of defects per hundred units.

4.3.3.3 Testing of the end item. Sample units shall be tested in accordance with 4.4. The sample size, except for 4.4.3.3, shall be 3 items of tableware or flatware, as applicable, selected from each inspection lot. Failure of any sample to pass any applicable test specified in 4.4 shall be cause for rejecting the lot.

4.3.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects shall be as indicated in table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE IV. Preparation for delivery defects

Examine	Defects
Markings (exterior and interior container)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any nonconforming component: component missing, damaged, or otherwise defective affecting serviceability.
Contents (exterior and interior container)	Number per container is more or less than required. Net weight exceeds requirements.

4.3.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.4 Tests.

4.4.1 Hardness. Samples shall be tested for compliance with 3.4.3 as specified in ASTM E18. Hardness readings shall be determined at a minimum of 3 locations; point, center, and 1 inch from the shoulder of the knife blade. Any hardness reading not within specified limits shall be considered failure of this test.

4.4.2 Corrosion test. Samples shall be tested as follows for compliance with 3.4.3. Three drops of copper sulphate solution shall be placed at intervals on the cleaned surface of the blade of each sample. After remaining on the blade for 6 minutes, the solution shall be washed off with clean water. Any visible indication of staining shall be considered failure of this test. The copper sulphate solution shall consist of:

Copper sulfate ($CU\ SO_4\ 5H_2O$)	4 grams
Sulfuric acid (H_2SO_4) (sp. gr. 1.84)	10 ml.
Water (H_2O)	90 ml.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.4.3 Weight of silver test. Samples shall be tested as specified in 4.4.3.1 or 4.4.3.2 (as applicable); or, 4.4.3.3 for compliance with 3.4.2.1. Any plating weight not within specified limits shall be considered noncompliance. Unless a minimum weight is specified, a minus tolerance of 15 percent shall be permitted on individual samples; and, a 5 percent permitted on the average of 3 or more samples. The surface plated area and deposit weights specified shall be determined in accordance with the manufacturer's commercial practice for the determinations on the same or similar items (see 6.4).

4.4.3.1 On nickel brass. The samples shall be thoroughly cleaned, rinsed, dried, and weighed. They shall then be introduced into a suitable vessel containing a mixture of 19 parts of volume of C.P. concentrated sulfuric acid (sp. gr. 1.84) and 1 part by volume of C.P. concentrated nitric acid (sp. gr. 1.42) which mixture has been heated (e.g. on a sand bath) to 80° C. (176° F.). (The stripping bath shall be kept covered when not in use to prevent absorption of water.) The samples shall be kept in the solution until all the silver is dissolved, as indicated by the production of a dark color over the entire surface. The samples shall then be thoroughly rinsed, dried, and reweighed; and, the loss in weight shall be considered as silver.

4.4.3.2 On corrosion-resisting steel. The samples shall be throughly cleaned, rinsed, dried, and weighed; and, shall then be hung as anodes in a solution containing 30 g/L (4 oz./gal.) of sodium cyanide, in which an iron or silver cathode is suspended. A potential of 3 to 4 volts shall be applied and the samples shall be shaken or the solution agitated until all the silver is dissolved. The samples shall then be thoroughly rinsed, dried, and reweighed; and, the loss in weight shall be considered as silver.

4.4.3.3 Alternate method. Weigh one or more pieces from each gross or 100 pieces before plating and after plating and finishing, to determine whether specified amount of silver is present.

4.4.4 Thickness of silver test. Samples shall be tested as specified in 4.4.4.1 or 4.4.4.2 for compliance with 3.4.2.1 and 3.4.2.2. Any silver plating thickness not within specified limits shall be considered noncompliance.

4.4.4.1 The samples shall be measured in accordance with the appendix to ASTM B 298.

4.4.4.2 Plate that portion of the samples to be measured with copper, from an acid copper sulphate solution, to a thickness of at least 0.01 inch. Then cut, with a fine saw, along the center axis of the portion to be plated with copper. Carefully polish the cut surface on a plane perpendicular to the original surface of the sample until all saw marks and polishing scratches are obliterated; and measure the thickness of the silver coating with a suitable microscope and scale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.4.5 Adhesion test. Samples shall be tested as follows for compliance with 3.4.2.3: The samples shall be placed in an oven at 135° to 177° C. (275° to 350° F.) for the time required to bring the samples to temperature plus 30 minutes. The samples shall then be removed, cooled in air, and examined at four diameters magnification. Any evidence of blistering shall be considered noncompliance.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each plated item shall be packaged in a polyethylene bag of 0.002 inch minimum thickness with all closures and seams heat sealed. Tines of forks and blades of knives shall be covered with a sheath of paperboard or similar cushioning material to avoid puncturing the bag. Sharp edges of hollowware items shall be suitably covered to avoid puncturing the bag.

5.1.1.2 Intermediate packaging.

5.1.1.2.1 Flatware. Twelve identical flatware items, unit packaged as specified in 5.1.1.1, shall be packaged in a folding paperboard box or setup paperboard box conforming to PPP-B-566 or PPP-B-676, respectively. Box closure shall be in accordance with the appendix to the applicable box specification.

5.1.1.2.2 Hollowware. Each item of hollowware, unit packaged as specified in 5.1.1.1, shall be packaged in a fiberboard box conforming to type CF, class domestic of PPP-B-636. Box closure shall be in accordance with PPP-B-636.

5.1.2 Level C. One type or size plated item shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. One type or size plated item, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, V2s of PPP-B-636. The weight of the contents of each shipping container shall not exceed 65 pounds. Each shipping container shall be closed, waterproofed, by means of tape, and reinforced with flat strapping or tape banding in accordance with PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. One type or size plated item, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard container conforming to style RSC, type CF, class domestic of PPP-B-636. The weight of the contents of each shipping container shall not exceed 65 pounds. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be V3c, V3s, or V4s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C. One type or size plated item shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The plated items covered by this specification are intended for use in officers' and executive messes and dining rooms.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and item to be furnished (see 1.2).
(c) When a first article is required (see 3.1).
(d) When corrosion-resisting steel is required for base metal (see 3.4.1.1).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Supersession data. The following tableware and flatware cited in Military Standards have been included as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

Formerly	Item	Identified in RR-T-51D
		Type I
MS 15058	Bowl, food serving	Item 1
MS 15062	Bowl, sugar	Item 2
MS 15050	Caster, cruet	Item 3
MS 15067	Coffeepot, serving 32 oz.	Item 4
MS 15060	Dish, food serving, 8 inch diameter	Item 5
MS 15059	Dish, food serving, 10 3/4 inch by 8 3/4 inch	Item 6
MS 15045	Gravy boat	Item 7
MS 15064	Pitcher, cream 8 oz.	Item 8
MS 15051	Pitcher, cream 16 oz.	Item 9
MS 15066	Pitcher, syrup	Item 10
MS 15052	Pitcher, water 3 1/2 quart	Item 11
MS 15047	Platter, food serving, 16 in.	Item 12
MS 15070	Teapot, serving, 22 oz.	Item 13
MS 15048	Tray service, 12 inch	Item 14
MS 15049	Tray service, 18 inch	Item 15
MS 15061	Tray bread	Item 16
---	Tureen, soup with cover	Item 17
		Type II
MS 15071	Fork, dessert	Item 1
MS 17211	Fork, salad	Item 2
MS 15072	Fork, seafood	Item 3
MS 15074	Fork, table	Item 4
MS 15075	Knife, dessert	Item 5
MS 15076	Knife, table	Item 6
MS 15078	Spoon, bouillon	Item 7
MS 15079	Spoon, demitasse	Item 8
MS 15085	Spoon, dessert	Item 9
MS 17212	Spoon, iced tea	Item 10
MS 15081	Spoon, soup	Item 11
MS 15082	Spoon, sugar	Item 12
MS 15083	Spoon, table	Item 13
MS 15084	Spoon, tea	Item 14
MS 15077	Ladle, gravy, table	Item 15

6.4 Relation between the area and the weight and average thickness of the deposit:

(a) Specific gravity of silver = 10.5.
(b) Grams X 0.0322 = troy oz.
(c) Grams X 0.6440 = dwt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

(d) A silver coating 0.001 inch in thickness weighs 0.80 troy oz./sq. ft., or 0.11 dwt./sq. in.
(e) Dwt./doz. X 0.6 = troy oz./gross.
(f) Average thickness in inches X 800 = troy oz./sq. ft.
(g) Average thickness in inches X 16,000 = dwt./sq. ft.
(h) Area of a piece in square inches = number of square feet per gross.
(i) For an average thickness of 0.00125, the area in square inches is equal to the number of troy ounces per gross.
(j) For an average thickness of 0.00125 inch, the area in square inches, multiplied by 0.14 (or divided by 7.2) is equal to the number of pennyweights per piece. Oz./sq. ft., 16 dwt./sq. ft., or 0.11 dwt./sq. in.

EXAMPLES

If the area of a salad fork is 13 sq. in., an average thickness of 0.00125 inch will require 13 troy oz./gross.

If the area of a meat dish is 324 sq. in., an average thickness of 0.00125 inch will require 324/7.2 = 45 dwt./piece.

6.5 Toxicity. Questions pertaining to the adverse effect of materials on the health of personnel should be referred by the procuring activity to the appropriate departmental medical service who will act as an advisor to the procuring activity.

6.6 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be preproduction sample and should consist of one unit. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.7 For civil agency procurements. When level B packaging is required for civil agency procurements, the requirements in 5.1.1, level A shall apply.

6.8 The pattern for the type I tableware is commercially manufactured as the Gadroon Pattern. The type II flatware is commercially manufactured as the Kings Pattern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

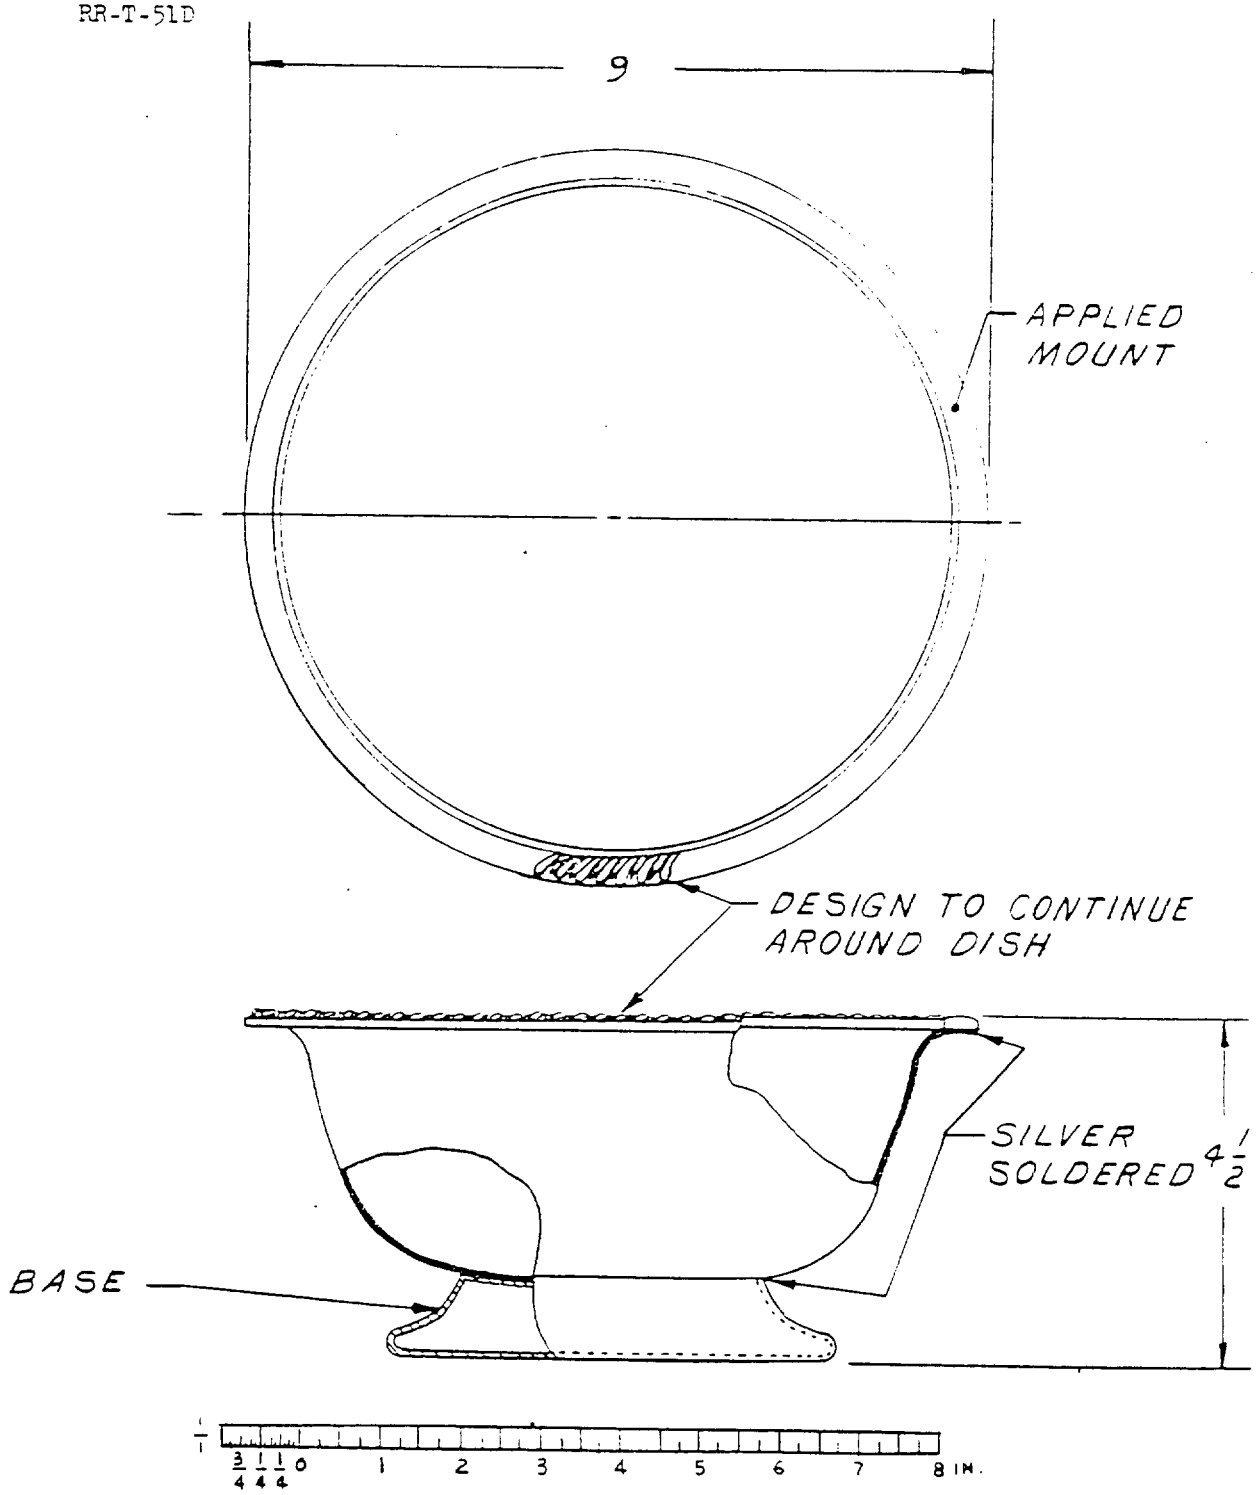


FIG. 1 BOWL, FOOD SERVING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.


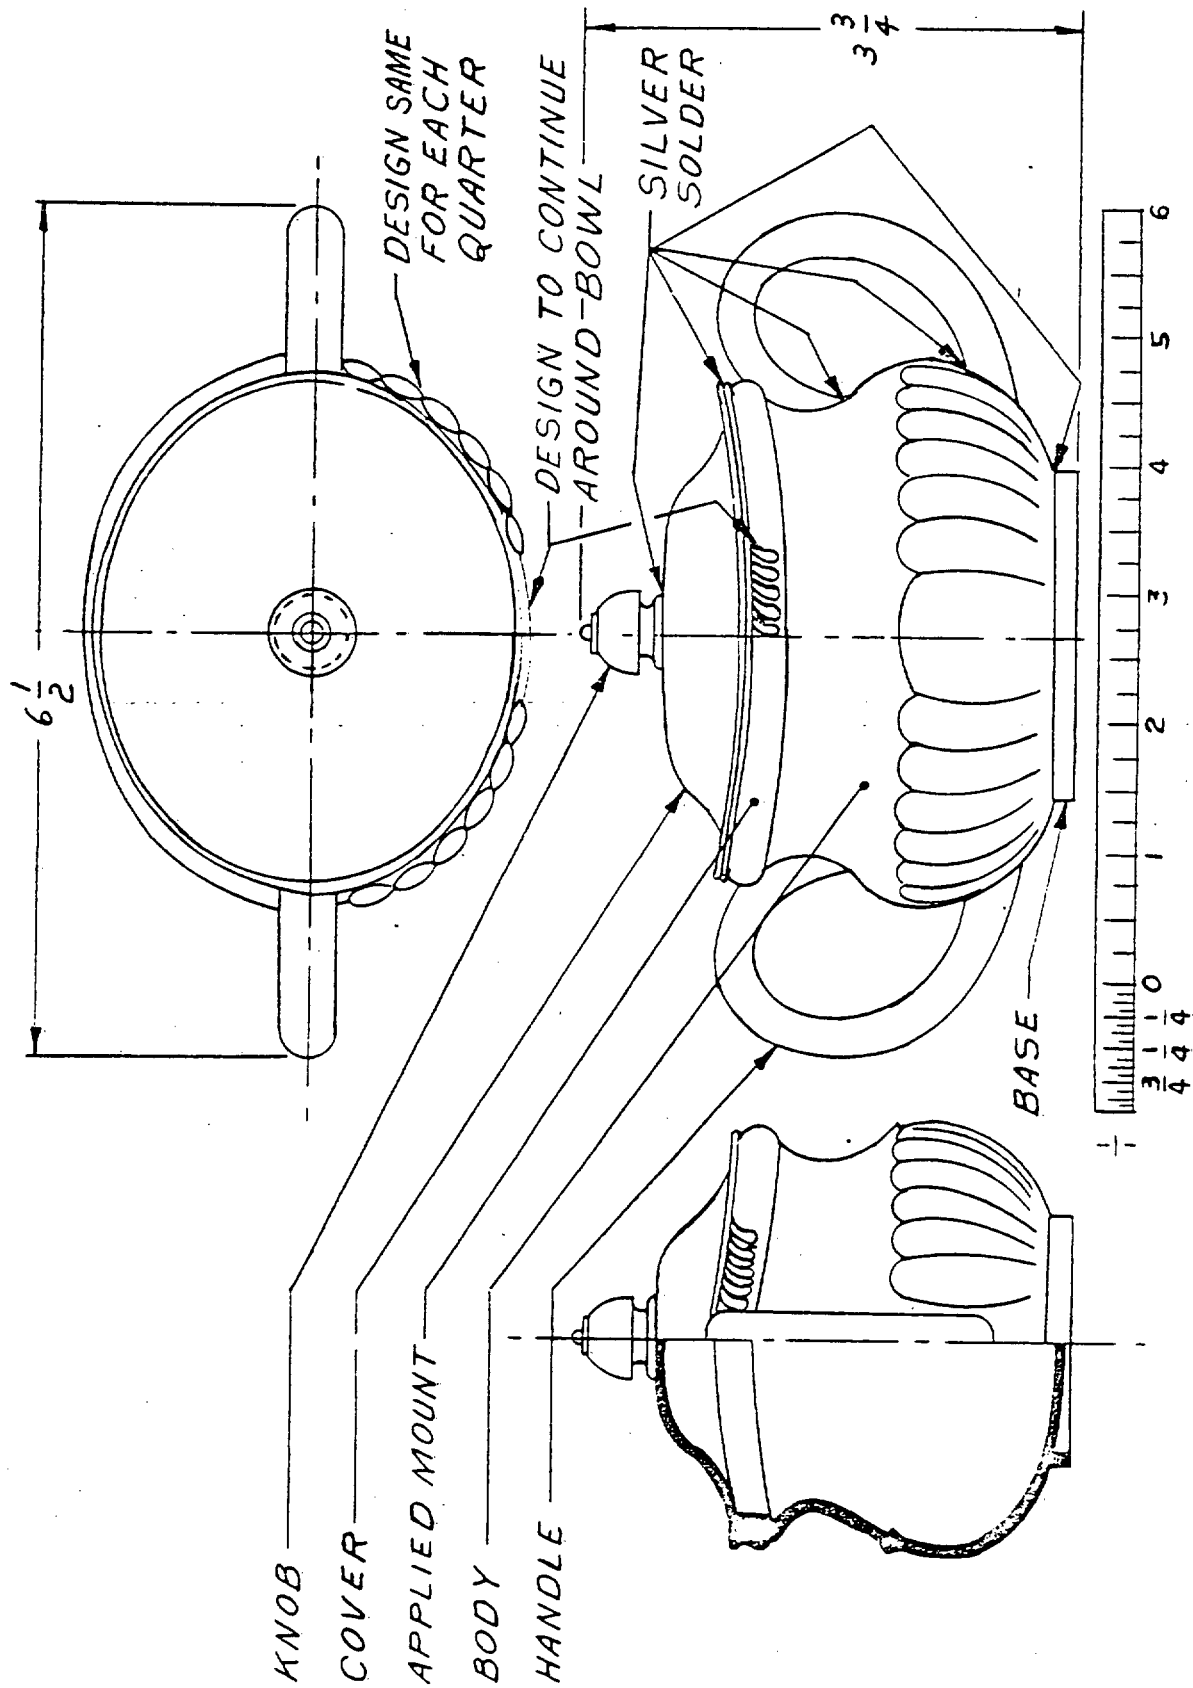


FIG. 2 BOWL, SUGAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

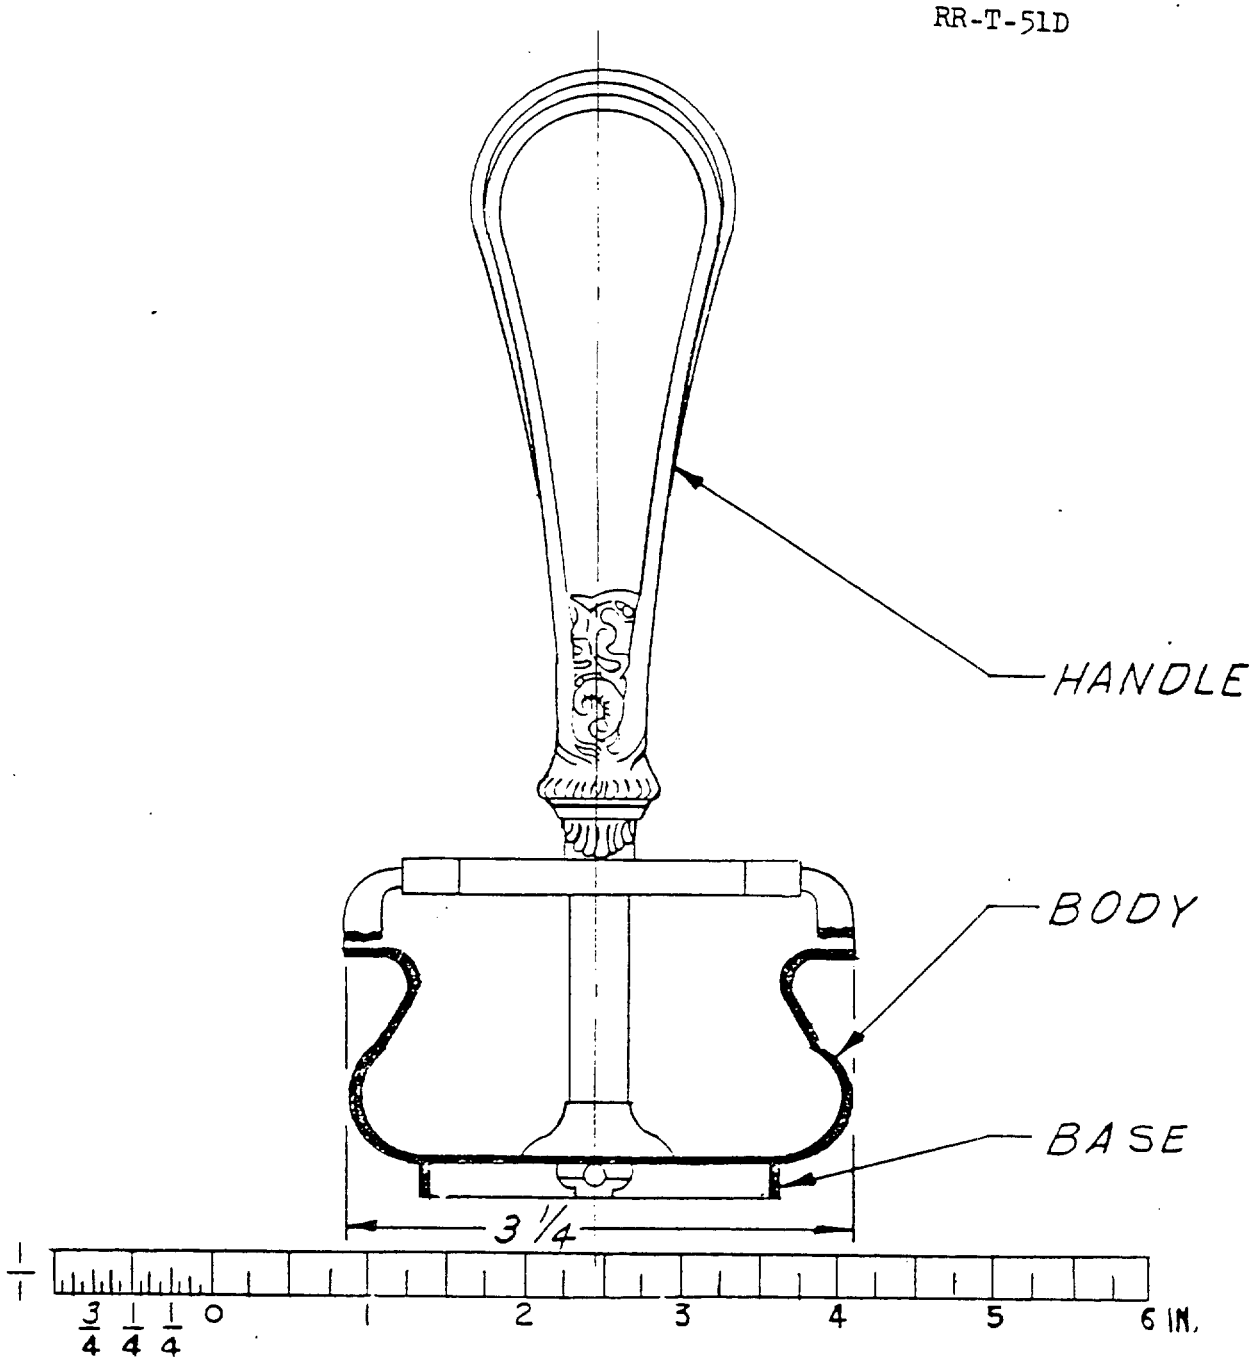

SIDE VIEW

FIG. 3 – CASTER, CRUET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

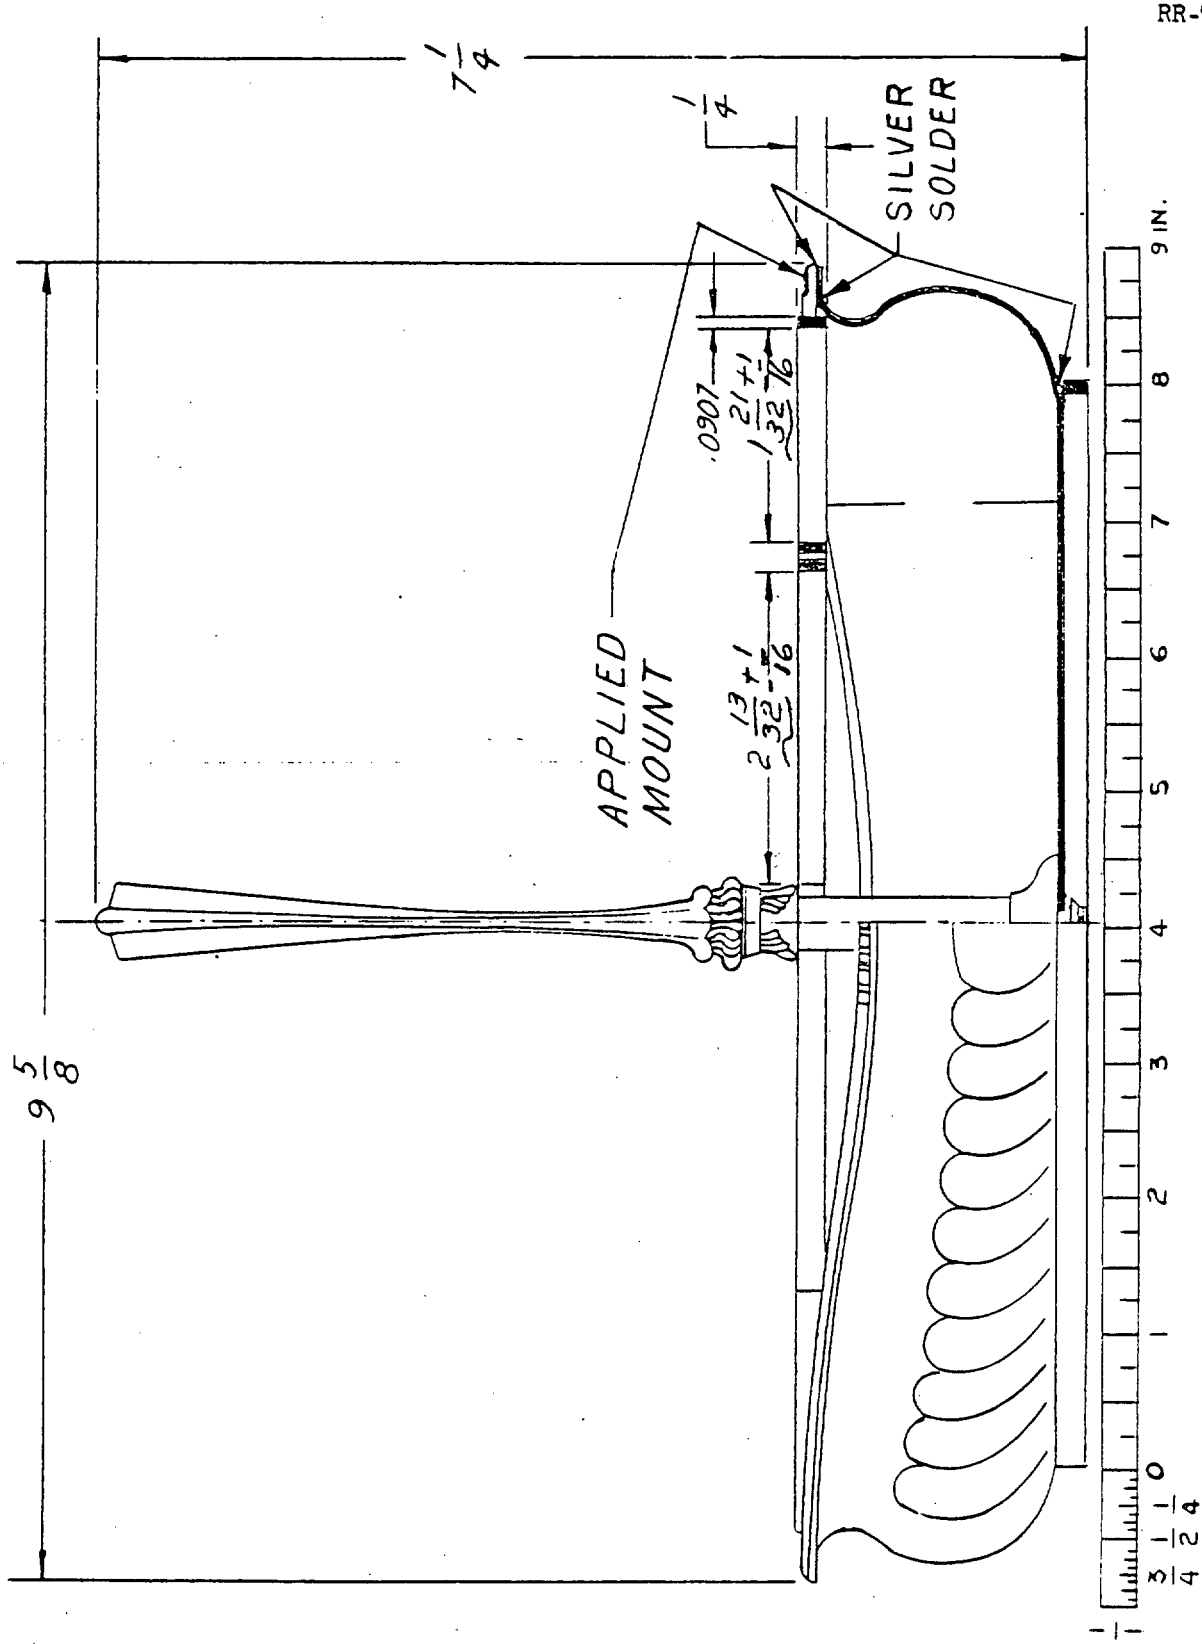


FIG. 34 CASTER, CRUET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

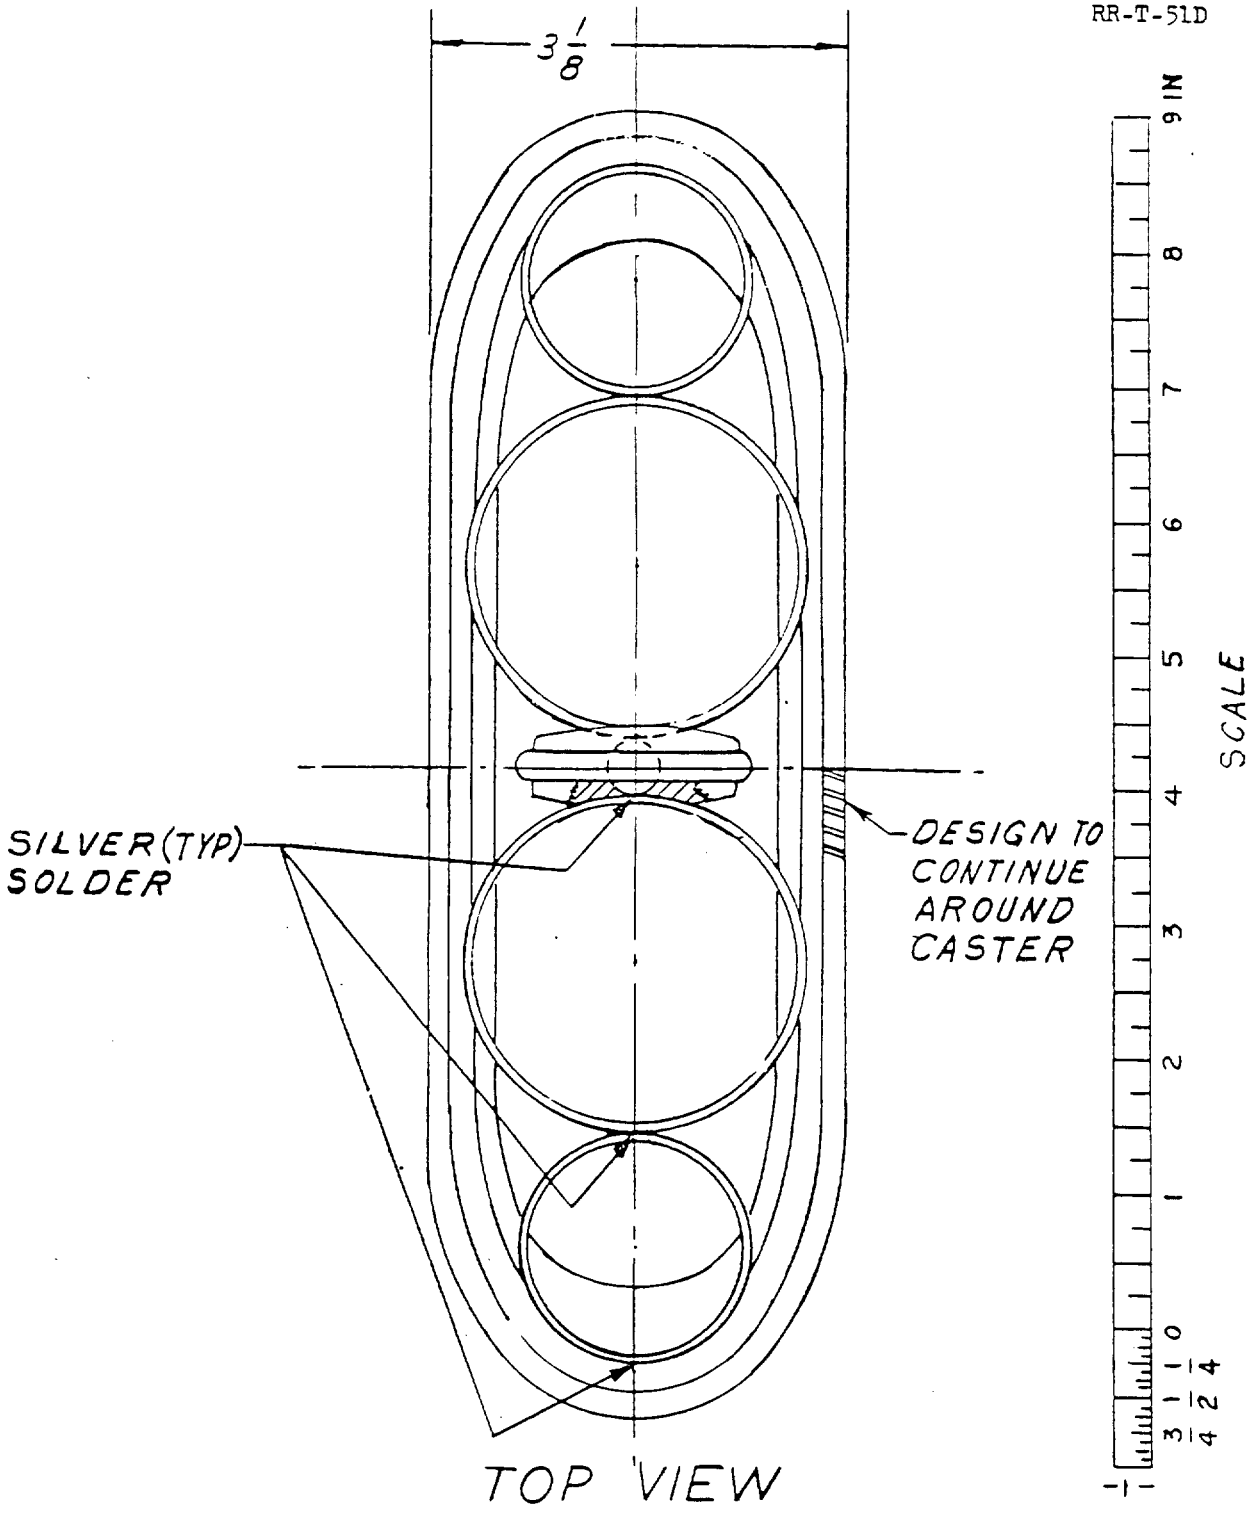


FIG. 3B CASTER, CRUET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

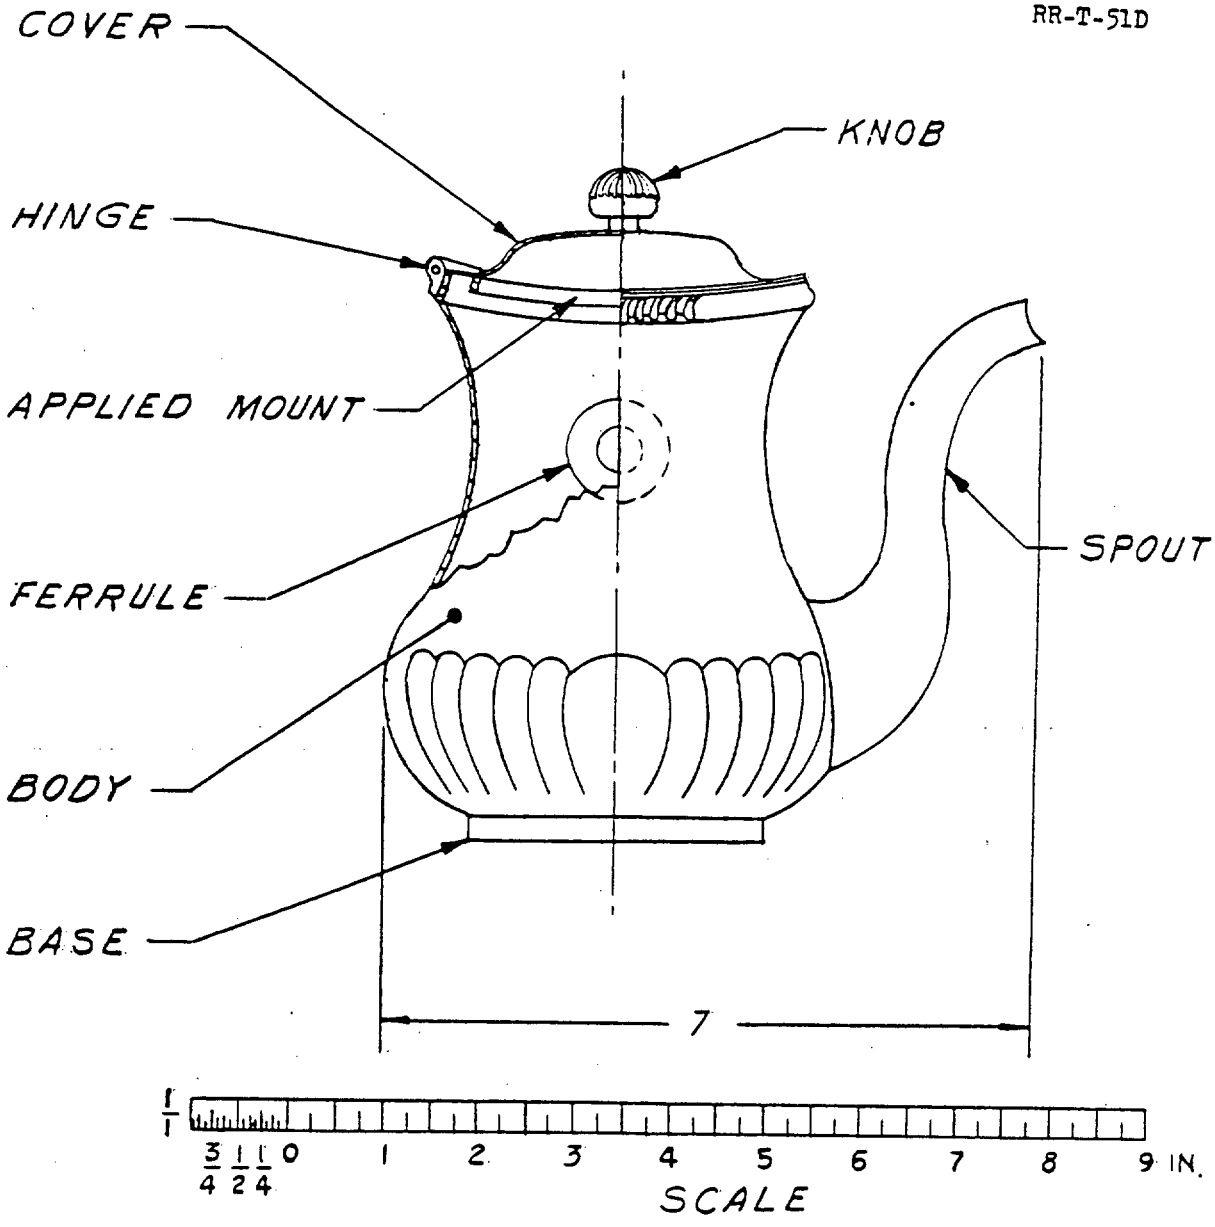


FIG. 4 - COFFEEPOT, SERVING - 32 OUNCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

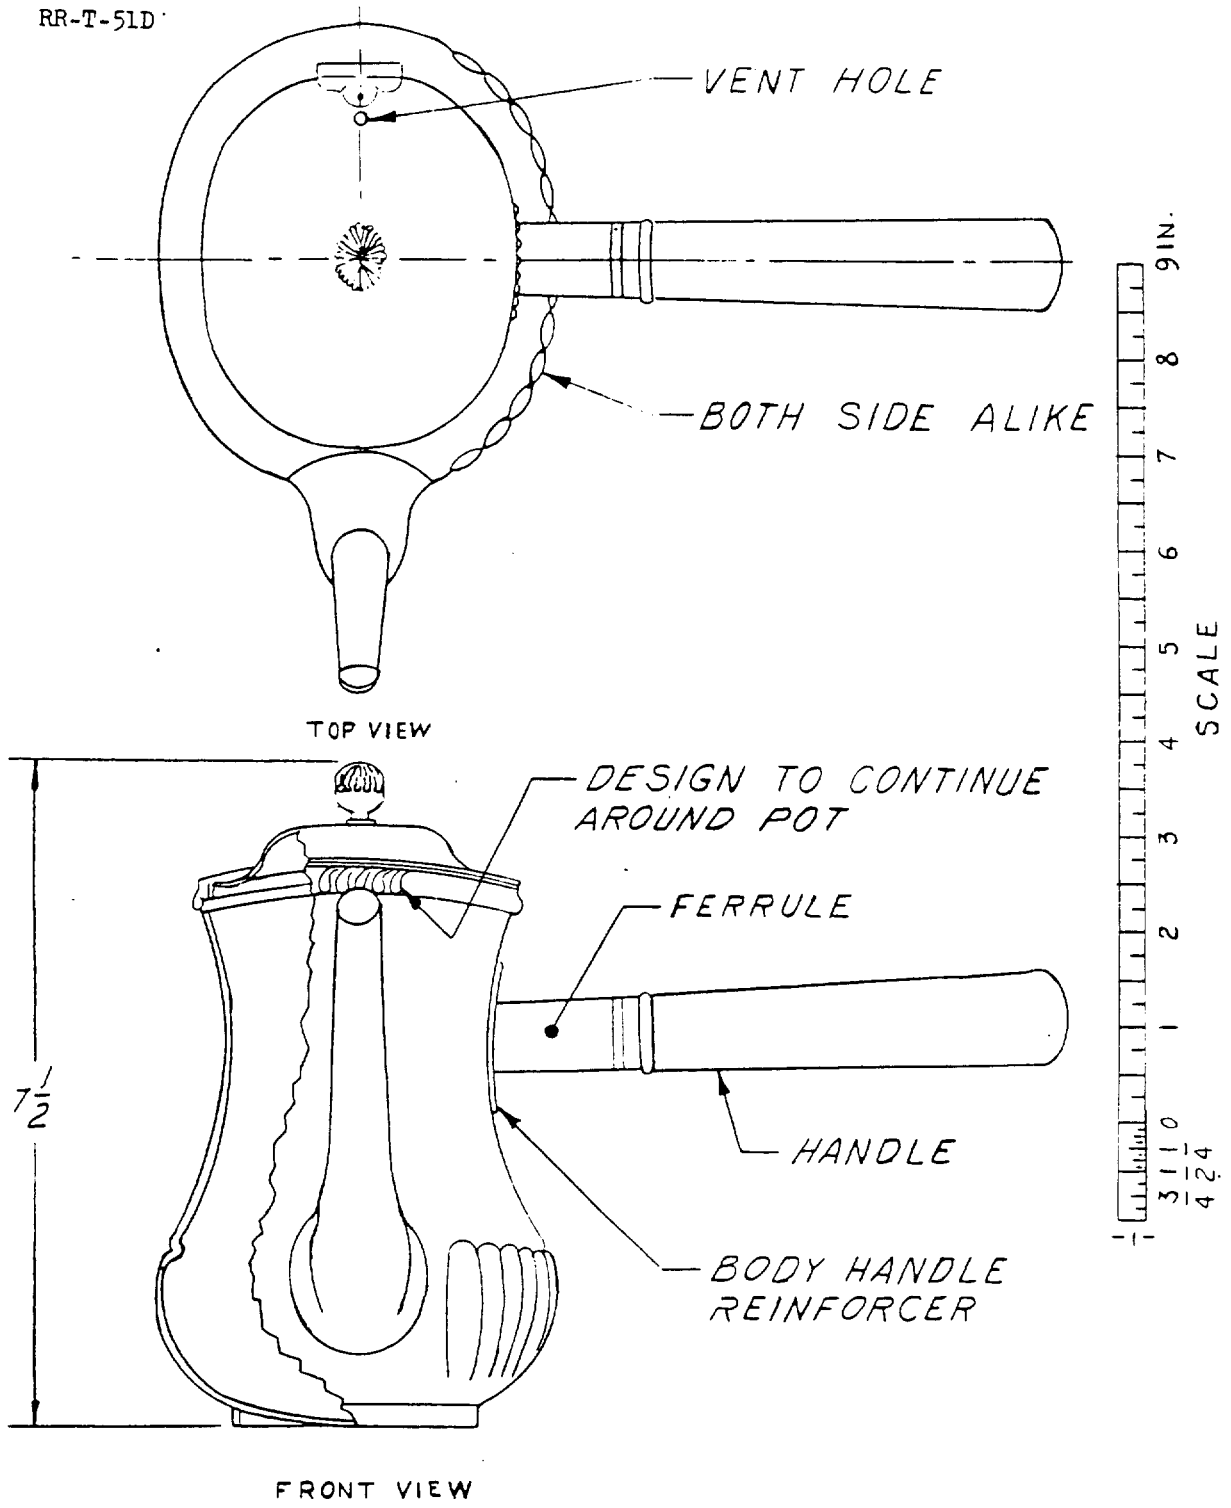


FIG. 4A COFFEEPOT, SERVING-32 OUNCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

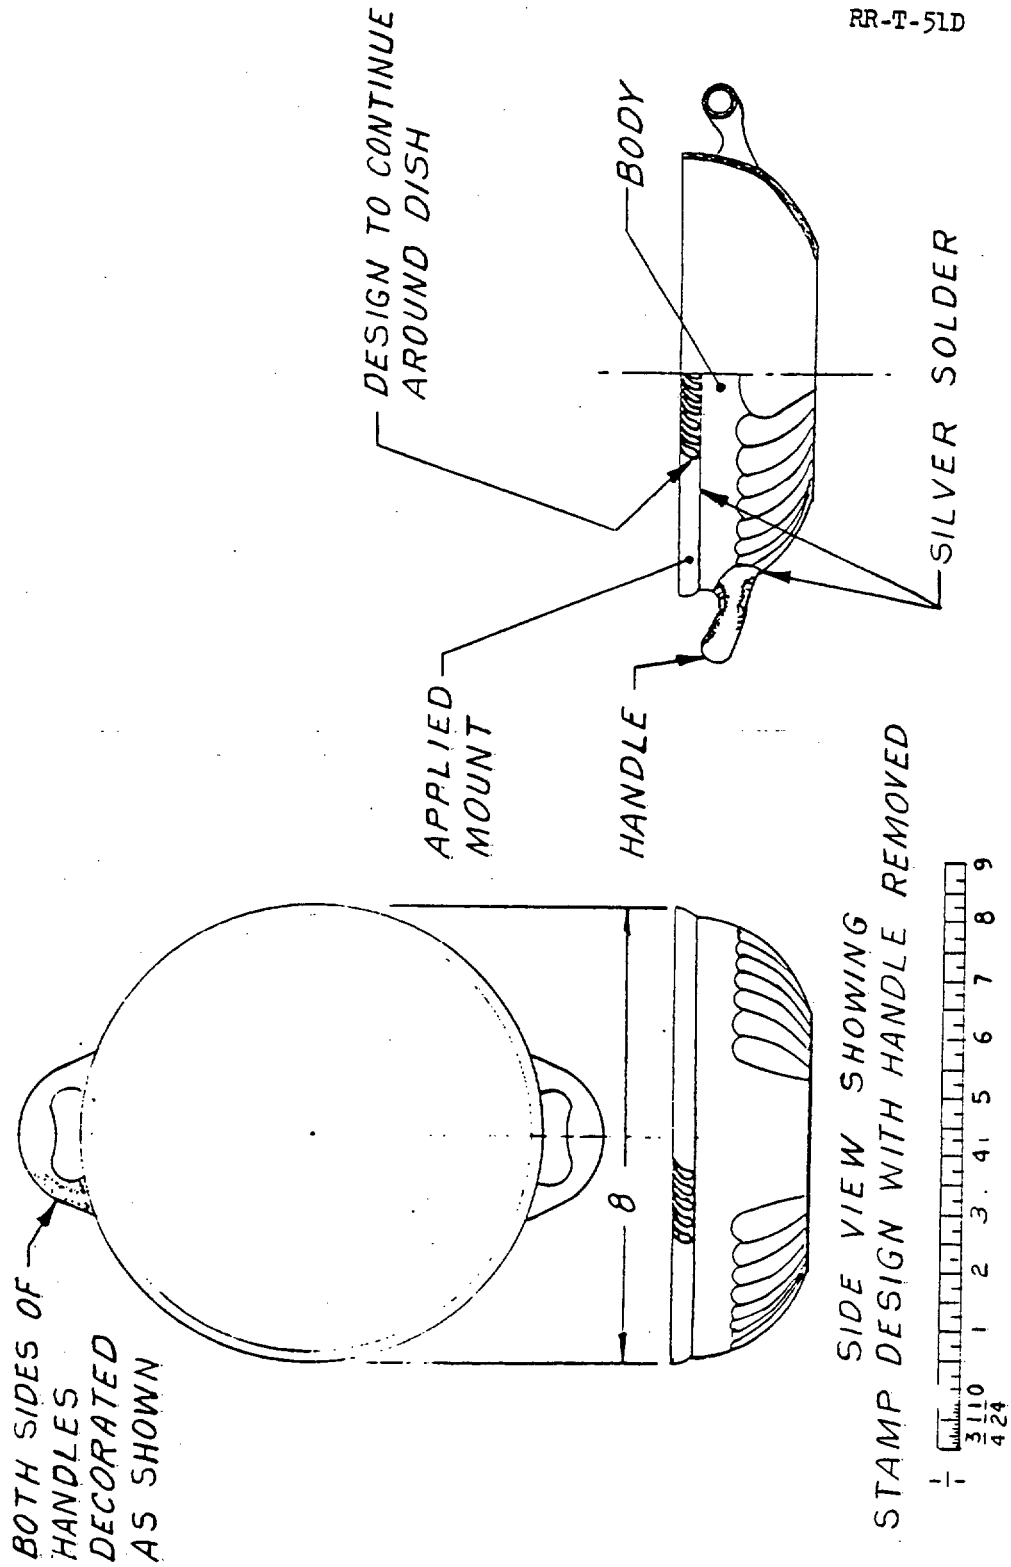


FIG. 5 DISH, FOOD SERVING 8 INCH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

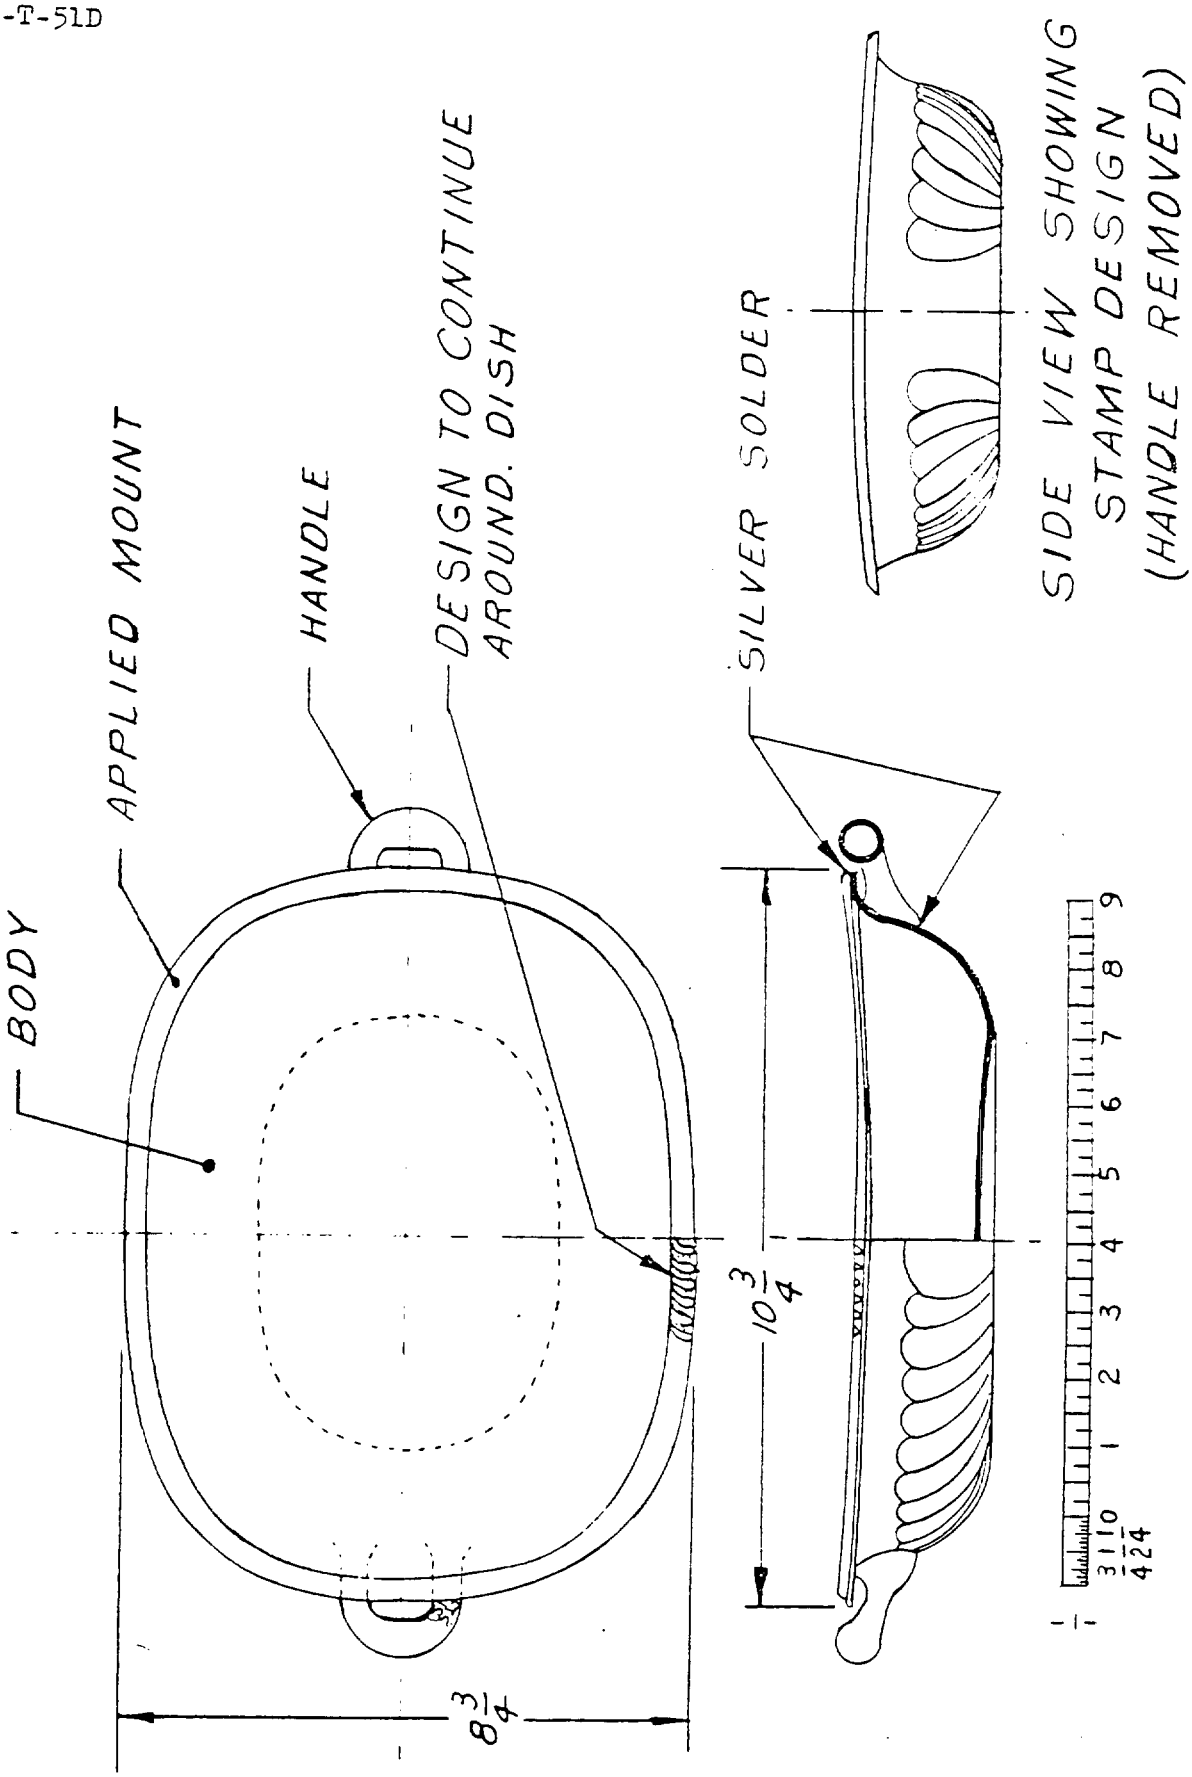


FIG. 6 DISH, FOOD SERVING RECTANGULAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

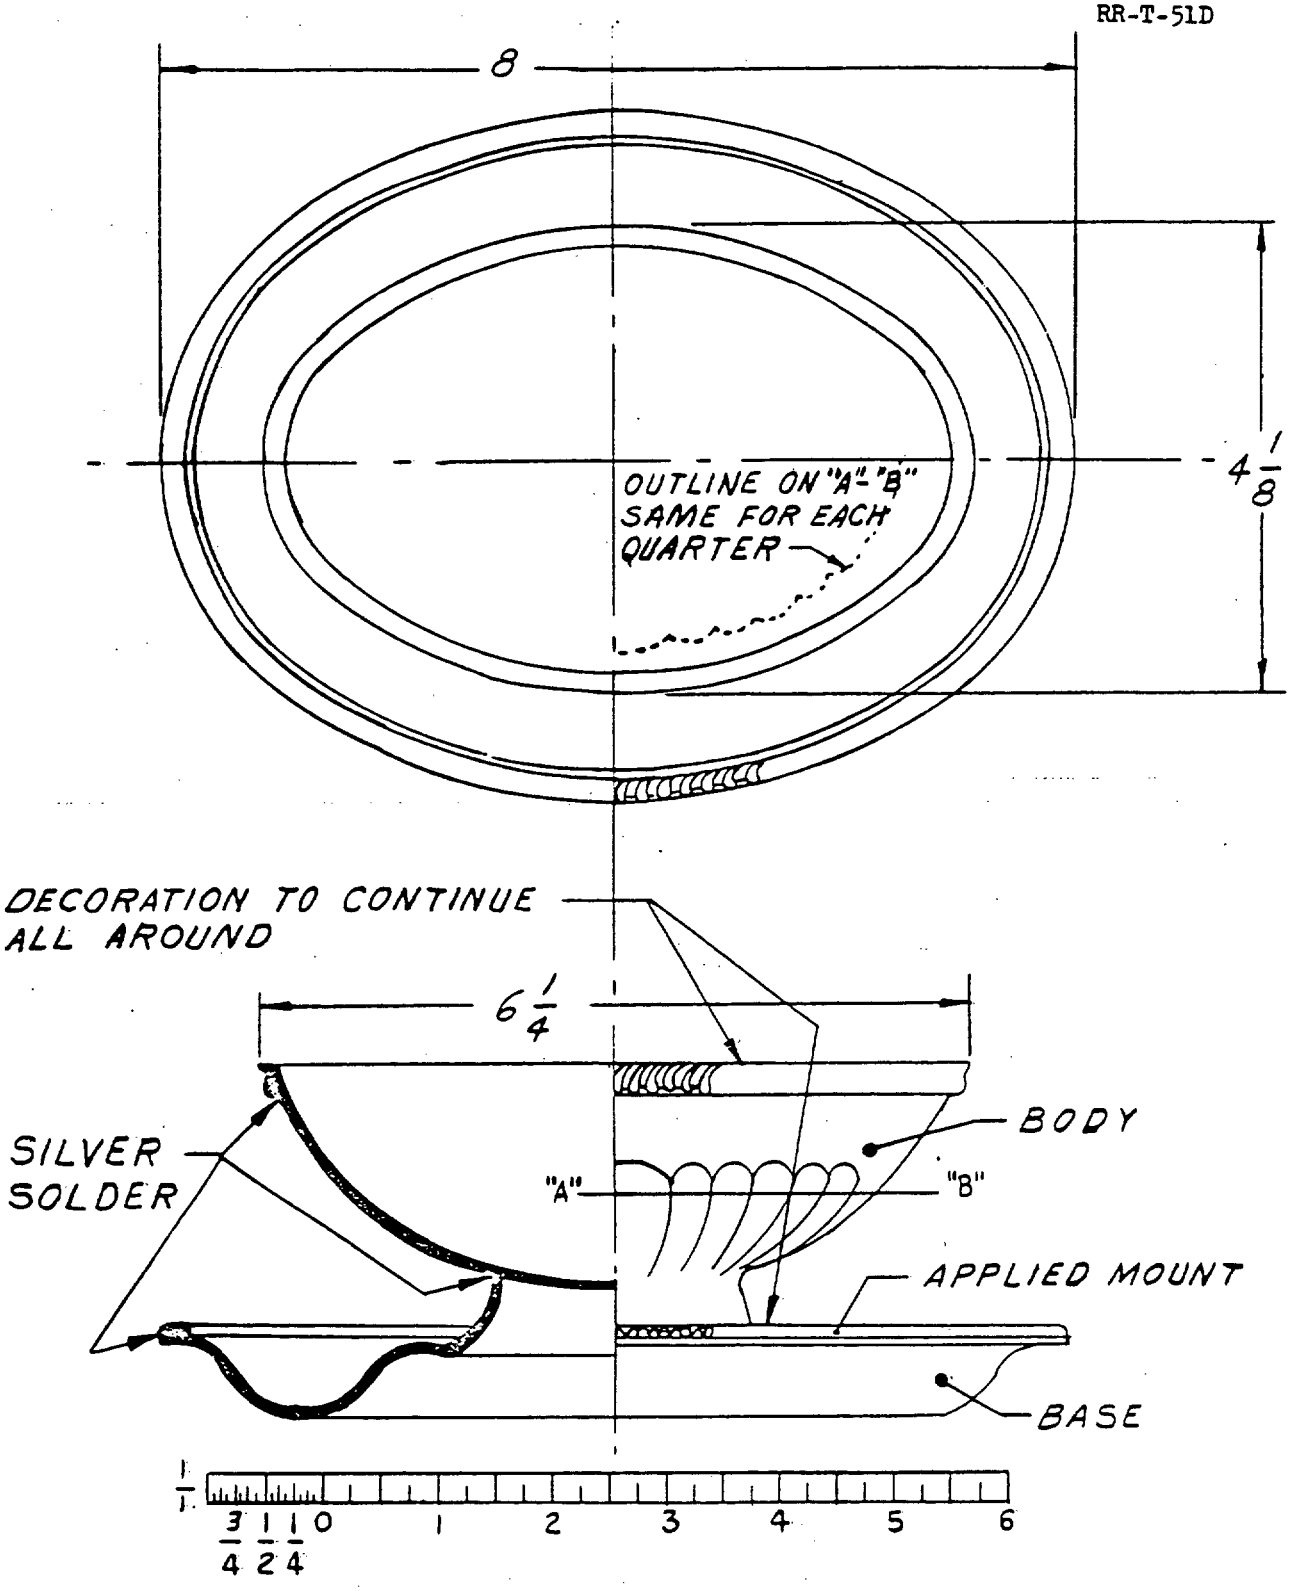


FIG. 7 BOAT, GRAVY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

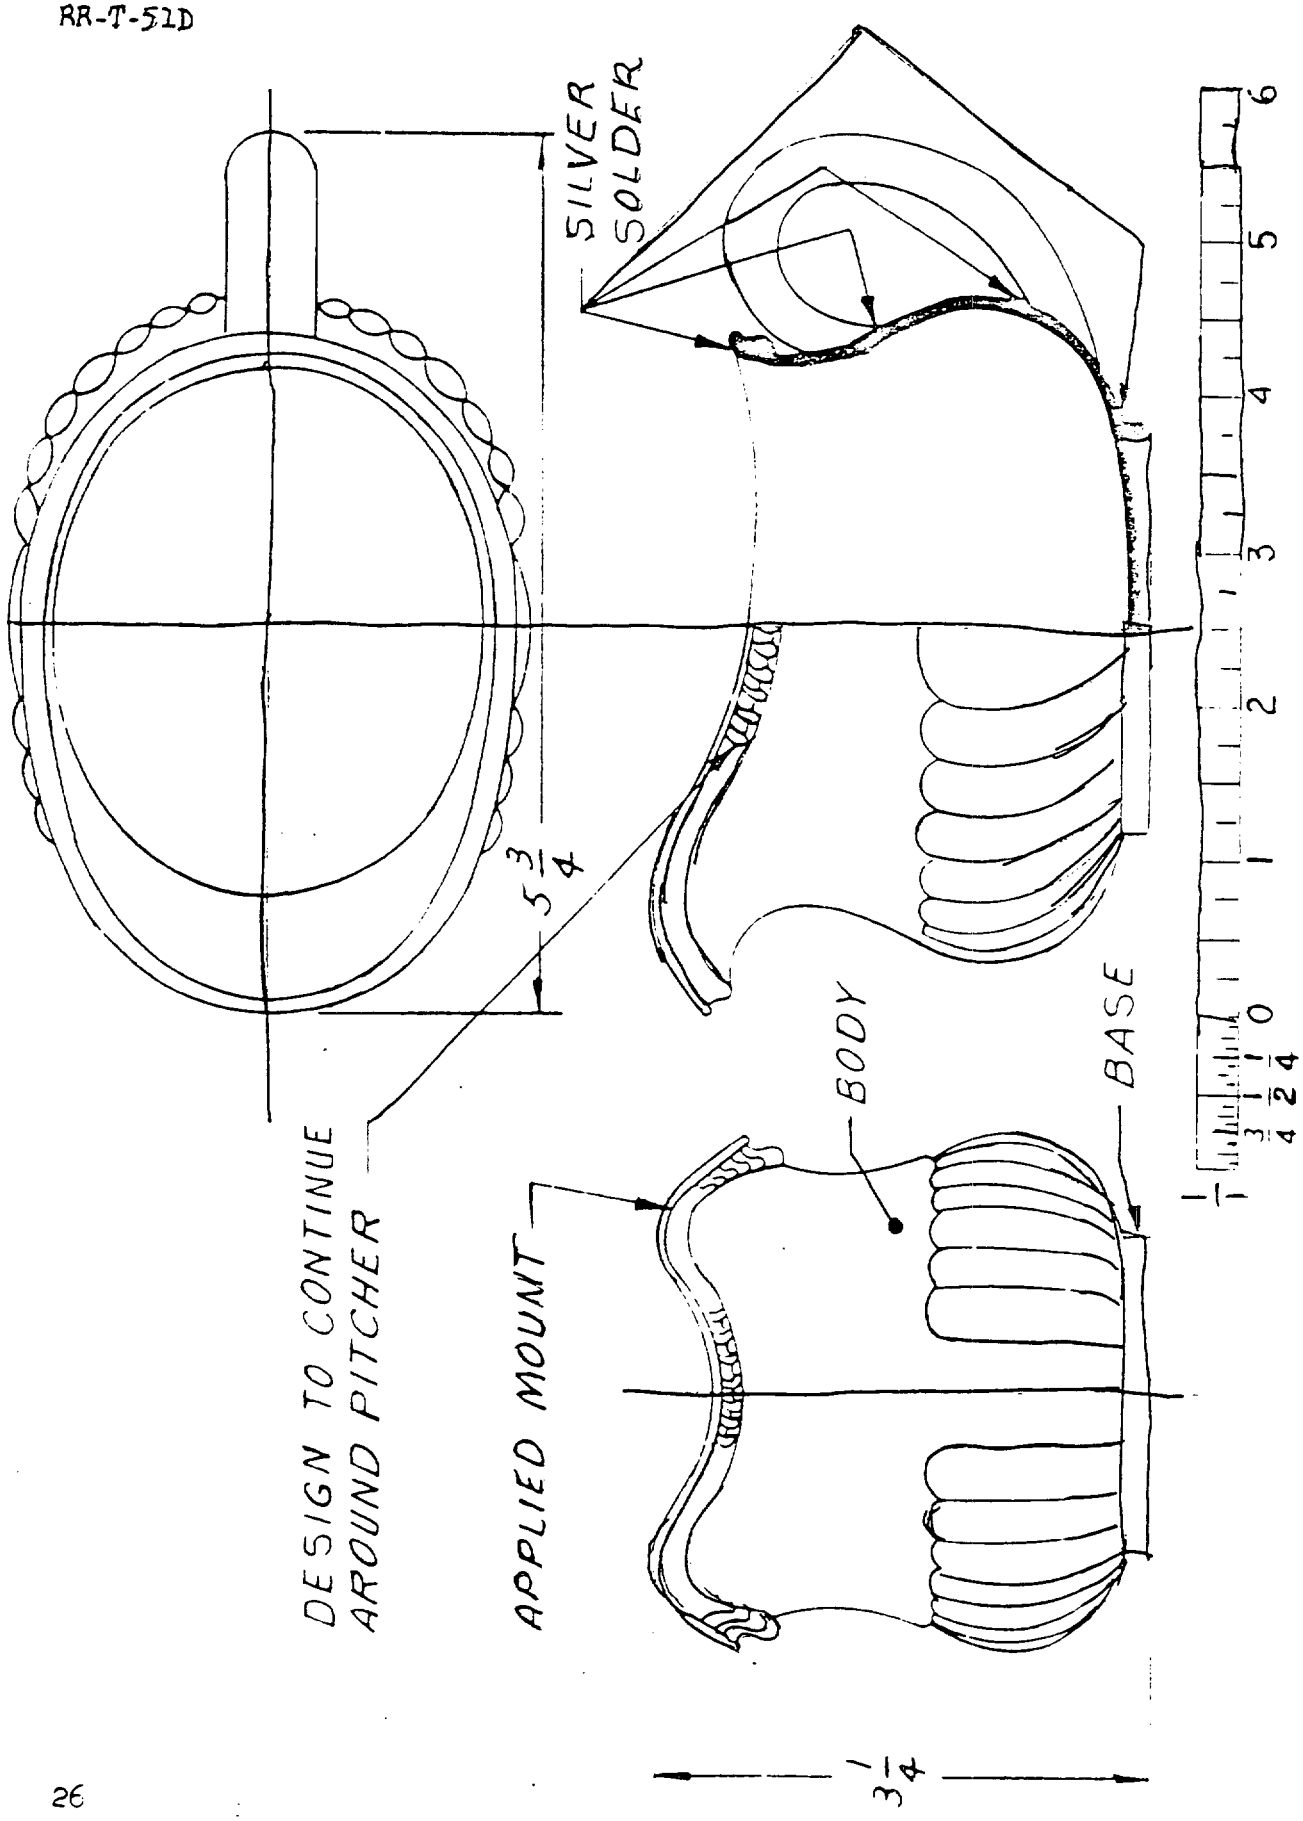


FIG. 8 - PITCHER, CREAM, 8-OUNCE

Source: https://assistdla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

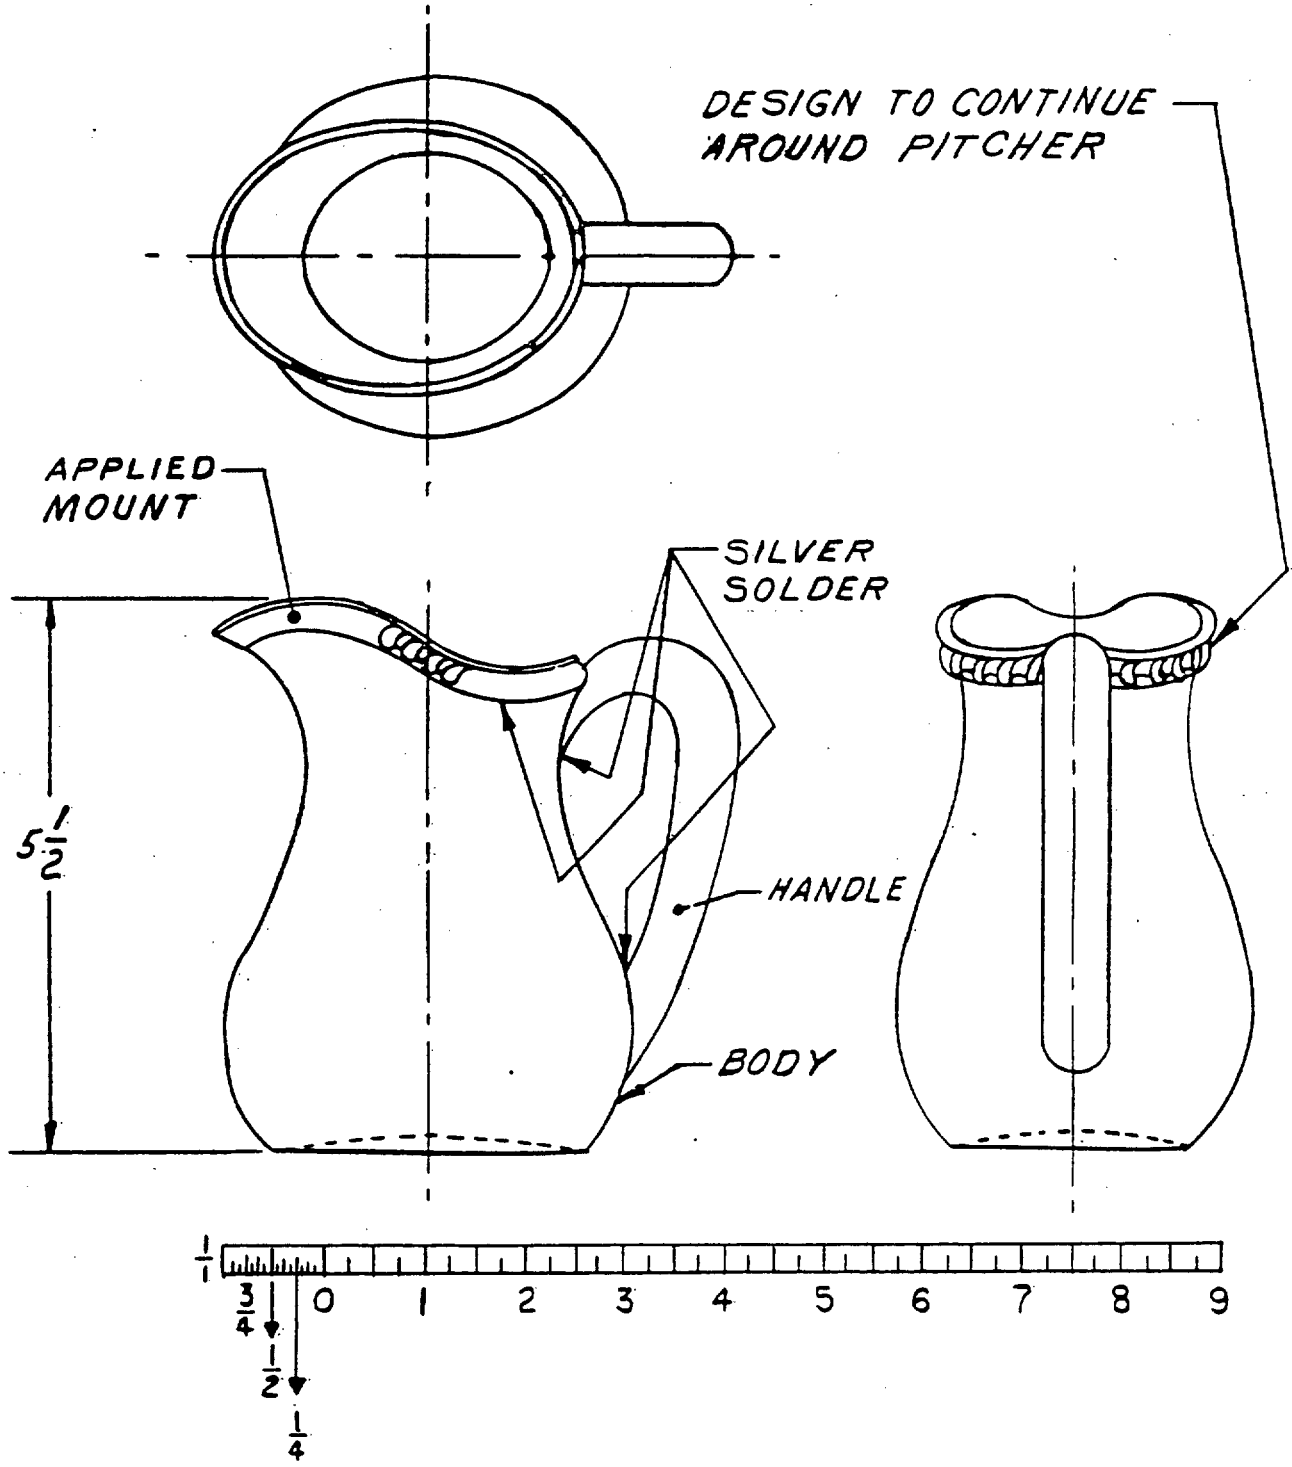


FIG 9 - PITCHER, CREAM, 16 - OUNCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

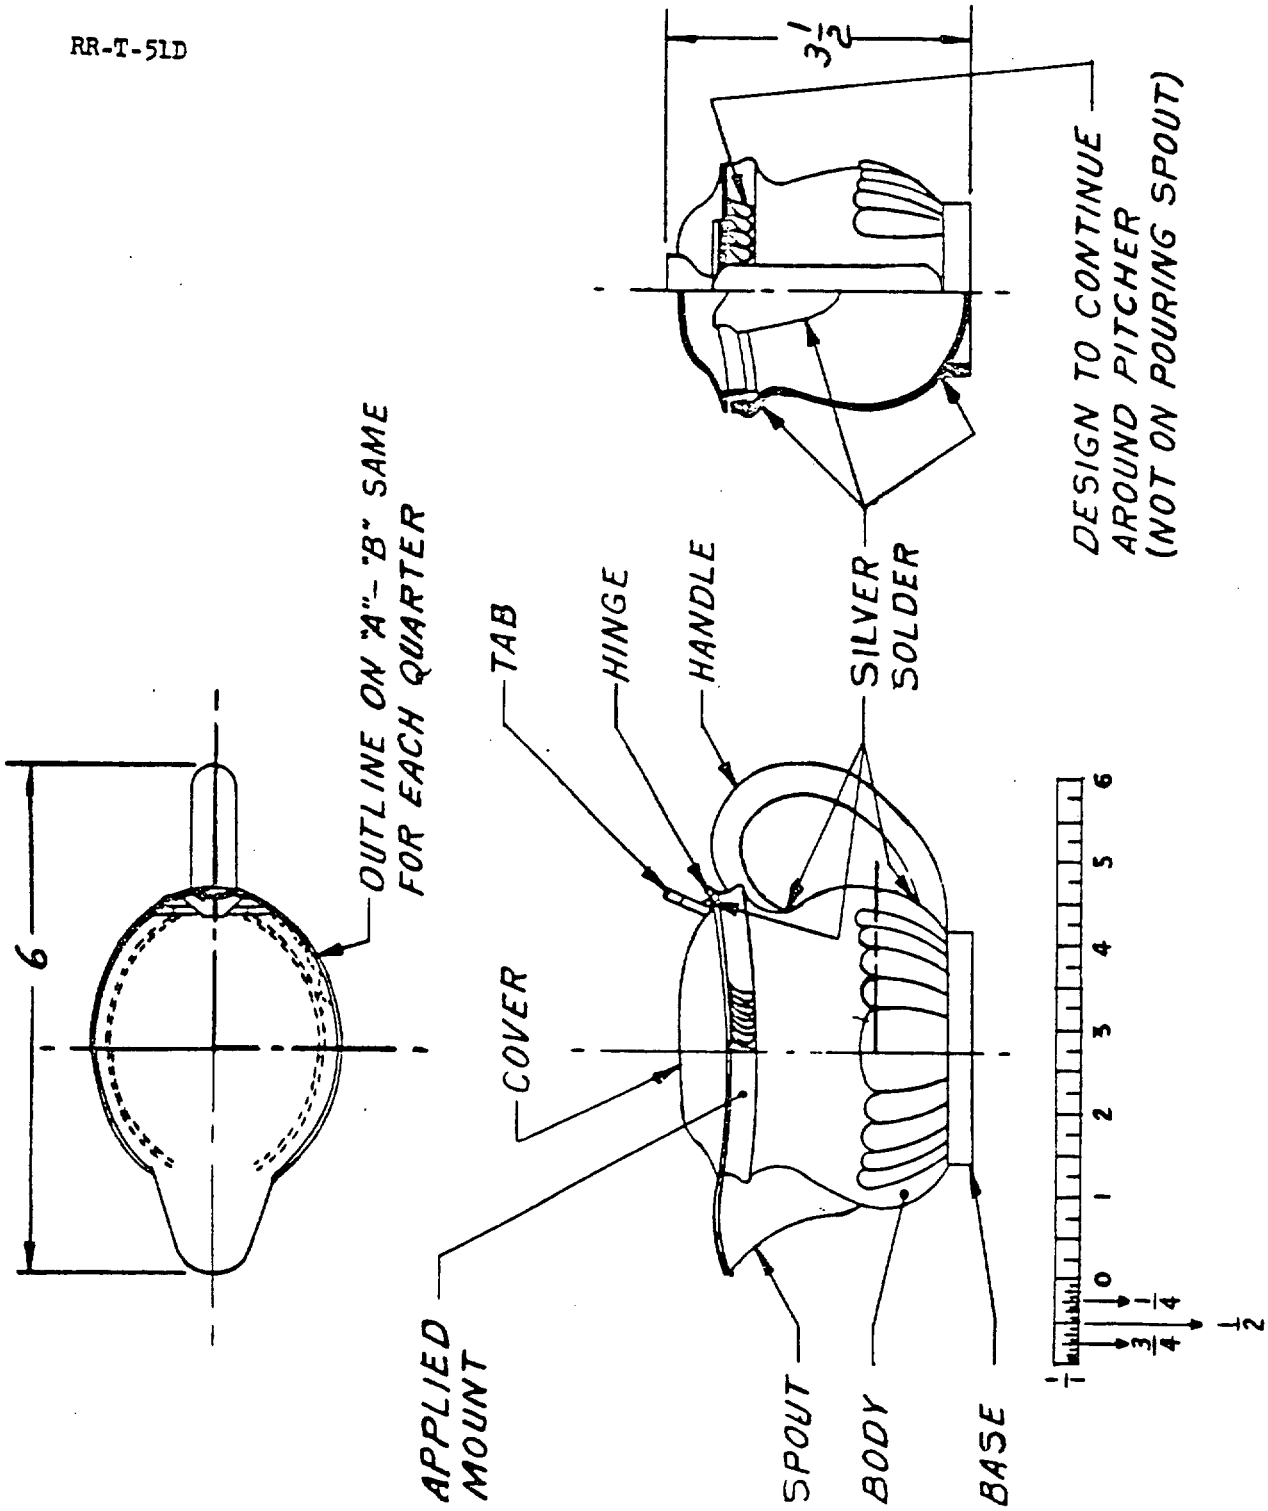


FIG. 10 PITCHER, SYRUP
9 OZ CAPACITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

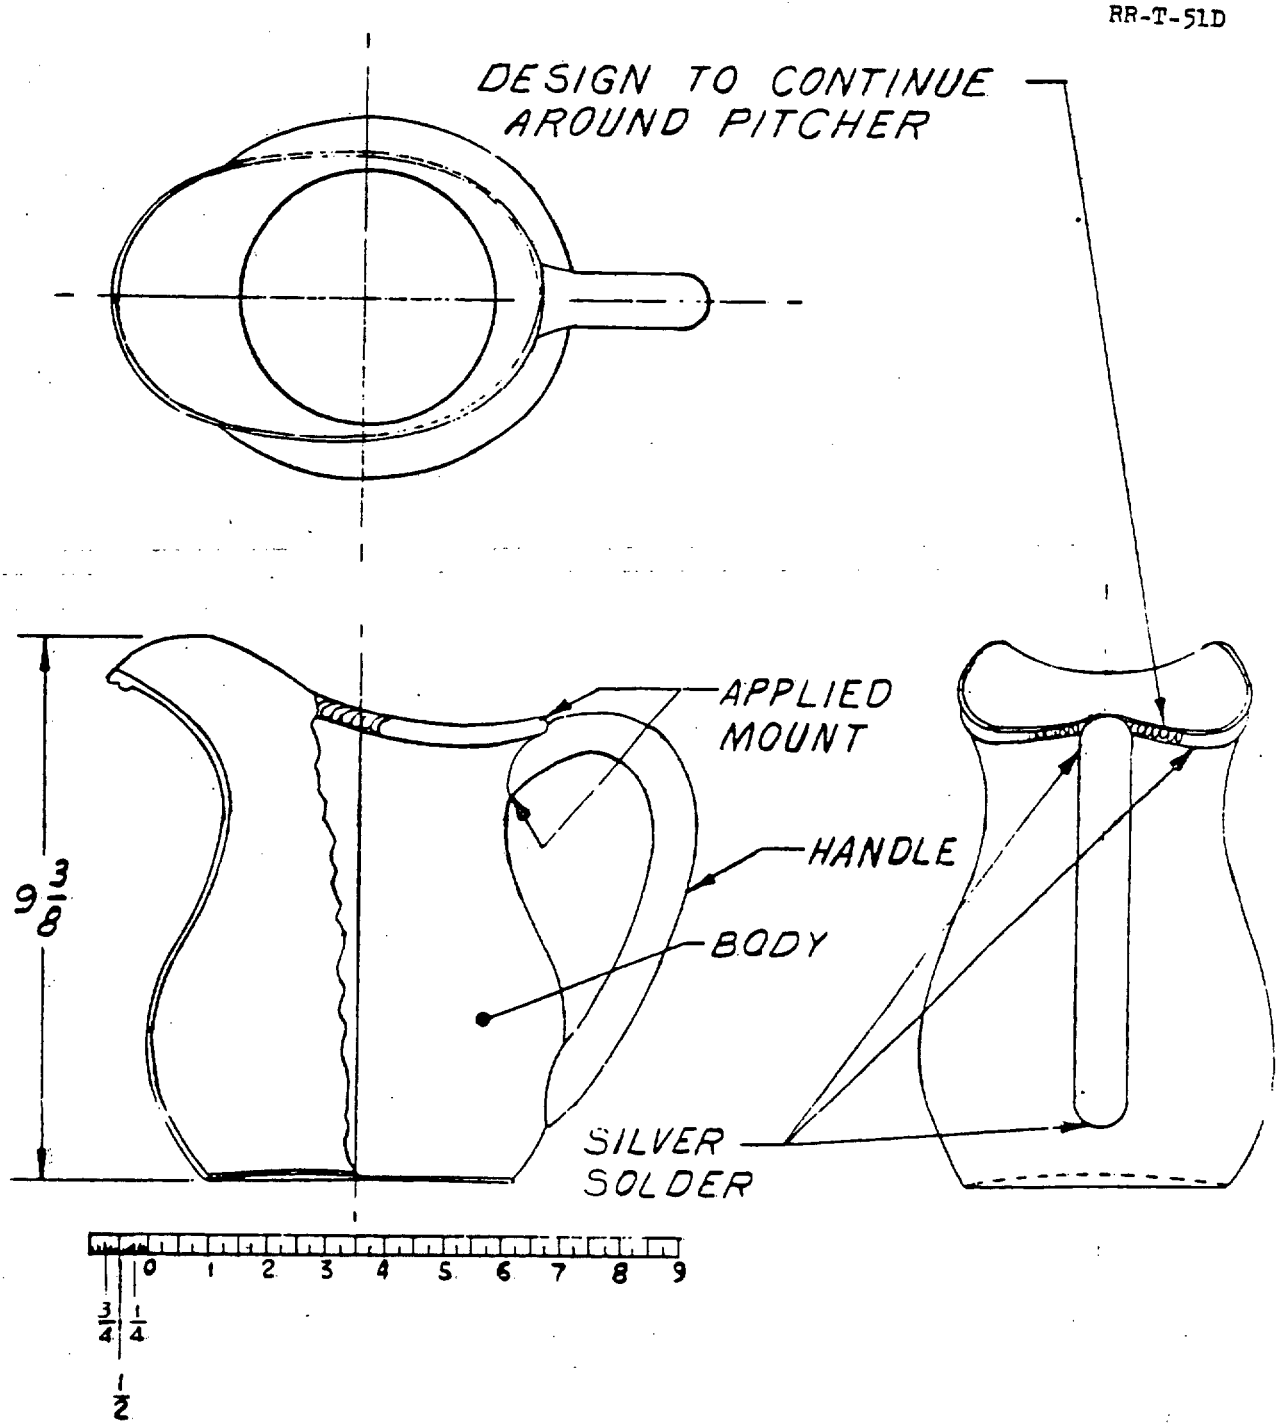


FIG. 11 - PITCHER, WATER 3 1/2 QUART

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

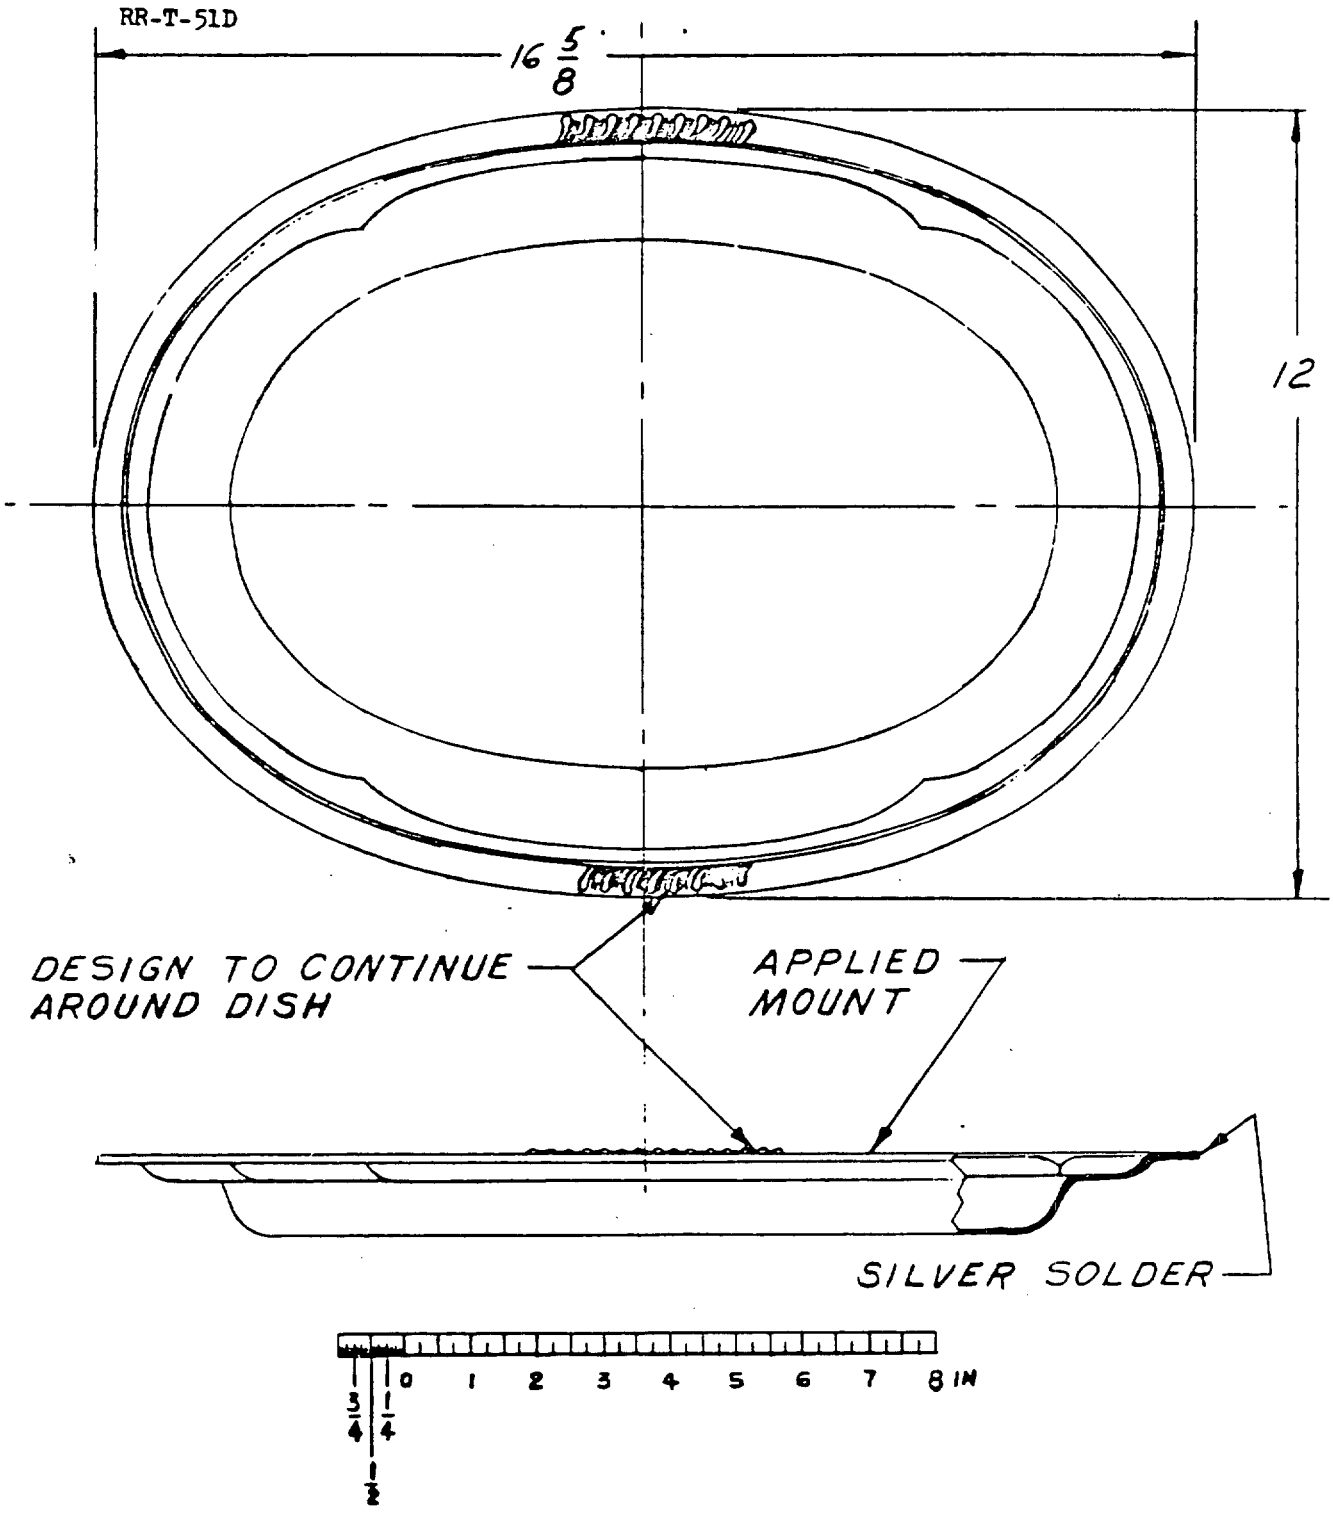


FIG 12 PLATTER, FOOD SERVING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

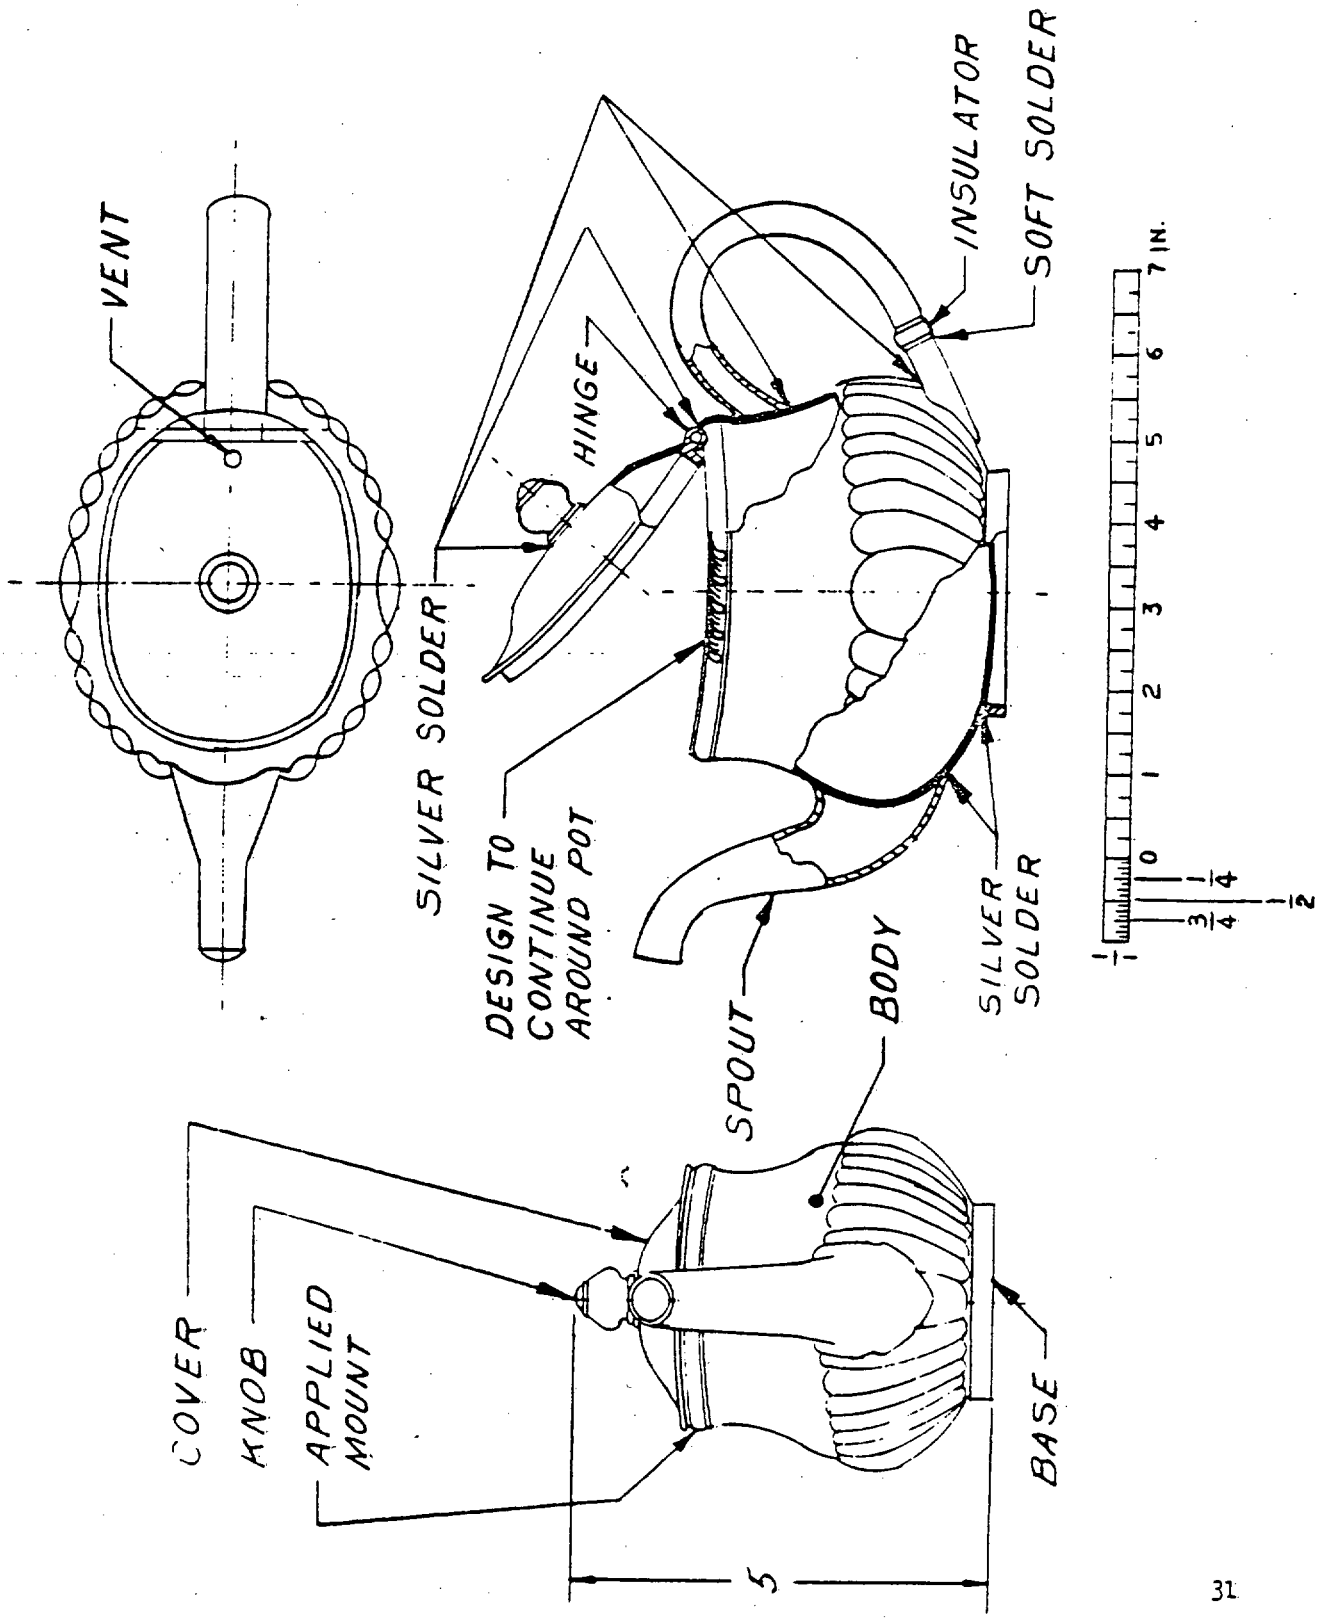


FIG.13 TEAPOT, SERVING, SMALL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

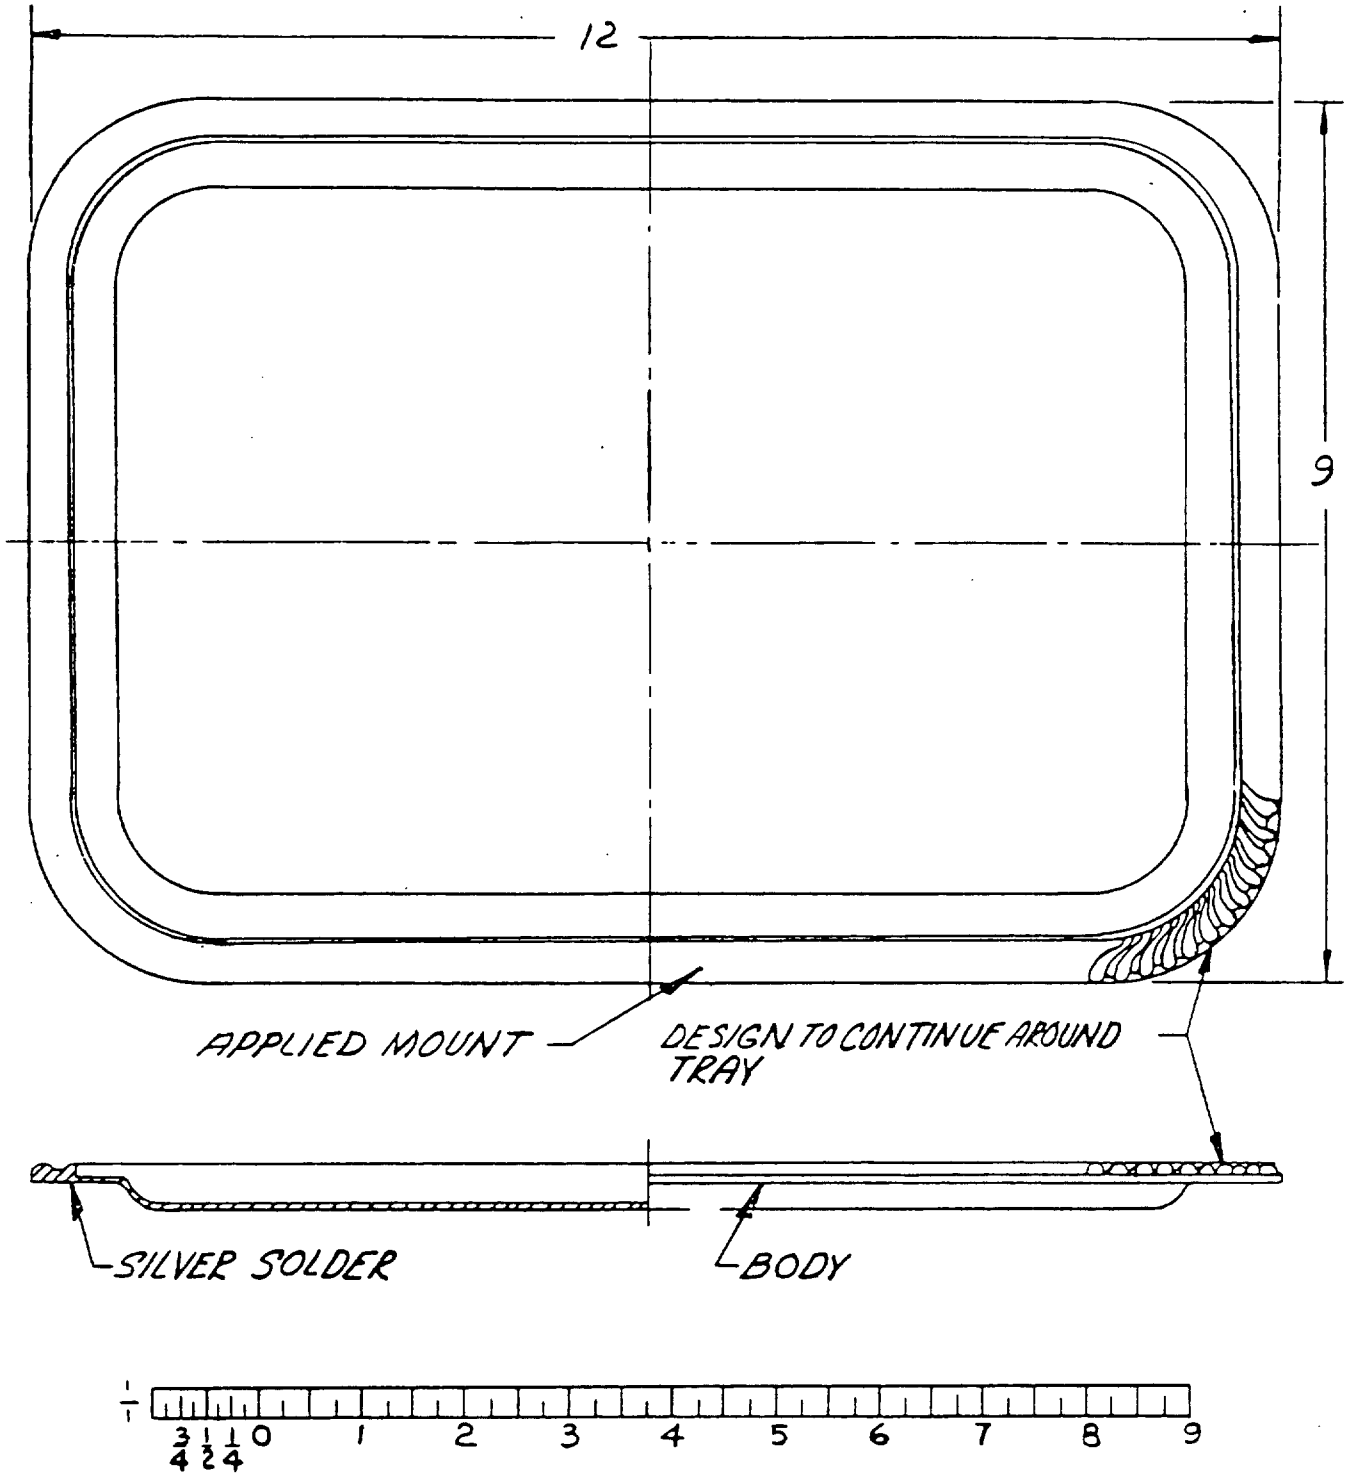


FIG 14 TRAY, SERVICE 12 INCH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.


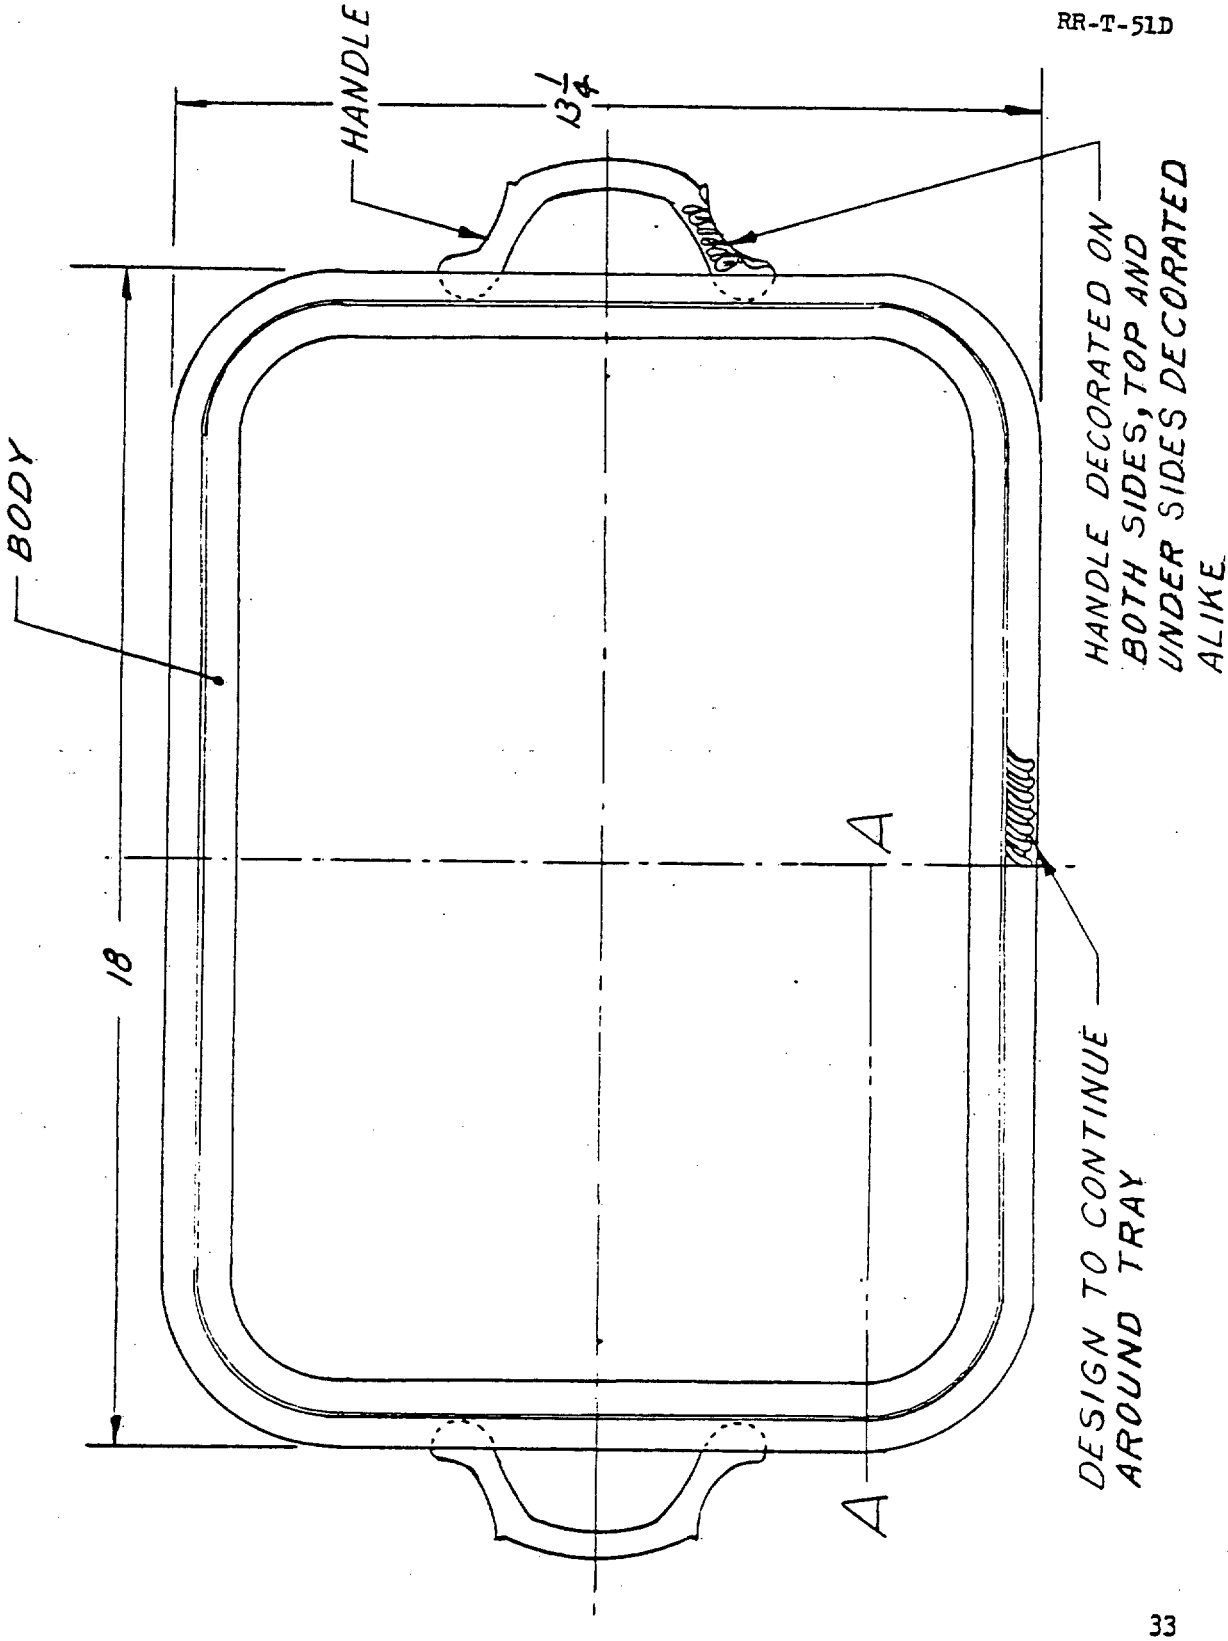


FIG. 15 – TRAY, SERVICE 18 INCH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

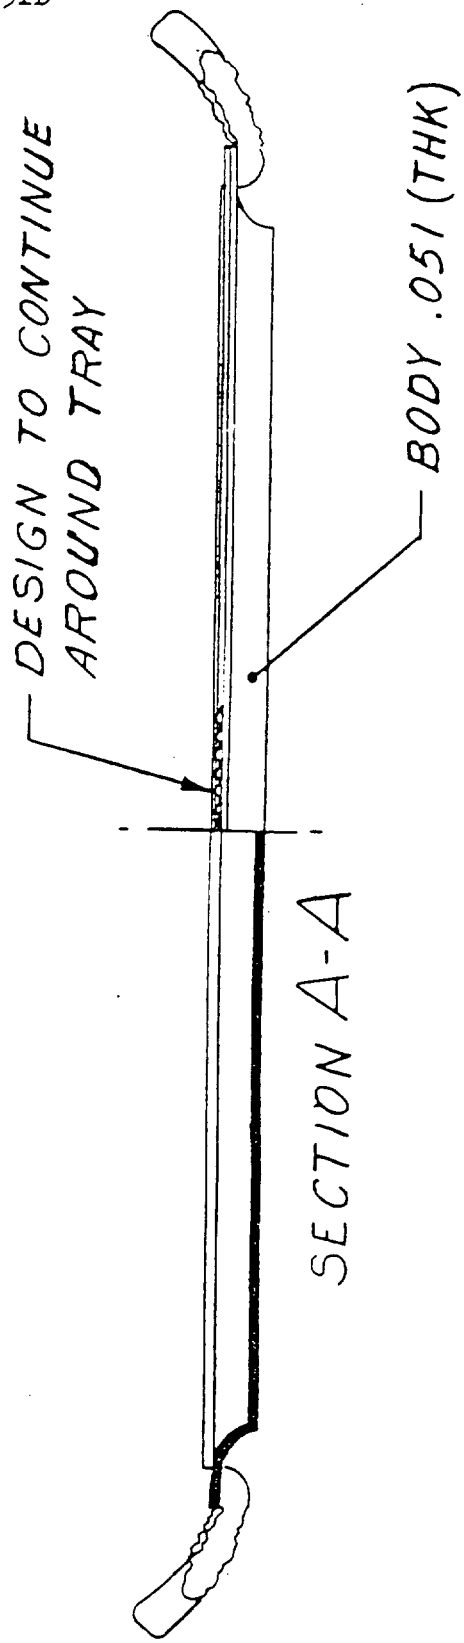

SECTION A-A

FRONT VIEW

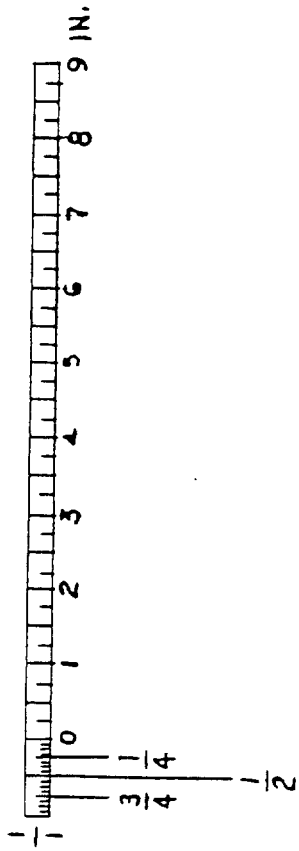


FIG 15A TRAY SERVICE 18 INCH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.


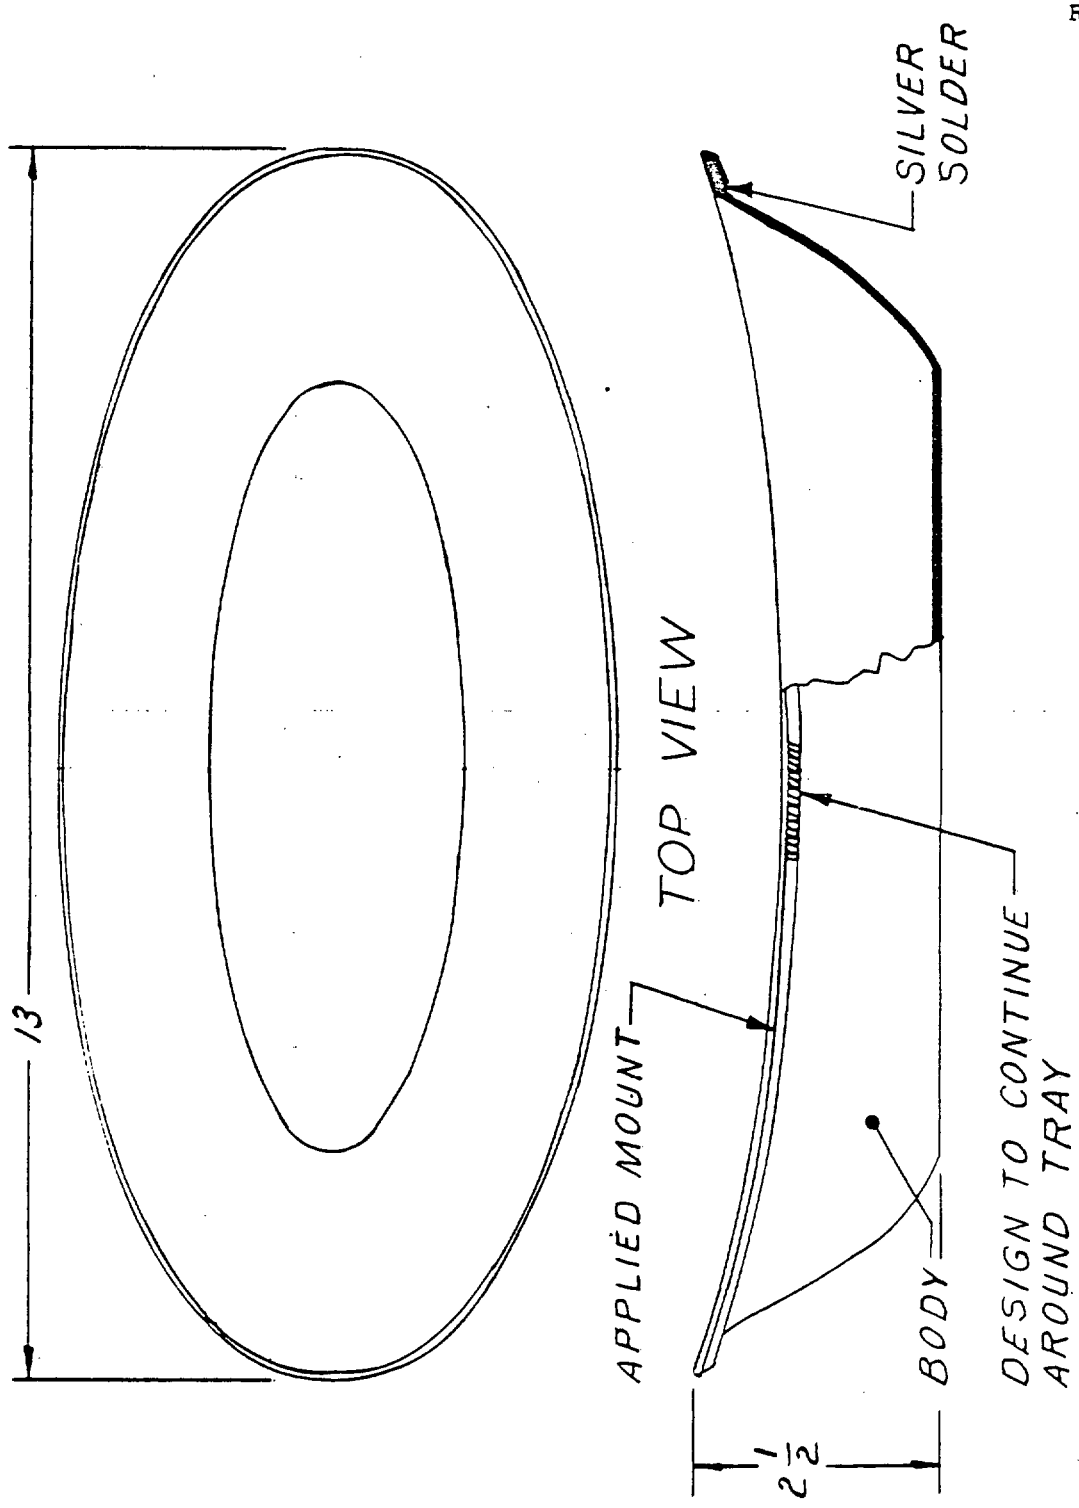


FIG 16 - TRAY, BREAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

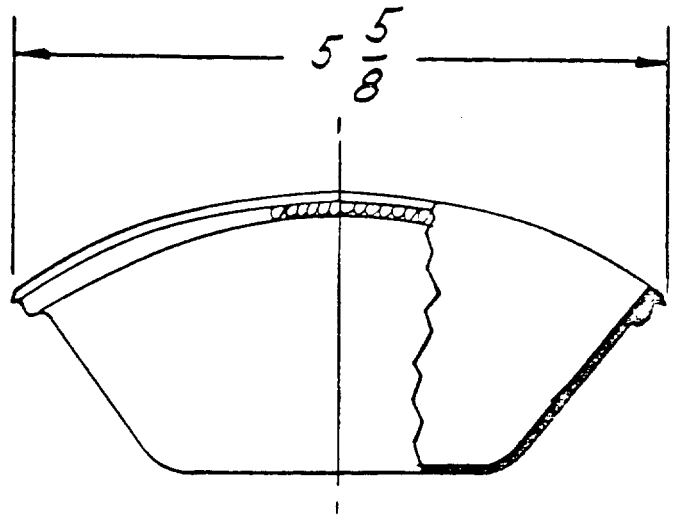

SIDE VIEW

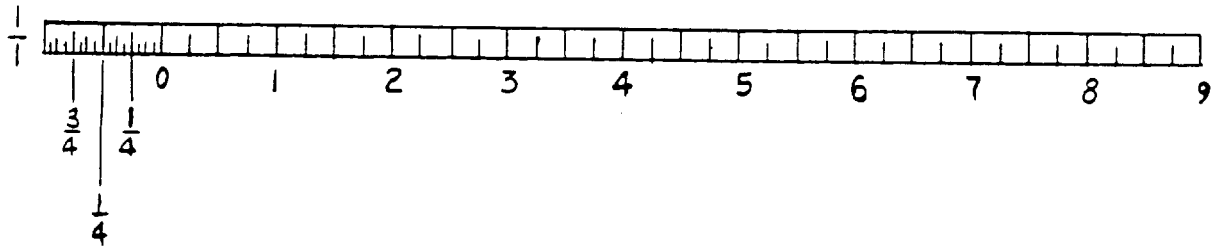


FIG 16A TRAY, BREAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

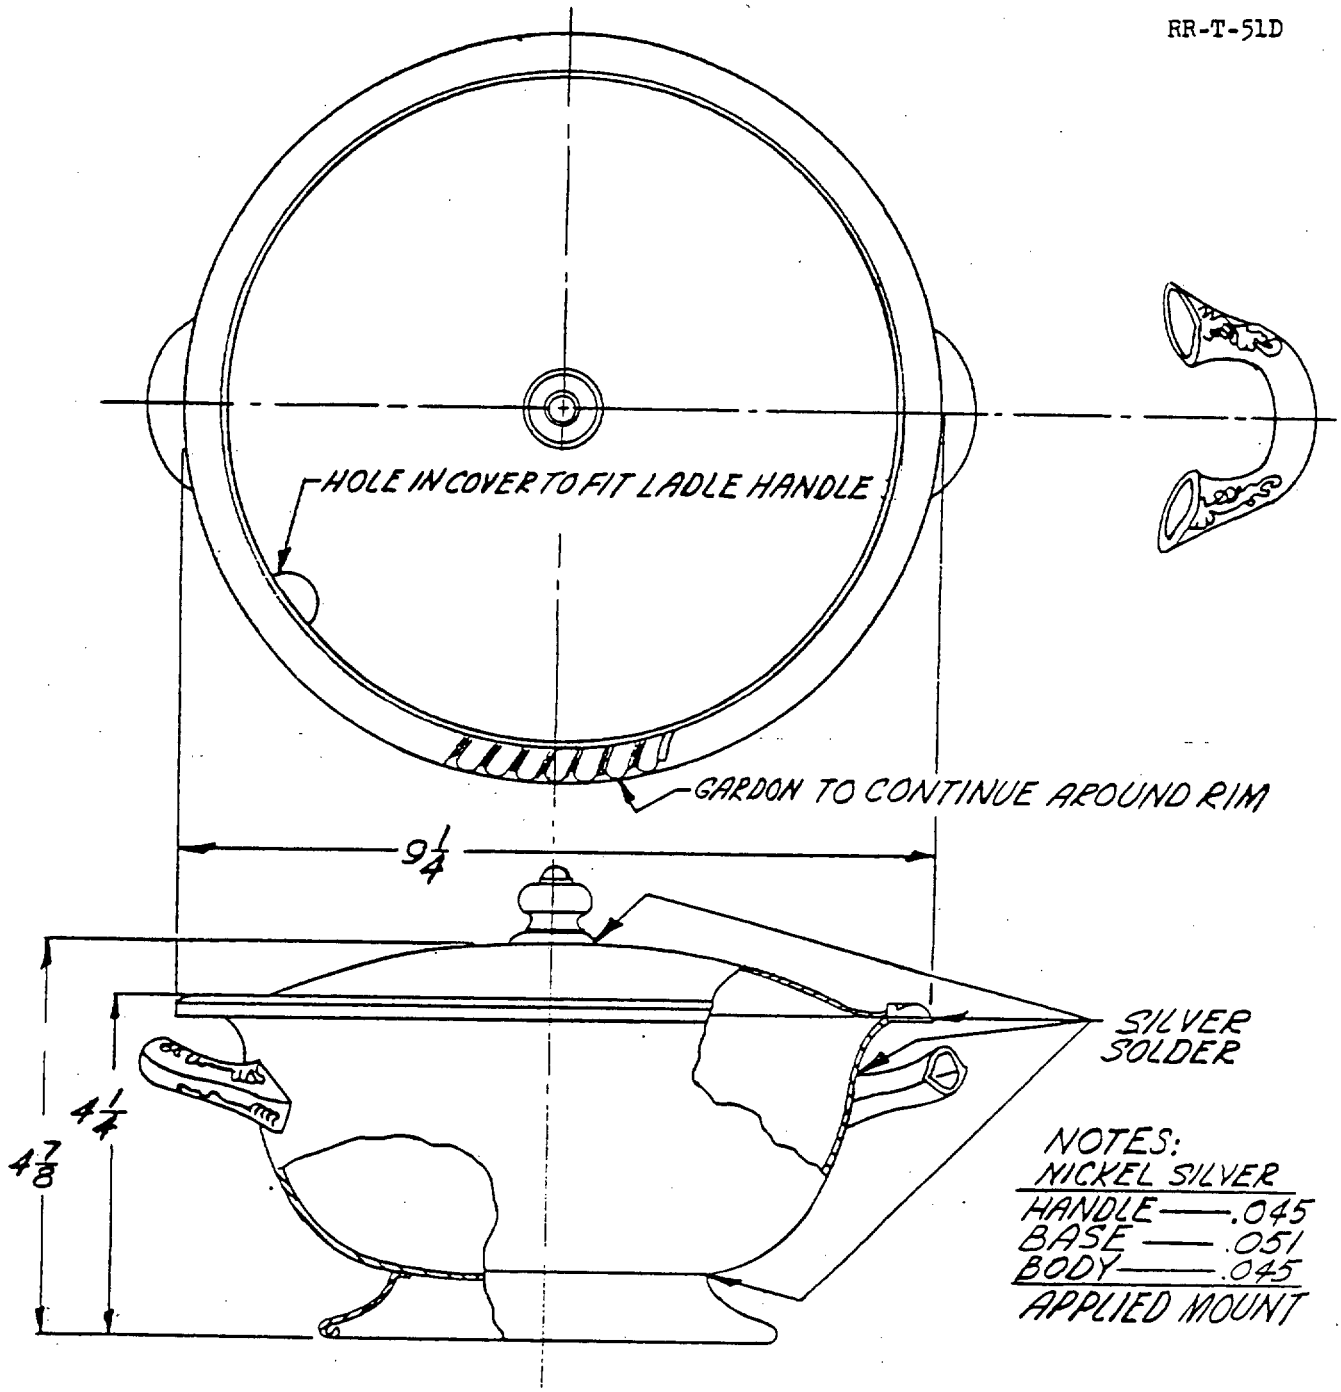
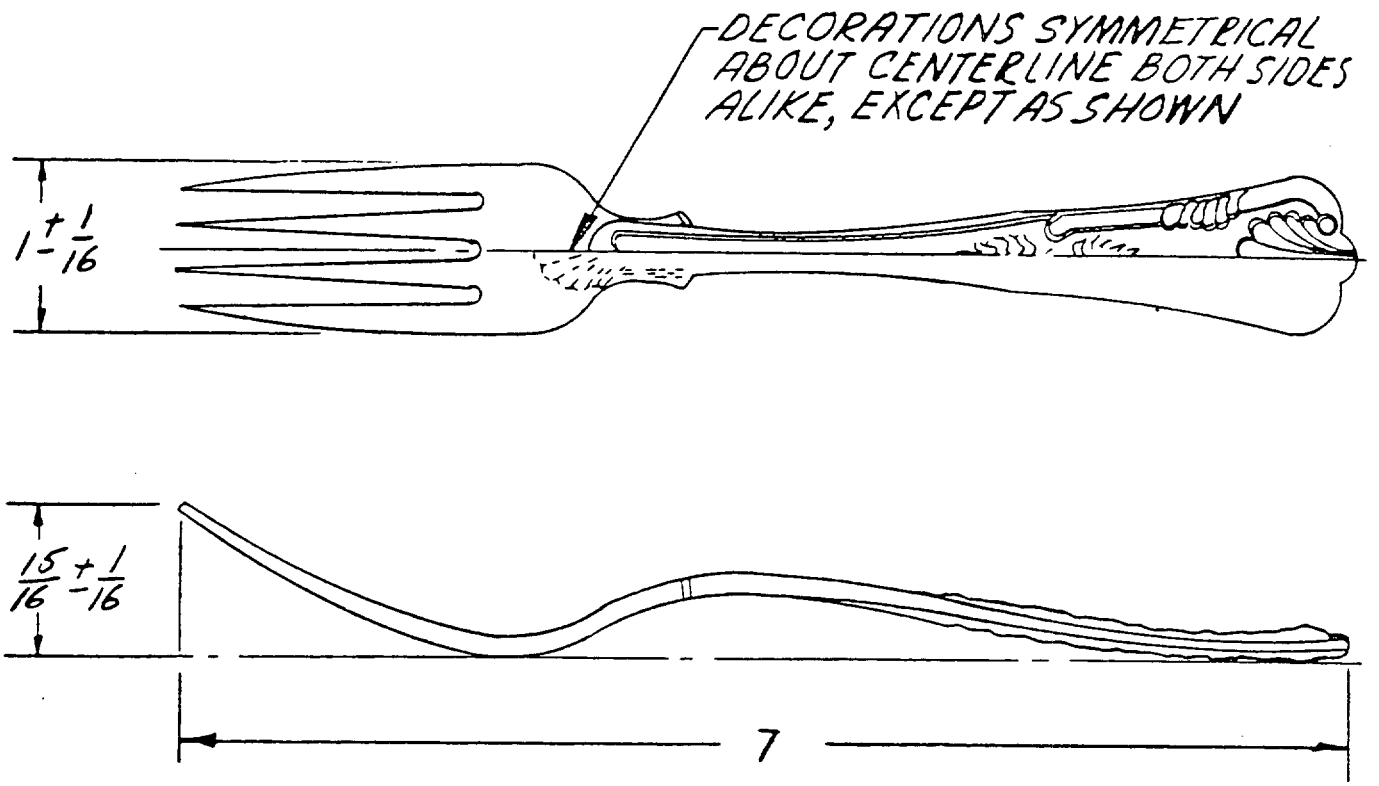


FIG 17 TUREEN, SOUP W/COVER, 64 OZ CAPACITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.



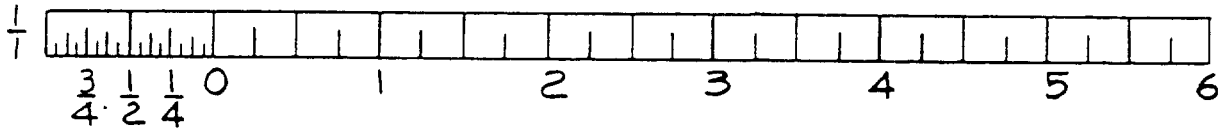
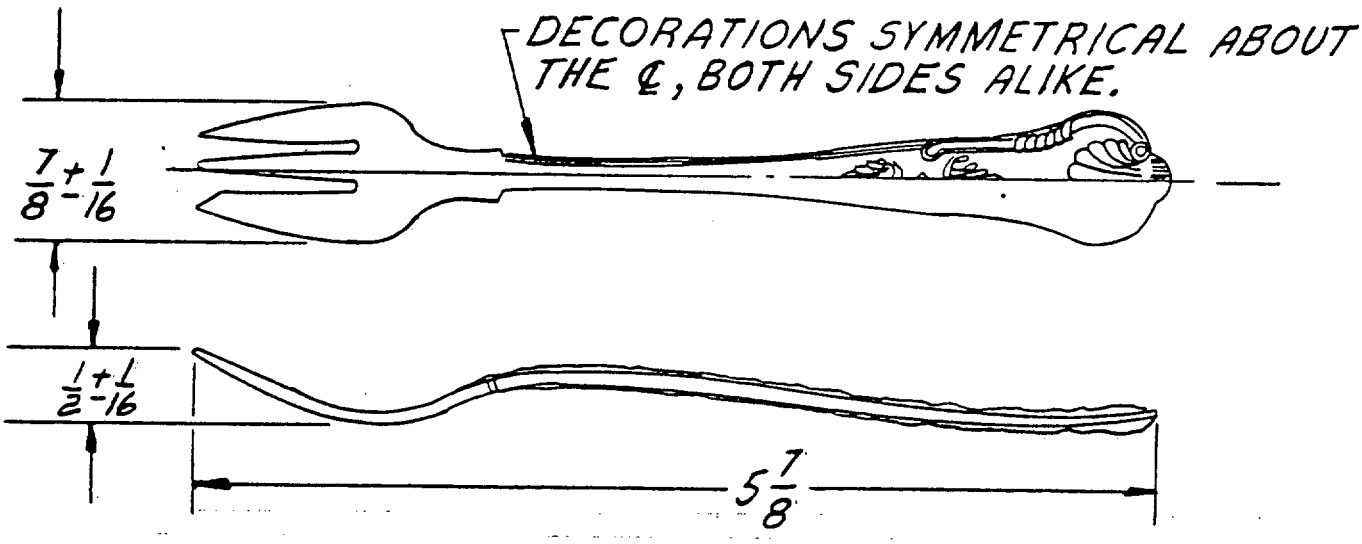


FIG. 18 FORK, DESSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.



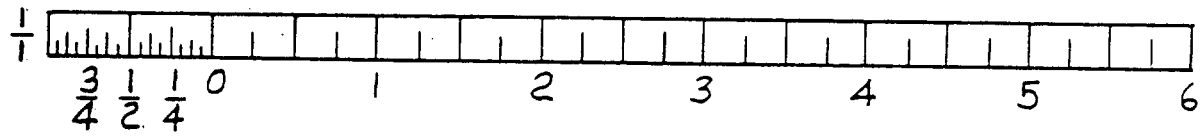


FIG 19 FORK, OYSTER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

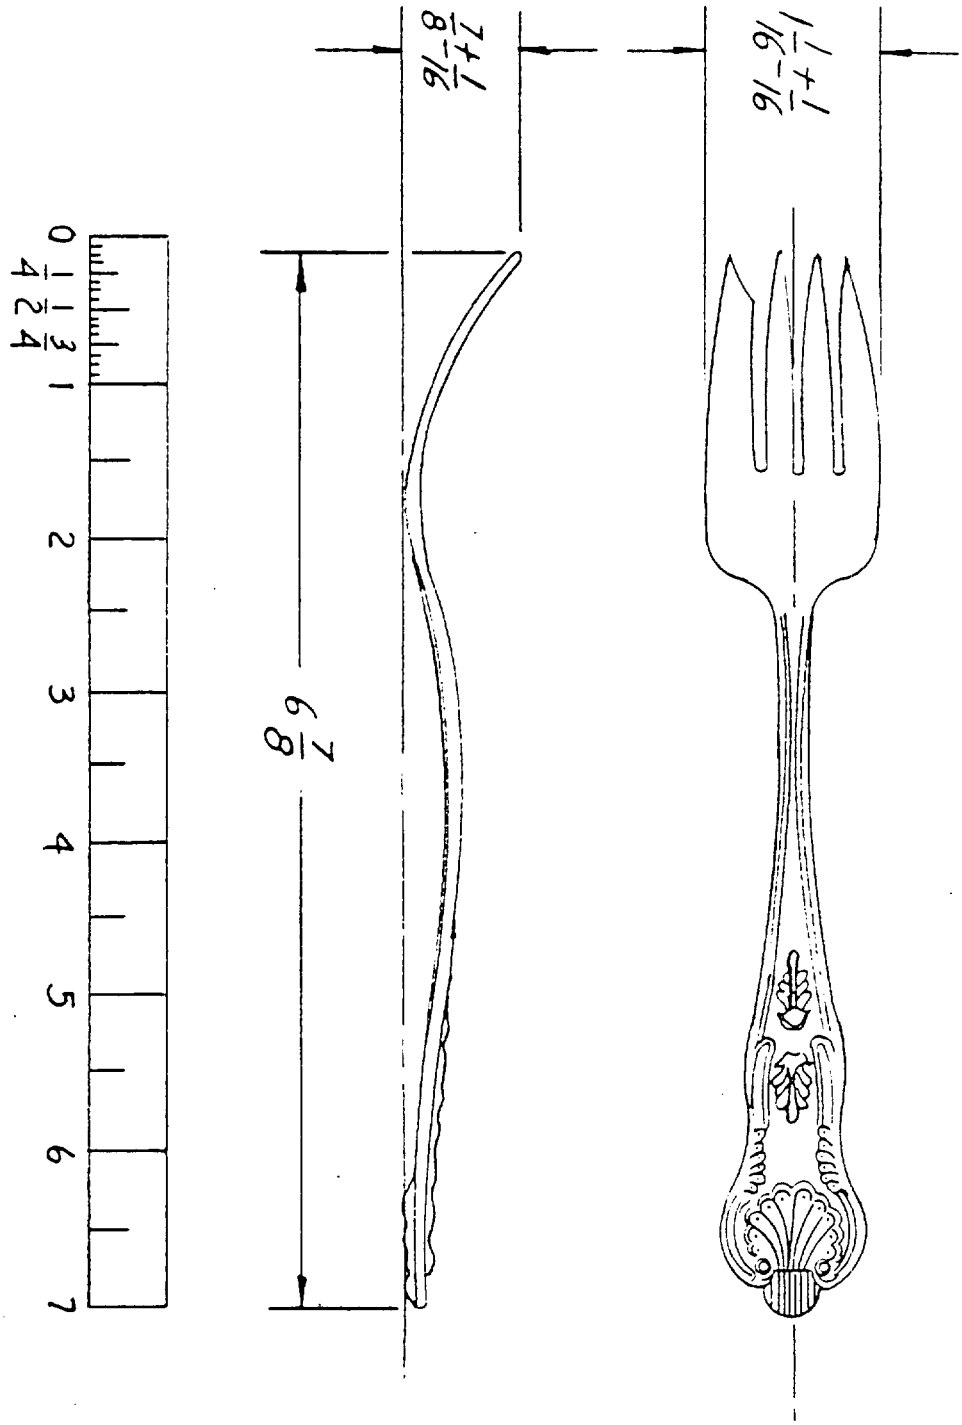


FIG 20 FORK, SALAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

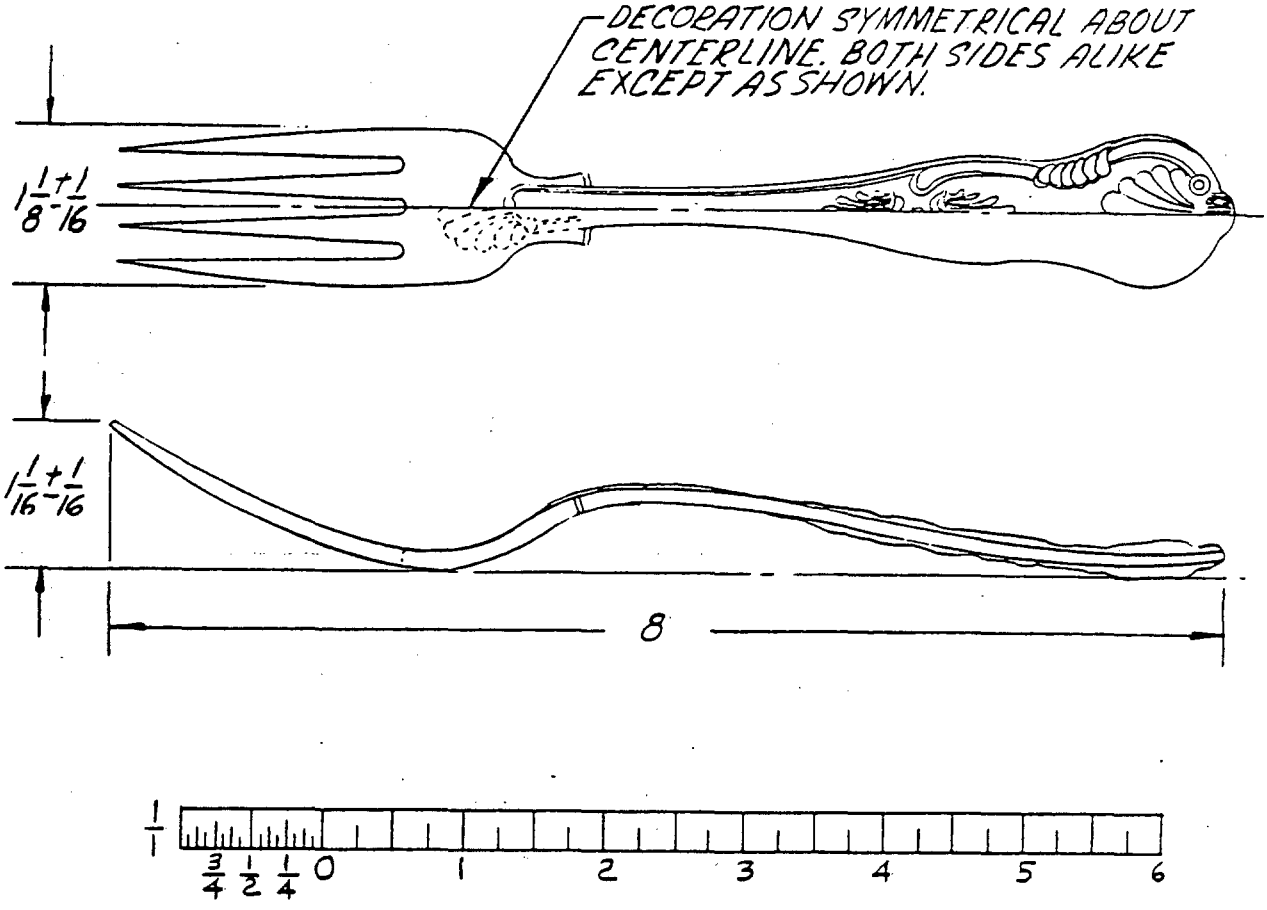


FIG 21 FORK, TABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

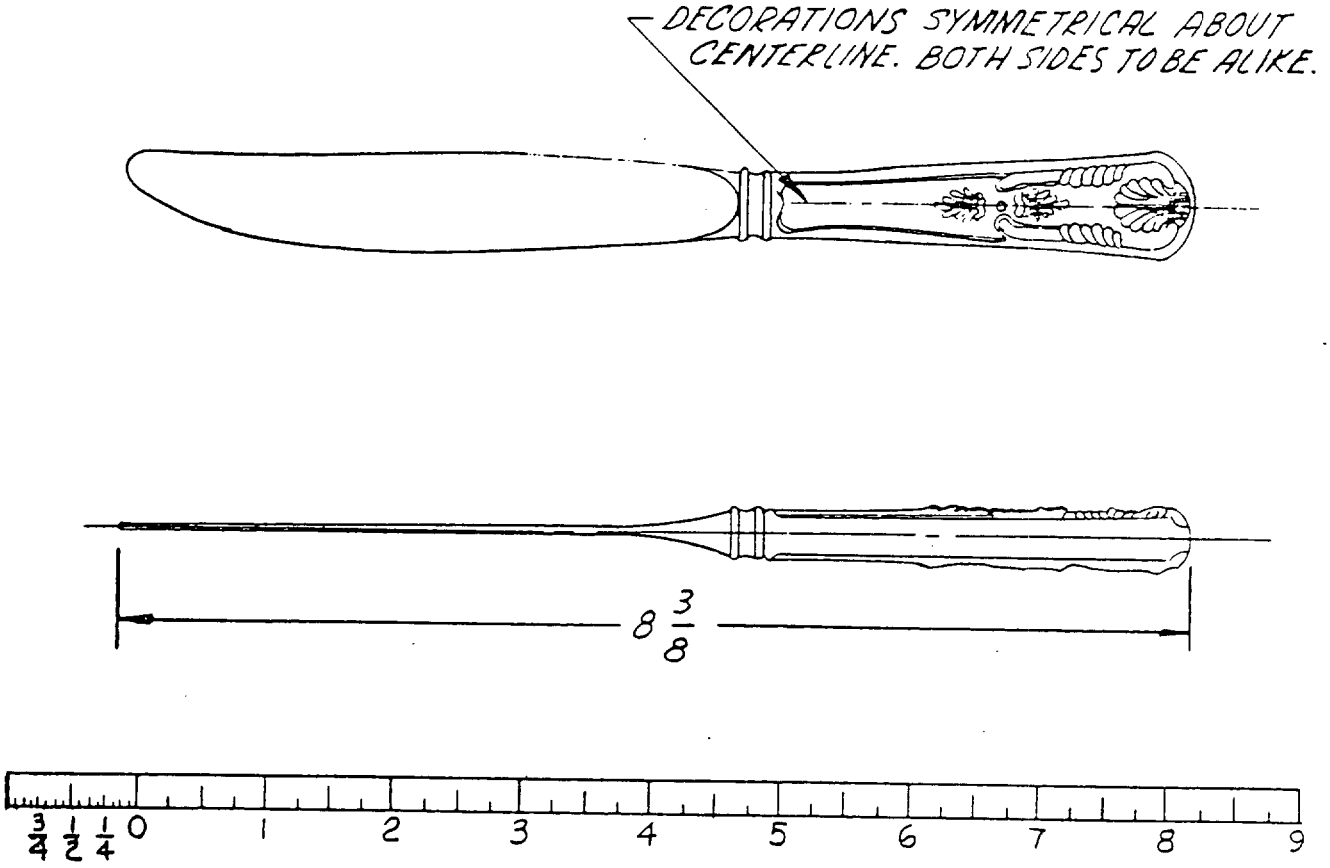


FIG 22 KNIFE, DESSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

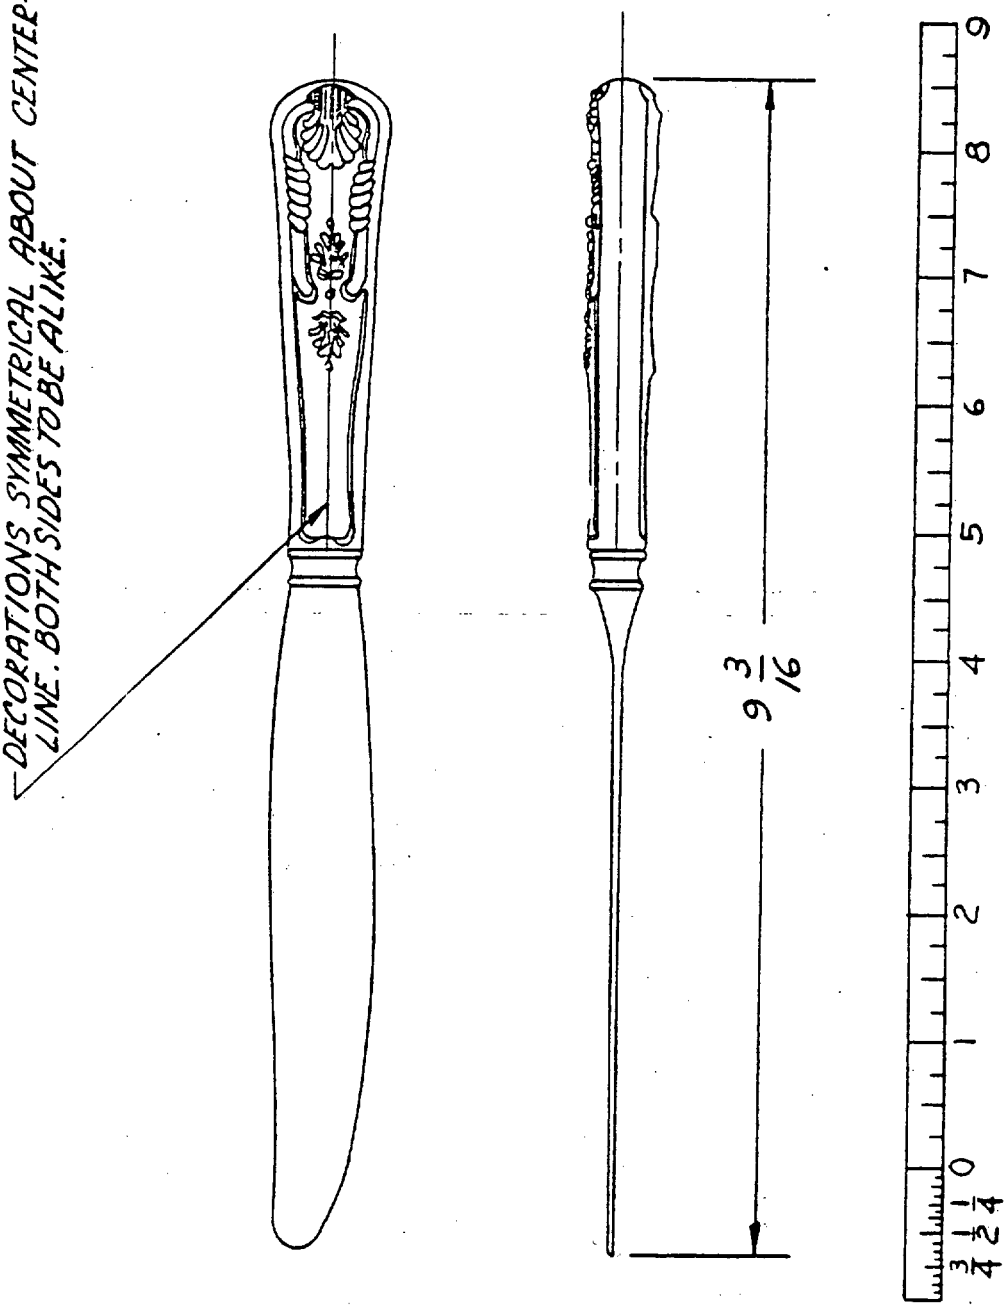
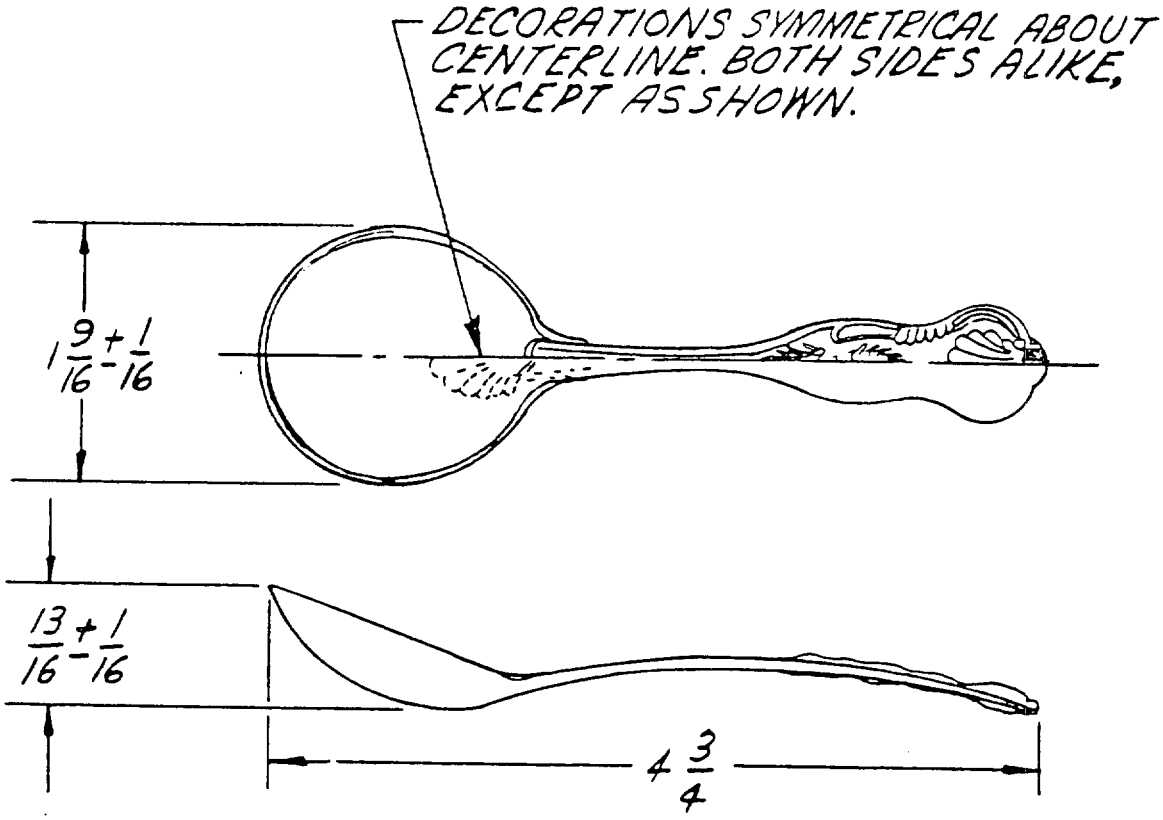


FIG 23 KNIFE, TALBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.



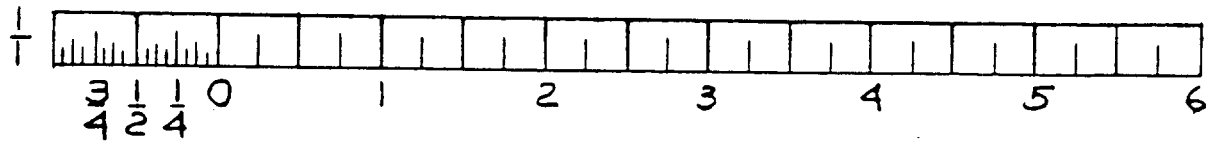
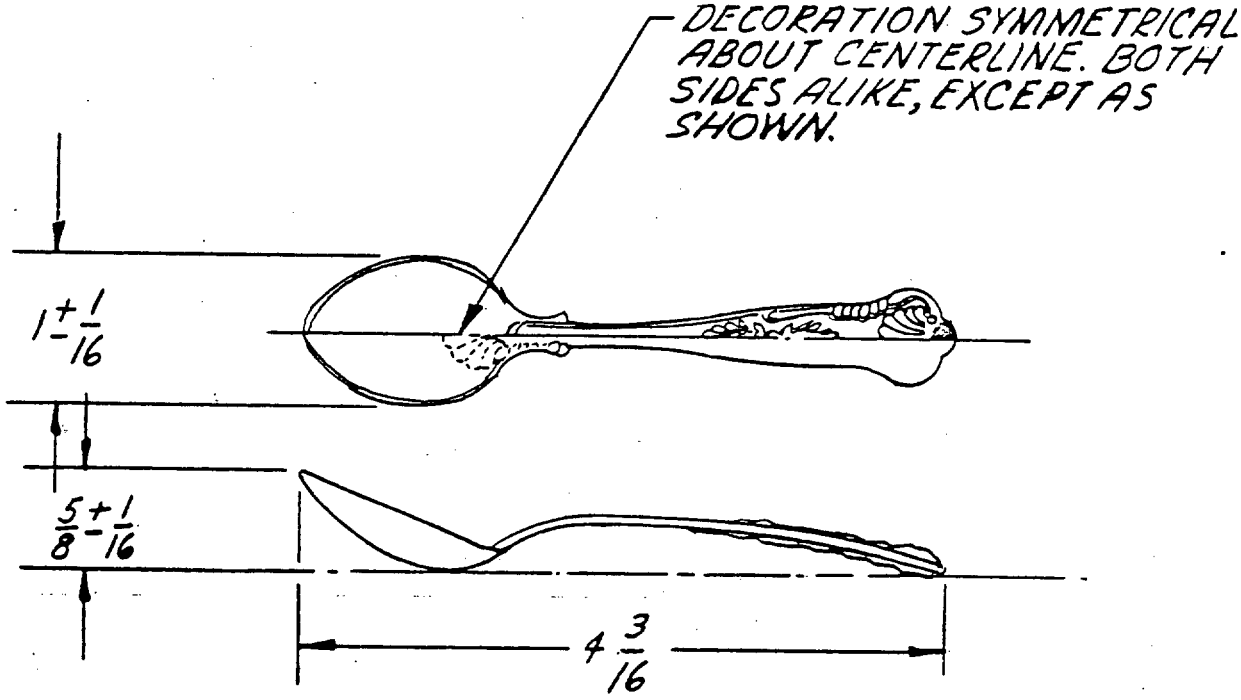


FIG. 24 SPOON, BOUILLON

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.



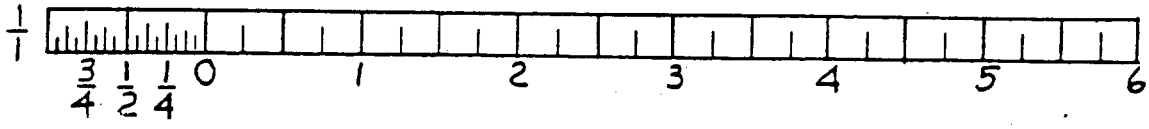


FIG. 25 SPOON, DEMITASSE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

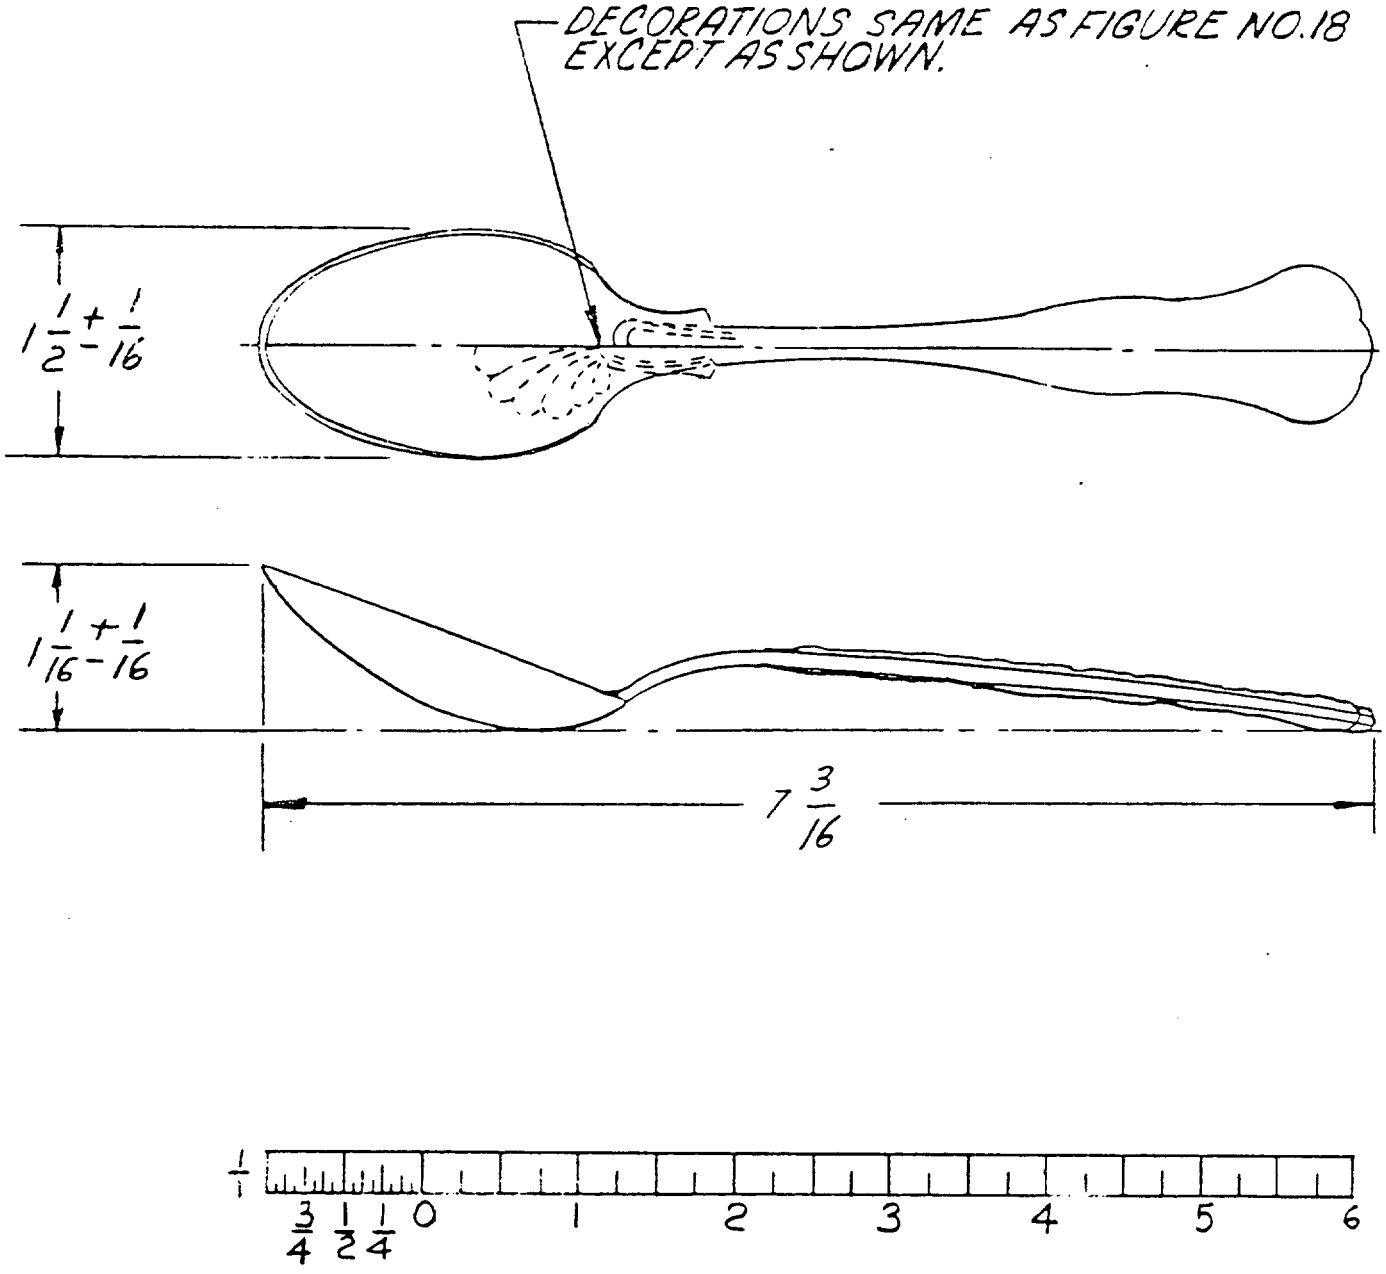
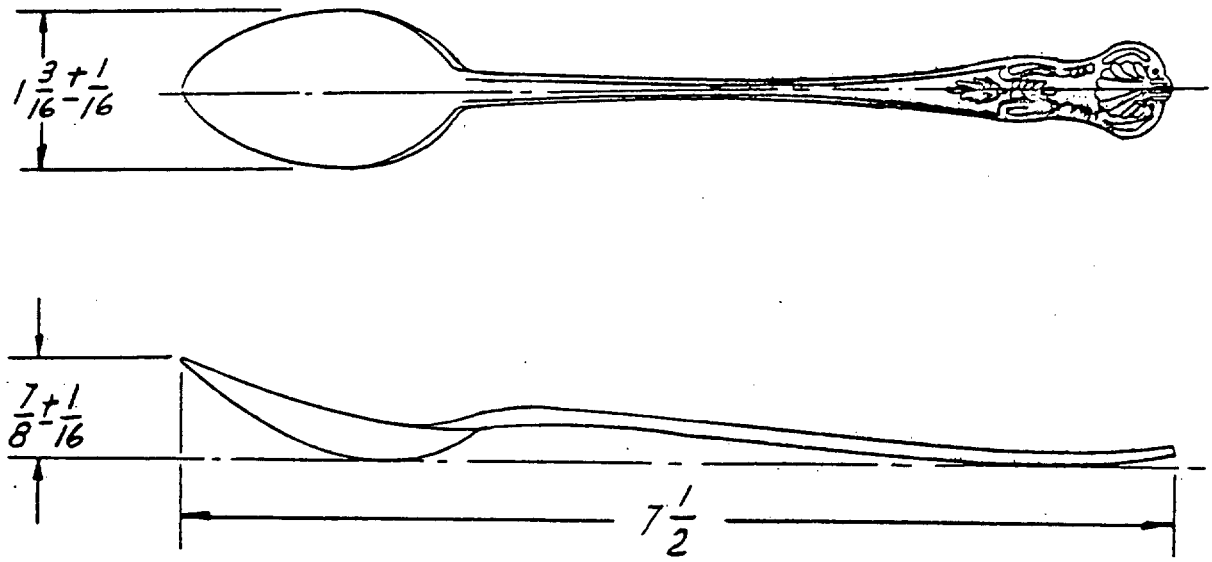


FIG. 26 SPOON, DESSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.




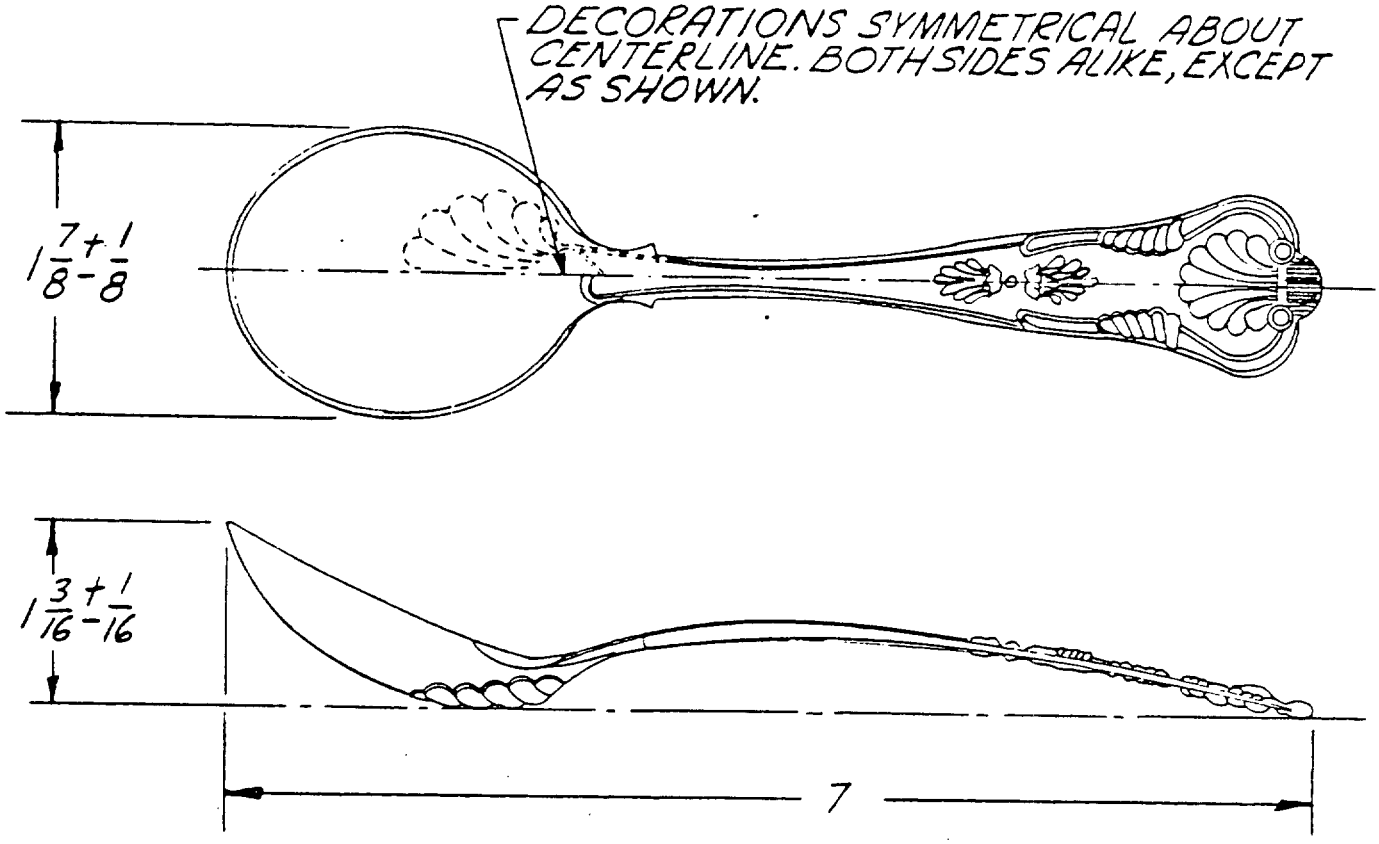


FIG. 27 SPOON, ICED TEA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.





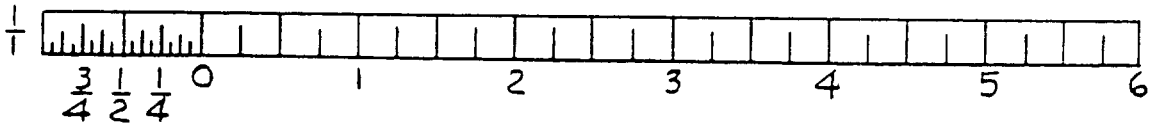


FIG. 28 SPOON, SOUP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

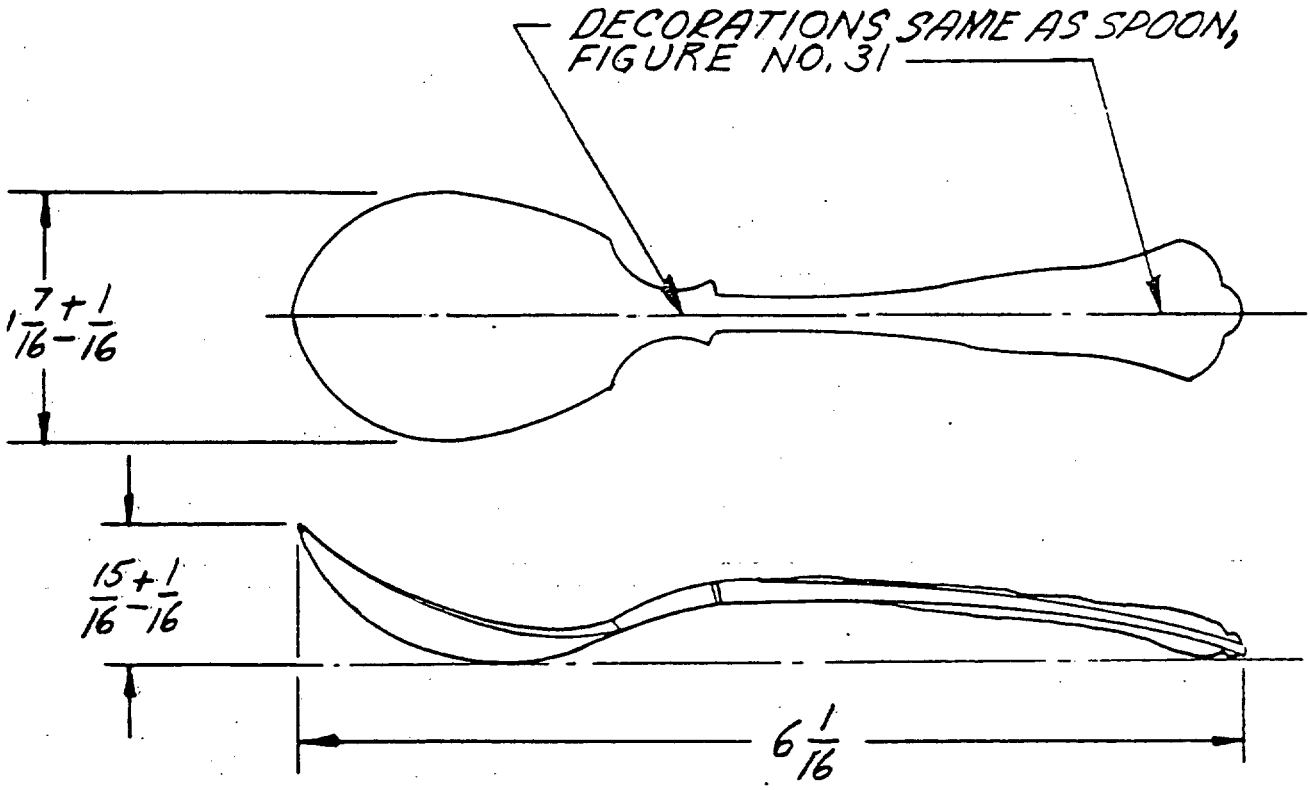

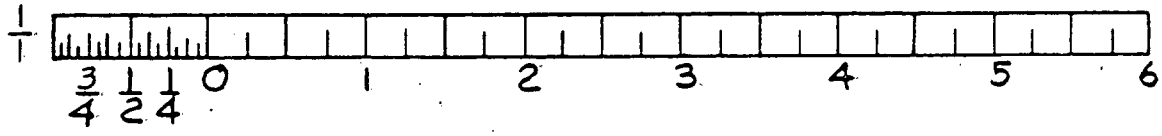

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

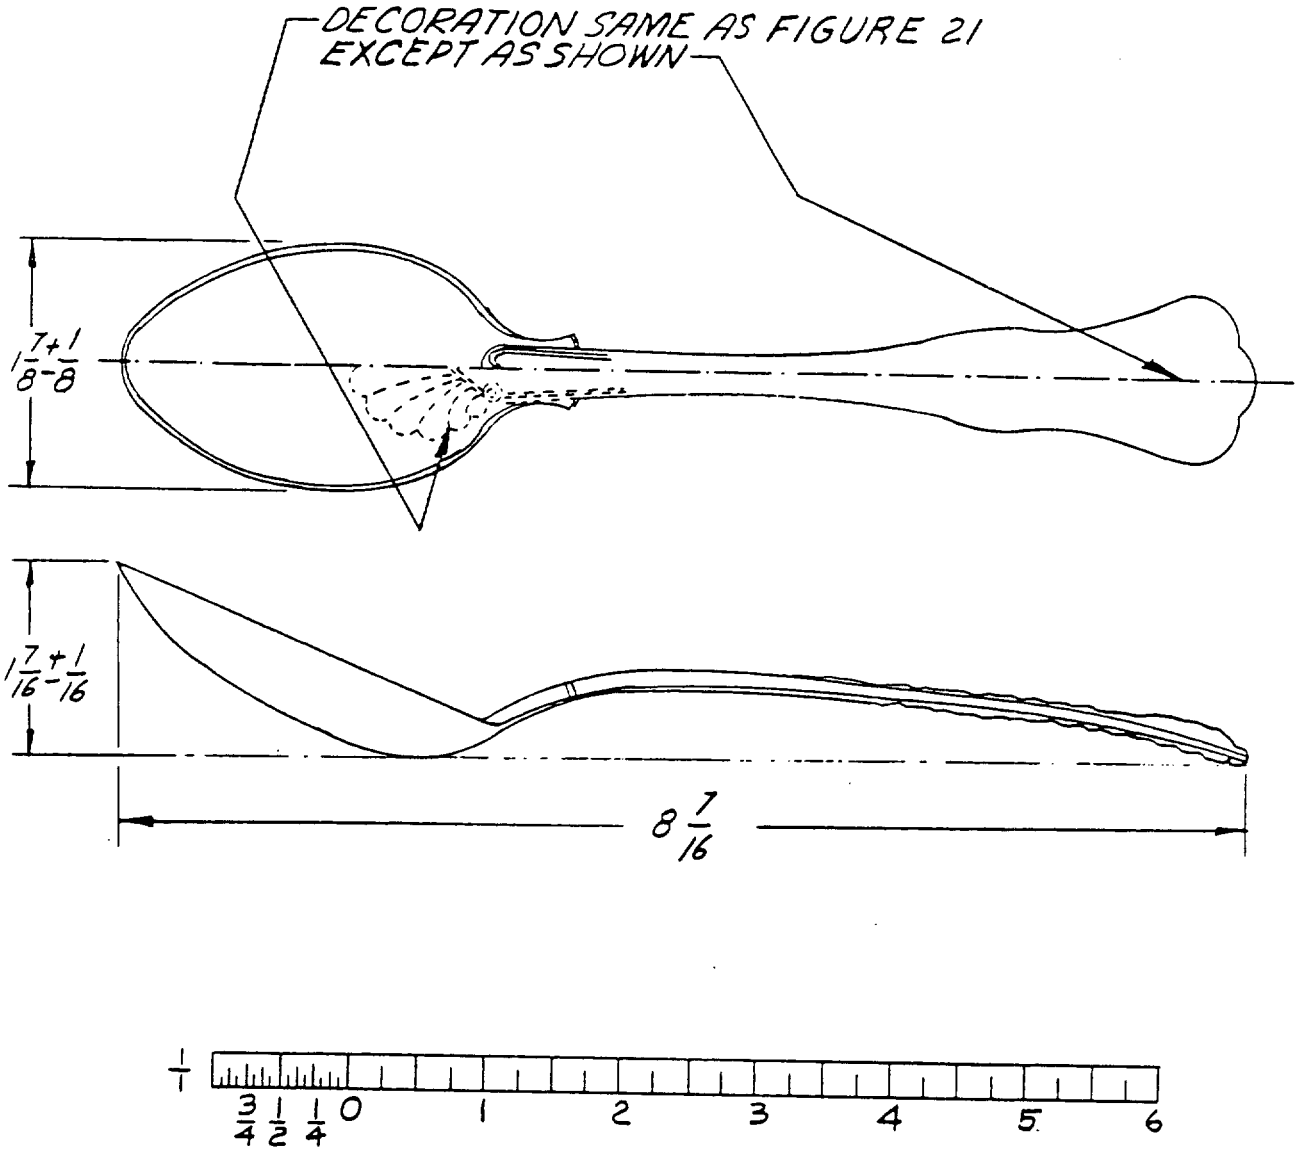
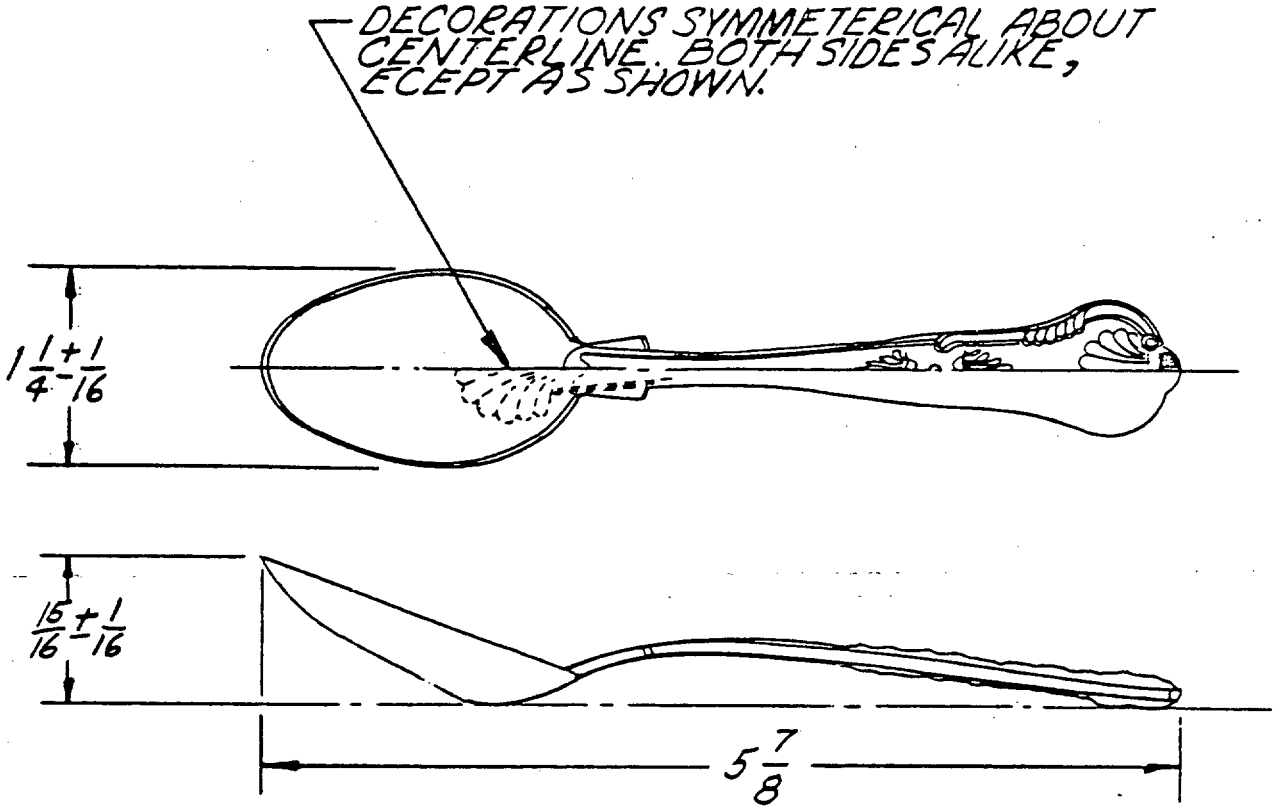


FIG 30 SPOON, TABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.



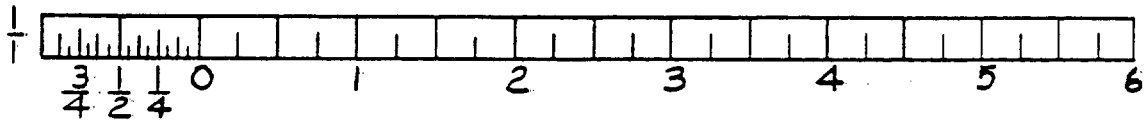


FIG 31 SPOON, TEA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

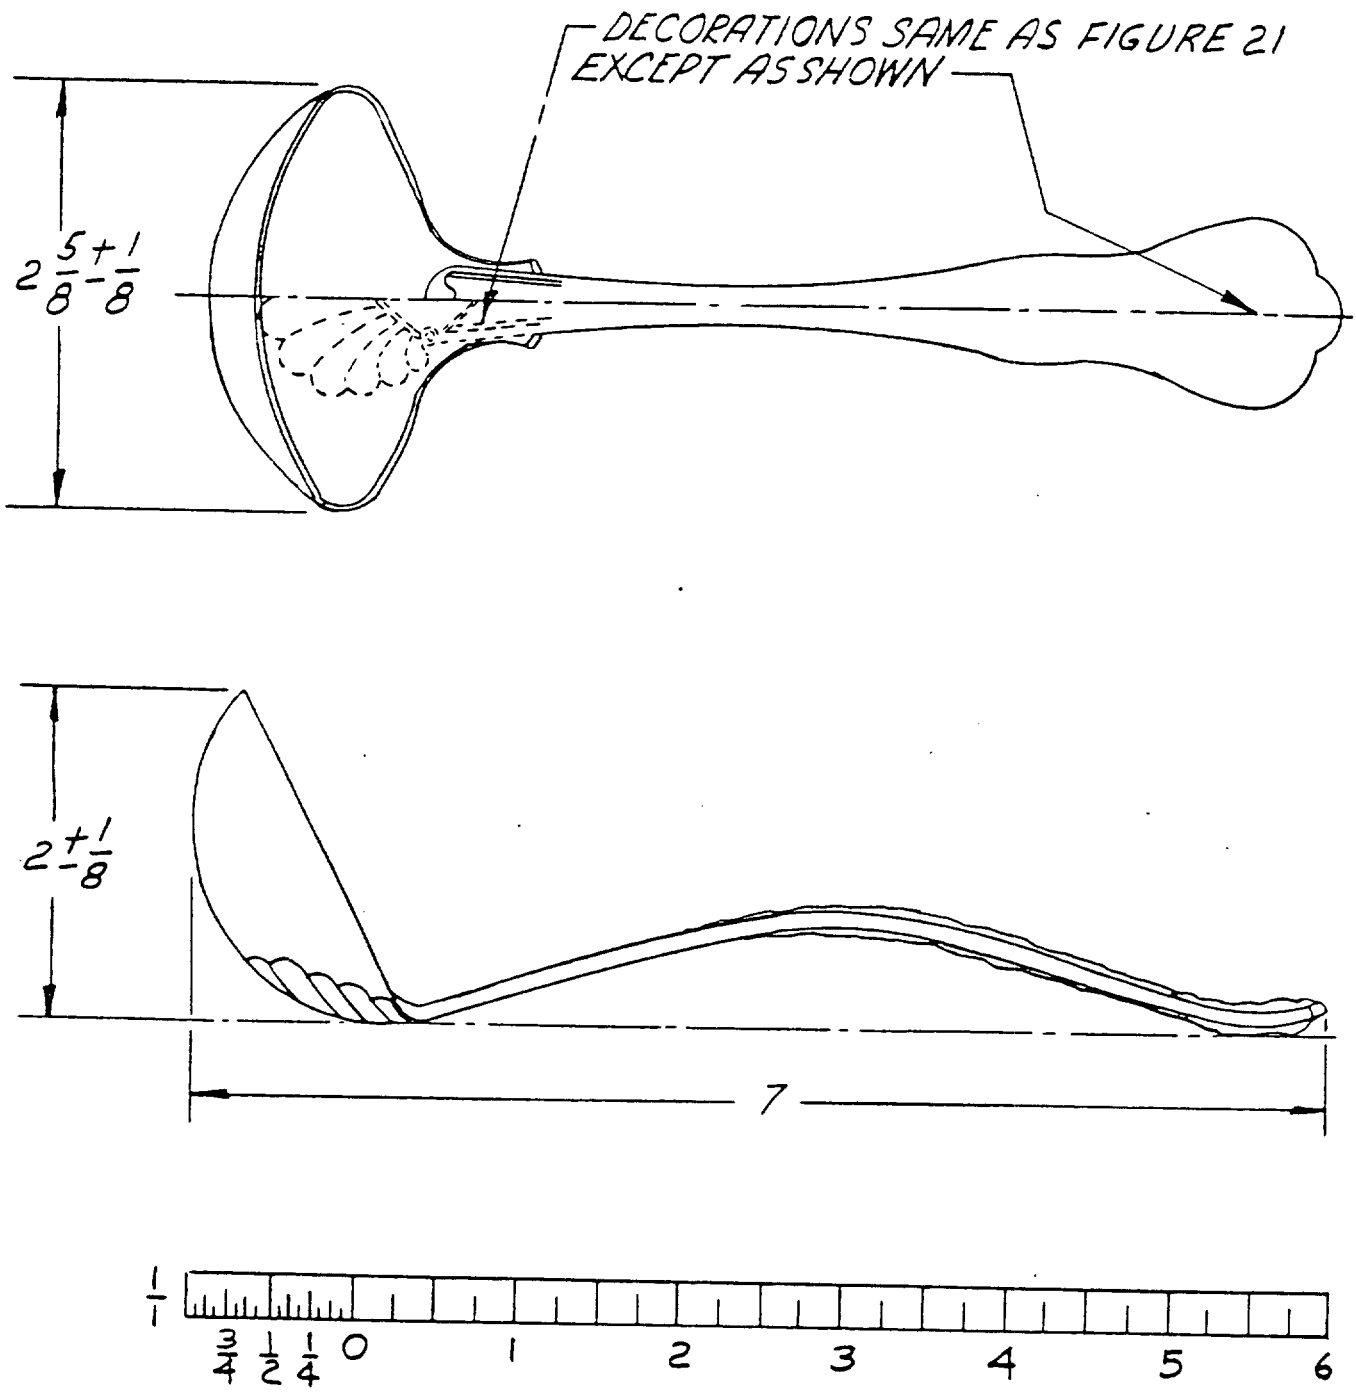


FIG. 32 LADEL, GRAVY, TABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 84

Review activities:

Army - MD
Navy - MS

User activities:

Navy - CG, MC

Preparing activity:

Army - GL

Civil Agency Coordinating Activities:

GSA-FSS
VA-DMS

Project No. 7350-0140

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 45 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Natick Development Center
ATTN: AMXNM-EPS
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

☆ U.S. GOVERNMENT PRINTING OFFICE: 1973—714-866/3983 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.