A-A-1282A
March 31, 1989
SUPERSEDING
A-A-1282
September 3, 1980

COMMERCIAL ITEM DESCRIPTION

SORBENT, OIL (ENCLOSED)

The General Services Administration has authorized the use of this Commercial Item Description (CID) in preference to MIL-S-28600(YD) in part.

Abstract. This CID covers oil sorbents for pickup of small oil spills. The oil sorbents shall be of the following types and classes:

Type I - Boom
Type II - Pillow

Class 1 - Reusable
Class 2 - Nonreusable

Salient characteristics. The sorbents shall be nontoxic to aquatic life, and shall not pollute waters or shorelines, or react with oil.

1. Tensile strength (cover). The cover material enclosing the sorbent shall have a minimum tensile strength in both principal directions of 11.1 kg per 2.5 percent cm width for type I and 5.5 kg per 2.5 percent cm width for type II, in dry state and after being saturated with oil in accordance with ASTM D 828.

2. Tensile strength (member and fastener). The strength member and fastener of type I sorbent shall have a minimum tensile strength of 272 kg using the Instron Tester or equivalent.

Beneficial comments (recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: Commanding Officer, Naval Facilities Engineering Command, Code 156, Port Hueneme, CA 93043

FSC 9330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

3. Floation. The sorbent shall not sink when a sample of the assembled sorbent (complete with enclosing mesh, strength members and fastner) is placed in tap water for a period of one hour.

4. Oil adsorption ratio. (All types and classes) The oil adsorption ratio shall be not less than 11 g of No. 2 Fuel Oil per gram of sorbent, and the sorbent shall retain its original form when tested in accordance with ASTM F 726. Class 1 reusable sorbents shall be reused a minimum of 5 times while retaining its original form, and maintain no less than 60 percent of its oil adsorption capacity.

5. Water adsorbency. (All types and classes) The water adsorbency ratio shall be a maximum of 1 g of water per gram of sorbent, and shall be tested in accordance with ASTM F 726. The sorbents shall not sink below the water surface. Class 1 sorbents shall be tested only once.

6. Fire Resistant. The sorbent in its unused dry state shall be rated as resistant to flammability in accordance with ASTM D 2859.


7. Ignition temperature. The sorbent shall have a self-ignition temperatuare greater than 150 degrees Centigrade (° C) when tested in accordance with ASTM D 1929.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, quality assurance pracatices, and is the same as the product offered for sale in the commercial market place. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-50 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. The packaging, packing, and marking shall be in accordance with ASTM D 3951.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. Part numbers shall be determined as follows:

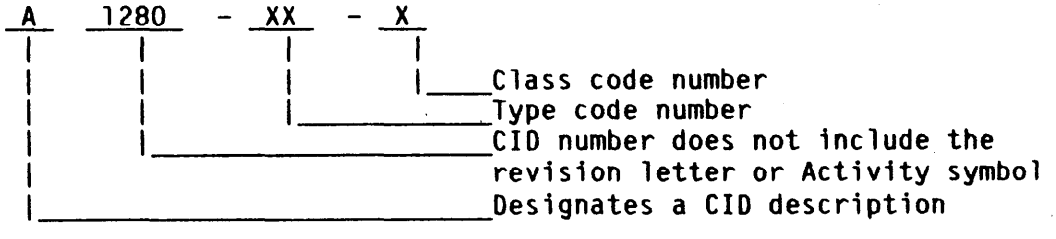

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Notes.

ASTM standards are available from the ASTM, 1916 Race Street, Philadelphia, PA 19103.

In order to aid in the selection of a type, the recommended use of each type is provided below.

Type I - Oil sorbent in roll form is recommended for use on shorelines, as well as open water.
Type II - Oil sorbent sweeps are recommended for use over a large area for control, collection and pickup of oil.
Type III - Oil sorbent pads are recommended for use in shallow waters, in congested areas, and along rocky shorelines.

The above types shall be class 1 - Reusable or class 2 - Nonreusable.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 84

Review Activities

Navy - AS
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY:
Navy - YD

Project 9330-1056

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.