A-A-2316
September 27, 1985

COMMERCIAL ITEM DESCRIPTION

FILE, HAND (AMERICAN PATTERN), MILL

The General Services Administration has authorized the use of this commercial item description in preference to Type XIII, Classes 1, 3, and 4 and Class 2, Styles A, B, and C of Federal Specification GGG-F-325.

This commercial item description covers hand files used for general purpose filing and sharpening mill saws.

Salient characteristics:

Material:	Carbon alloy steel.
Width:	Tapered at least one-third of the length to the point (except for the blunt file which shall be uniform from heel to point).
Thickness:	Uniform or tapered slightly from heel to point (except for the blunt file which shall be uniform from heel to point).
Design:	Single-cut on each flat (one set of parallel cuts on the surface).
Styles:	Furnished in the following styles as shown in table: Blunt (special crosscut) - square edges, single-cut (Figure 1). Regular - square edges, single-cut (Figure 2). Two Round Edges - two semicircular edges, single-cut (Figure 3). One Round Edge - one semicircular edge, single-cut and one square edge, single-cut (Figure 4).
Tang:	Of a conventional shape and size suitable for attachment to a wood handle. Tempered to a maximum hardness of 45 on the Rockwell C scale at a point approximately midway of its length and width.
Teeth:	Uniformly cut or etched and of uniform height throughout the fully cut portion. Cutting surfaces hardened to a uniform hardness. The distance between the heel and point of the file, excluding the tang, shall be hardened to not greater than 68 nor less than 64 on the Rockwell C scale. Free from decarburization and brittleness.
Marking:	Marked with the country of origin and the name of the manufacturer, or with a trademark of such known character that the source of manufacture may be readily determined.
Workmanship:	The teeth of the file shall be well-defined, sharp, and uniform in height and form. There shall be no evidence of rust or other defect which may impair serviceability, durability, or appearance.

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:21Z
Check the source to verify that this is the current version before use.




FIGURE 1
Blunt (Special Crosscut)




FIGURE 2
Regular

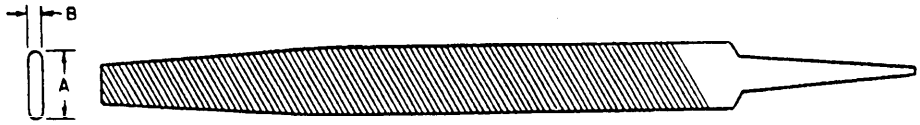


FIGURE 3
Two Round Edges

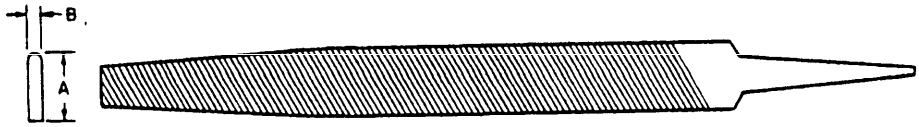


FIGURE 4
One Round Edge

National Stock Number	Length Inches	Dimensions at largest section A Inches	Dimensions at largest section B Inch	Number of teeth per inch Flats Min.	Flats Max.	Edges Min.	Edges Max.	Allowable distortion (maximum) Inch	Allowable warpage (maximum) Degrees
Blunt (Special Crosscut) Bastard-cut									
5110-00-973-8401	6	5/8	1/8	48	52	44	59	0.008	2
5110-00-585-2391	8	13/16	5/32	43	48	42	50	.010	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:21Z
Check the source to verify that this is the current version before use.

Regular
Bastard-cut

5110-00-560-5212	4	7/16	5/64	54	62	56	70	.006	2
5110-00-241-9132	6	5/8	1/8	48	52	44	59	.008	2
5110-00-242-5384	8	13/16	5/32	43	46	42	48	.010	2
5110-00-242-5385	10	1	3/16	38	41	38	44	.015	2
5110-00-242-5386	12	1-3/16	7/32	34	37	33	38	.015	2
5110-00-242-5387	14	1-11/32	1/4	30	33	31	34	.020	2

Second-cut

5110-00-241-9133	6	5/8	1/8	59	63	61	70	.008	2
5110-00-241-9134	8	13/16	5/32	50	53	52	61	.010	2
5110-00-203-4556	10	1	3/16	44	47	46	54	.015	2
5110-00-241-9140	12	1-3/16	7/32	39	42	41	48	.015	2
5110-00-241-9143	14	1-11/32	1/4	34	37	36	43	.020	2

Smooth-cut

5110-00-243-7965	6	5/8	1/8	68	74	72	81	.008	2
5110-00-241-9135	8	13/16	5/32	56	62	60	71	.010	2
5110-00-241-9138	10	1	3/16	51	56	54	64	.015	2
5110-00-203-4645	12	1-3/16	7/32	45	50	48	57	.015	2
5110-00-241-9166	14	1-11/32	1/4	39	43	42	49	.020	2

Two Round Edges
Bastard-cut

5110-00-203-9432	8	13/16	5/32	43	46	42	48	.010	2
5110-00-618-2719	10	1	3/16	38	41	38	44	.015	2

One Round Edge
Bastard-cut

5110-00-293-0275	8	13/16	5/32	43	46	42	48	.010	2
5110-00-268-2896	10	1	3/16	38	41	38	44	.015	2

Length dimension: Measured from the point (free or front end) to the heel (junction of the tang with the body of the file) and have a tolerance of plus or minus 1/8 inch.

Tolerance: Width (A) - plus or minus 1/16 inch.
Thickness (B) - files 4 and 6 inches in length - plus or minus 1/32 inch. Files over 6 inches in length - plus or minus 1/16.

Regulatory requirements. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:21Z
Check the source to verify that this is the current version before use.