[INCH-POUND]
A-A-2887
January 10, 1995
SUPERSEDING
GGG-S-00275 (GSA-FSS)
October 21, 1965

COMMERCIAL ITEM DESCRIPTION

SHEARS, BARBERS'

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers barbers' shears for cutting and trimming hair.

2. SALIENT CHARACTERISTICS

2.1 Standard product. Except as otherwise specified herein, shears covered by this commercial item description shall be the manufacturer's standard commercial product.

2.2 Construction. Shears shall be designed with both blades pointed and furnished with double rings on the handles, a finger rest on one of the handles, and designed for a right-hand operator. The blades shall be joined together in accordance with commercial practice. The shears shall be a minimum of 7 inches (17.7 cm) in length and similar to Figure 1.

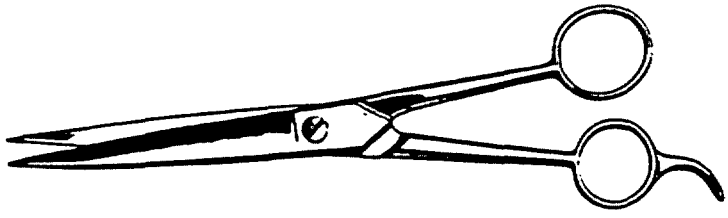


Figure 1

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 3590

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

2.3 Materials. Shears shall be either hot forged or cold forged carbon steel having a minimum carbon content of .55 percent. The contractor shall furnish certification that the chemical composition of each lot or batch of steel used in the manufacture of the shears meets the carbon content specified.

2.4 Blade hardness. When tested in accordance with ASTM E 18, shears made from hot forged carbon steel shall have a hardness on the Rockwell "C" scale not less than 50 nor more than 61. Shears made from cold forged carbon steel shall have a hardness on the Rockwell "15-N" scale not less than 85.5 nor more than 90.7. Readings shall be taken, prior to plating, within 1/8 inch (3.1 mm) from the cutting edge.

2.5 Finish. The blades and handles shall be completely finished with a nickel plated electrodeposited coating not less than 0.0002 inch (0.0051 mm) thick, except for the cutting edge and the inside of the blade (see 4.6.2).

2.6 Blade adjustment. The blades shall be adjusted for proper contact along the entire length of the blade cutting edges. The pressure between the blades shall not cause binding and the shears shall operate smoothly with a minimum of effort.

2.7 Identification marking. Each pair of shears shall be marked in a plain and permanent manner with the manufacturer's name or trademark.

2.8 Workmanship. The shears shall be smoothly finished with no rough edges, excess flash or welds, and free from any defects which may affect appearance, function, or serviceability.

2.9 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated in parentheses are for information purposes only.

2.10 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

2.11 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

3. REGULATORY REQUIREMENTS.

3.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Sampling. The levels of inspection and acceptable quality levels (AQL) shall be in accordance with MIL-STD-105.

4.3 Lot formation. All shears from the same manufacturer offered for delivery at one time shall be considered a lot for purposes of inspection.

4.4 Sampling for visual and dimensional examination. A random sample of shears shall be selected from each lot in accordance with inspection level S-2, AQL 6.5, expressed in terms of percent defective. The sample unit shall be one pair of shears. The sample shears shall be visually and dimensionally examined to verify compliance with this commercial item description.

4.5 Sampling for tests. A random sample of shears shall be selected from each lot in accordance with inspection level S-3, AQL 1.0, expressed in terms of percent defective. The sample unit shall be one pair of shears.

4.6. Testing.

4.6.1 Blade hardness. Prior to plating, the shears shall be tested for Rockwell hardness in accordance with ASTM E 18 (see 2.4). A lot shall consist of all blades, expressed in pairs, manufactured under the same process and control.

4.6.2 Plating. The plating thickness shall be tested in accordance with ASTM B 530 for conformance to 2.5.

5. PACKAGING

5.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Source of Documents.

6.1.1 Copies of military standards may be obtained from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

6.1.2 ASTM standards are available from ASTM, 1916 Race Street, Philadelphia, PA 19103.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. The preservation, packing, and marking desired.

6.3 National Stock Number (NSN): The following NSN references this CID. This NSN may not be indicative of all possible NSNs associated with this CID.

NSN 3590-00-161-6913

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.