[INCH-POUND]
A-A-3086
October 23, 1996

COMMERCIAL ITEM DESCRIPTION

WRENCH, BUNG, AND WRENCH, DRAIN PLUG

The General Services Administration has authorized the use of this Commercial Item Description for procurement of GGG-W-00647 for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers wrenches for use on drum bungs, and various sizes of female drive drain plugs.

2. CLASSIFICATION.

2.1 Classification. The wrenches covered by this commercial item description shall be of the following types:

Type I. - Bung.
Type II - Drain Plug

3. SALIENT CHARACTERISTICS.

3.1 Design.

3.1.1 Type I wrench. The type I wrench shall be capable of loosening and tightening bungs on metal drums. It shall be of the single-end, or double-end, multiple-wrenching, engager type. The wrench shall be capable of engaging at least 20 different common commercial bungs used on storage drums as depicted in Figure 1. The minimum length of the wrench shall be 15 inches and shall be similar to Figure 1. The type I wrench head(s) shall be constructed of steel or malleable iron and shall have a hardness of 35 to 55 HRC when tested as specified in ASTM E 18. The type I handles shall be of steel and securely attached or integrally forged to the wrench head(s) so as to provide a balanced tool. Wrench handles shall clear the rim of the barrel head with a minimum clearance of one inch when engaged in loosening or tightening bungs. The type I wrenches shall withstand a minimum test load of not less than 6100 inch-pounds for the minimum bung size and a maximum test load of 11,000 inch-pounds for the maximum bung size without injury or permanent deformation (set) which may affect their durability or serviceability. The wrenches shall be painted or otherwise treated to resist corrosion.

3.1.2 Type II wrench. The type II wrench shall be of the double-end type with multiple-wrenching engagers for loosening and tightening various sizes of female drive drain plugs. Each wrench shall include among its various drain plug sizes, square engagers sized 5/16, 3/8, 7/16, 1/2, 9/16, and 5/8 inch. Tolerances for engager sizes shall be ± 1/32 inch. In addition, the wrench shall have a screwdriver-type blade with a thickness of 1/8 inch at the tip and 3/4 inch in width at the tip. The wrench shall be approximately 8-3/4 inches overall in length, and shall be similar to Figure 2. The type II wrench shall be of forged steel and have a hardness of 40 to 45 HRC when tested as specified in ASTM E 18. The wrenches shall be painted or otherwise treated to resist corrosion.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

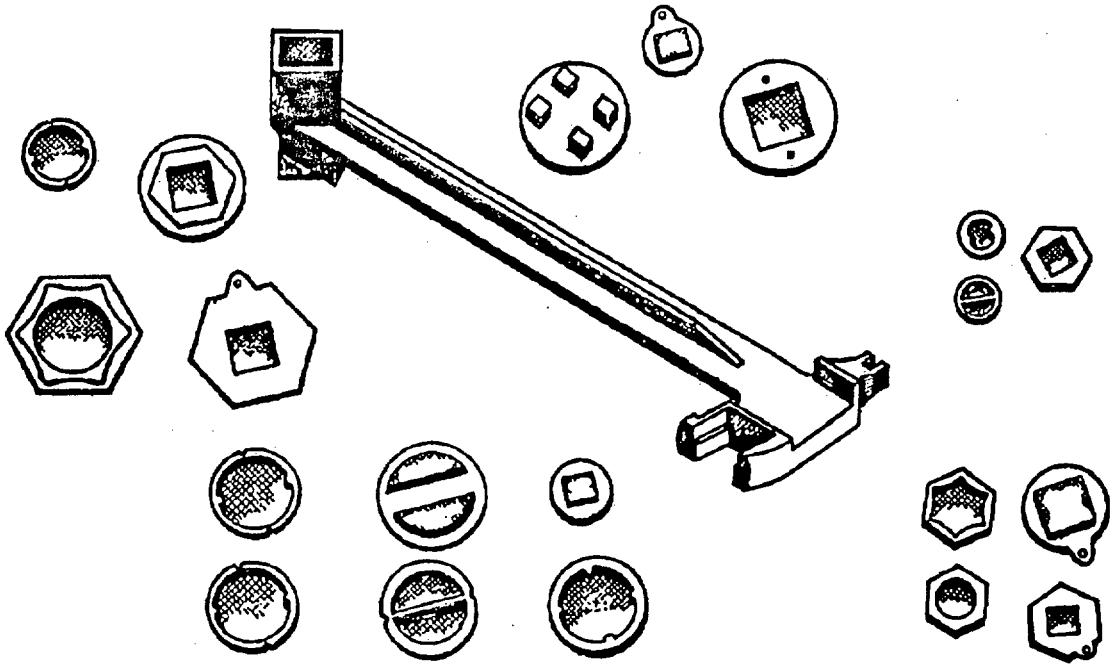


Figure 1. Type I, bung wrench (showing 20 common types of bungs which fits this wrench).

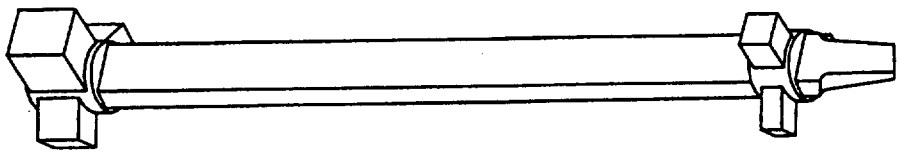


Figure 2. Type II, drain plug wrench.

3.2 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

ASTM E18: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(f) What preservation, packing, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the wrench specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN

5120-00-507-4886

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.