MIL-STD-1754
29 December 1978

MILITARY STANDARD

FASTENING DEVICES PREFERRED FOR DESIGN, LISTING OF

FSC 5325

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, DC 20301

Fastening Devices Preferred For Design, Listing of

MIL-STD-1754

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Aeronautical Systems Division (AFSC), ATTN: ASD/ENESS, Wright-Patterson Air Force Base, Ohio 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of this bookform standard is to provide a commodity type parts document on fastening devices to aid military equipment designers and engineers in the selection of preferred fastening devices.

2. This document consists of an index of preferred standardization documents and a listing of preferred parts within these documents that have been selected with respect to configuration, sizes, lengths, materials, and finishes for fastening devices.

3. The selection of preferred documents listed in this standard and the selection of part numbers within the preferred documents were made as follows:

a. Selection of Documents

(1) Documents listed or scheduled for listing in the Department of Defense Index of Specifications and Standards (DODISS).

(2) Documents which are active for design.

(3) Documents specifying part numbers (dash numbers) which designate specific sizes, materials and finishes.

b. Selection of Part Numbers

(1) By conducting a thorough search and evaluation of existing DoD procurement information.

(2) By evaluation of preferred parts listed in recent weapon system contracts.

(3) By evaluation of preferred parts lists obtained from industry.

4. To increase the scope and versatility of this fastening devices standard, periodic revisions will be developed. Results from Standardization studies, MILITARY PARTS CONTROL ADVISORY GROUP (MPCAG) evaluations, evaluation of a new family of fastening devices and recommendations from interested activities will form the basis for these revisions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

CONTENTS

		Page
Paragraph 1.	SCOPE	1
2.	REFERENCED DOCUMENTS	2-4
3.	DEFINITIONS	4-6
4.	GENERAL STATEMENTS	6
5.	DETAILED REQUIREMENTS	6
6.	NOTES	6

SECTIONS

Section 100	EYELET, METALLIC	
101	Eyelet, Metallic, Electrical, Printed Circuit Board, Funnel Type	101.1
102	Eyelet, Metallic, Electrical, Rolled Flange Type	102.1
103	Eyelet, Metallic, Flat Range Type	103.1
104	Eyelet-Lacing	104.1
105	Eyelet, Metallic, Rolled Flange Type; and Eyelet Washer	105.1
106	Eyelet, Metallic, Telescopic Flange Type	106.1
200	FASTENER, SLIDE, INTERLOCKING	
201	Fasteners-Interlocking Slide	201.1
300	FASTENER, SNAP	
301	Fasteners, Snap Style 1, Large Curtain Type	301.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTIONS - Continued

		Page
Section 302	Fasteners, Snap Style 1A, Small Curtain Type	302.1
303	Fasteners, Snap Style 1B, Mud-Proof Curtain Type	303.1
304	Fasteners, Snap, Style 2, Regular Wire Spring Clamp Type	304.1
305	Fasteners, Snap, Style 2A, Small Wire Spring Clamp Type	305.1
306	Fasteners, Snap, Style 3, Pronged Ring-Head Type	306.1
307	Fasteners, Snap, Style 4, Three Way Locking Type	307.1
308	Fasteners, Snap, Style 7, Rivet Type	308.1
400	FASTENER, SNAPSLIDE	
401	Fastener-Snapslide	401.1
500	STUD, SNAPSLIDE, FASTENER	
501	Stud, Style I, Snapslide Fastener	501.1
502	Stud, Style III, Snapslide Fastener	502.1
503	Stud, Style IV, Snapslide Fastener	503.1
600	FASTENER ASSEMBLY, TURNLOCK	
601	Fastener, Rotary, Quick-Operating, Flush Head Floating Type, 2210 LBS Minimum Tensile Strength	601.1
602	Fastener, Rotary, Quick-Operating, Protruding Head, Floating Type, 2210 LBS Minimum Tensile Strength	602.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTIONS - Continued

Page

Section 700 GROMMET, METALLIC

701 Grommets, Metallic, Plain and Spur, with Washer Type I and Type III---------- 701.1

800 GROMMET, PLASTIC

801 Grommet-Drainage, Plastic---------- 801.1

802 Grommet, Plastic, Edging---------- 802.1

803 Grommet-Plastic Flip Type---------- 803.1

804 Grommet, Plastic-Split---------- 804.1

900 GROMMET, RUBBER

901 Grommets, Synthetic and Silicone Rubber, Hot Oil and Coolant Resistant---------- 901.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This standard provides a listing of preferred fastening devices encompassing the following characteristics:

a. Configuration

b. Size

c. Materials

d. Protective Coatings and Finishes

1.2 Purpose. The purpose of this standard is as follows:

a. Provide the designer with a listing of preferred fastening devices to promote their use in design of weapon systems and equipments.

b. Control and minimize the variety of fastening devices used in military equipment thereby facilitating logistic support of the equipment during its life cycle.

1.3 Application. To minimize the proliferation of fastening devices, only the preferred part number listed herein are authorized for use in new design. All other part numbers, even though shown on current Military Specification Sheets, Military Standards (MS), National Aerospace Standards (NAS), Aeronautical Standards (AS), and Air Force/Navy Aeronautical Standards (AN), are not approved for use in new design unless approved by the cognizant Government procuring activity.

1.4 Intended use. Implement this standard by including one of the following options in the contract:

a. Require this standard as a supplement to an end use type standard such as MIL-STD-1471 or MIL-STD-1515. When thus required, only the fastening devices listed in both the end use type and this standard are acceptable. Use of other fastening devices requires approval of the Government procuring activity.

b. Require this standard as a guide to be used with an end use type standard such as MIL-STD-1471 or MIL-STD-1515. When thus required, the fastening devices listed in the end use type standard and this standard are acceptable. The designer must assure himself the fastening devices listed in both the end use type standard and this standard are not adequate for his requirement before using fastening devices not listed herein. Use of fastening devices not listed in the end use type standard requires approval of the Government procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

c. Require this standard and indicate exceptions to it. When thus required, only the fastening devices listed in this standard and not excluded by the exceptions are acceptable. Use of other fastening devices requires approval of the Government procuring activity.

d. Require this standard as a guide. When thus required, the designer must assure himself the fastening devices listed in this standard are not adequate for the requirement before using other fastening devices.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-E-20652/1	- Eyelets, Metallic, Rolled Flange Type; And Eyelet Washer.
MIL-E-20652/2	- Eyelets, Metallic, Flat Flange Type.
MIL-E-20652/3	- Eyelets, Metallic, Telescopic Type.

STANDARDS

MILITARY

MS17731	- Fastener, Rotary, Quick-Operating, Flush Head, Floating Type, 2210 LBS Min Tensile Strength.
MS17732	- Fastener, Rotary, Quick-Operating, Protruding Head, Floating Type, 2210 LBS Min Tensile Strength.
MS20230	- Grommet, Metallic, Plain and Spur, With Washer, Type I and Type III.
MS21266	- Grommet, Plastic, Edging.
MS21323	- Stud-Style I Snapslide Fastener.
MS21325	- Stud-Style III Snapslide Fastener.
MS21326	- Stud, Style IV Snapslide Fastener.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY - Continued

MS21327	- Fastener Installation-Snapslide.
MS21332	- Fastener-Snapslide.
MS27977	- Fasteners, Snap, Style 1 (Large Curtain Type).
MS27978	- Fasteners, Snap, Style 1A (Small Curtain Type).
MS27979	- Fasteners, Snap, Style 1B (Mud-Proof Curtain Type).
MS27980	- Fasteners, Snap, Style 2 (Regular Wire Spring Clamp Type).
MS27981	- Fasteners, Snap, Style 2A (Small Wire Spring Clamp Type).
MS27982	- Fasteners, Snap, Style 3 (Pronged Ring Head Type).
MS27983	- Fasteners, Snap, Style 4 (Three Way Locking Type).
MS27986	- Fasteners, Snap, Style 7 (Rivet Type).
MS35489	- Grommets, Synthetic and Silicone Rubber, Hot Oil and Coolant Resistant.

AIR FORCE-NAVY AERONAUTICAL

AN229	- Fasteners-Interlocking Slide.
AN231	- Grommet-Drainage, Plastics.
AN240	- Eyelet-Lacing.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. (AIA)

NATIONAL AEROSPACE STANDARDS

NAS557	- Grommet, Plastic-Split.
NAS1368	- Grommet-Plastic Flip Type.
NAS1453	- Eyelet, Metallic, Electrical, Printed Circuit Board, Funnel Type.
NAS1788	- Eyelet, Metallic, Electrical, Rolled Flange Type.

(Application for copies should be addressed to the Aerospace Industries Association of America, Inc., 1725 De Sales Street, N.W., Washington, DC 20036.)

3. DEFINITIONS

3.1 Adopted Industry Standards. Any Industry Specification or Standard which is listed in the Department of Defense Index of Specifications and Standards (DODISS).

3.2 Commodity Type Document. A document which lists preferred parts within a Federal Supply Classification class or Item Name. This document is to be used for selecting preferred parts for a new design when the document is invoked as a contractual requirement in conjunction with a parts control requirement.

3.3 End Use Type Document. A document that lists preferred documents and establishes parts requirements which are contractually binding for the design and construction/manufacture of a weapon system or an established equipment category such as MIL-STD-1515.

3.4 Military Parts Control Advisory Group (MPCAG). A Department of Defense organization which provides advice to the Military Departments and military contractors on the selection of parts in assigned commodity classes, and collects data on nonstandard parts for developing or updating military specifications and standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

3.5 Definitions of approved item names used in this standard are as follows:

a. Eyelet, Metallic. A one-piece metal item; usually tubular, flanged at one end, the other end open. It is used primarily for lining and reinforcing the edges of holes. The unflanged end is designed to be inserted through a hole and crimped to form a mating flange.

b. Fastener, Slide, Interlocking. Limited to items commonly known as "zipper".

c. Fastener, Snap. A nonpositive fastening device consisting of a STUD, SNAP FASTENER and a SOCKET, SNAP FASTENER. It may have any one or several of the following components: POST, SNAP FASTENER; CLINCH PLATE, SNAP FASTENER; and CAP, SNAP FASTENER. It is used as a means of attaching covers, curtains, or similar items to each other or to vehicles, hatch coaming, bulkheads, and the like.

d. Fastener, Snapslide. A mechanical device consisting of a latch, latch guide, post, and washer designed to support and hold equipment in a fixed position.

e. Stud, Snapslide, Fastener. An item which is used in conjunction with FASTENER, SNAPSLIDE. It secures the latch when mated with the notched rest of the latch.

f. Fastener Assembly, Turnlock. An item consisting of a STUD, TURNLOCK FASTENER or a STUD ASSEMBLY, TURNLOCK FASTENER, and a RECEPTACLE, TURNLOCK FASTENER. It is designed to provide a means for securely locking two items together and allow for quick locking or unlocking action.

g. Grommet, Metallic. A two-piece metallic item, one piece usually tubular in appearance and flanged at one end, the other piece a plain tooth or spur washer or retaining ring. It is primarily used for lining and reinforcing the edges of holes. The unflanged end is designed to be inserted through a hole and retained in place by being crimped over the plain or tooth washer or retaining ring or by clinching action between the spur washer and the flanged end.

h. Grommet, Plastic. An item of any peripheral shape having flanges or a groove(s) on its outer perimeter to provide a self-retaining characteristics when inserted in a hole, clamp, or the like. Designed for the purpose of protecting and/or insulating wires, cables and other items passing through it.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

i. Grommet, Rubber. An item of any peripheral shape having flanges or a groove(s) on its outer perimeter to provide a self-retaining characteristics when inserted in a hole, clamp, or the like. Designed for the purpose of protecting and/or insulating wires, cables and other items passing through it.

4. GENERAL STATEMENTS

4.1 Selection procedure.

4.1.1 Document selection. The applicable section shall be selected after reviewing the table of contents.

4.1.2 Part number selection (preliminary). A preliminary selection of the applicable part number shall be made after reviewing the nominal parameters (sizes, materials, tensile strength) listed in the sections.

4.1.3 Part number selection (final). A final selection of the applicable part number shall be made after reviewing the detailed requirements specified in the referenced fastening device documents for suitability in the particular military equipment being designed (considering the application and environmental conditions).

5. DETAILED REQUIREMENTS

5.1 The detailed requirements for preferred fastening devices are contained in the applicable fastening device document and associated procurement specification. If there is disagreement between the nominal parameters listed in this standard and the parameters specified in the applicable fastening device document or associated procurement specification, the parameters specified in the applicable fastening device document or associated procurement specification shall prevail.

6. NOTES

6.1 Dimensions. Dimensions shown in the sections contained herein are in inches.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:52Z
Check the source to verify that this is the current version before use.

Custodians:
Army - GL
Navy -
Air Force - 11

Review activities:
Army - AT, AV, EA, ER, MI
Navy - OS, SH
Air Force -
DLA - DM, IS
NS

User activities:
Army - ME
Navy - MC
Air Force - 99

Preparing activity:
Air Force - 11

Agent:
DLA - IS

(Project 5325-0176)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 101

EYELET, METALLIC, ELECTRICAL, PRINTED CIRCUIT BOARD, FUNNEL TYPE

APPLICABLE DOCUMENT: NAS1453

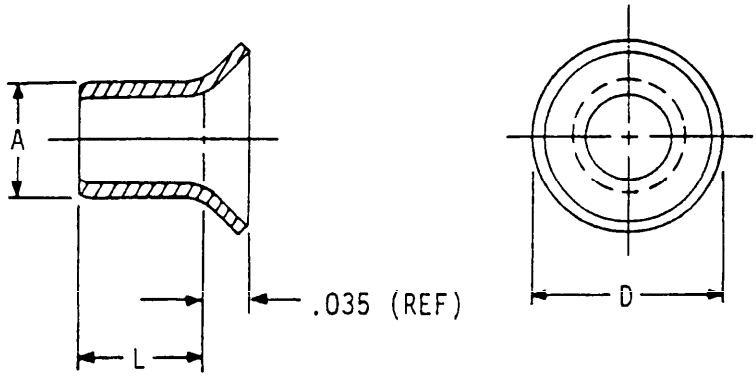

MATERIAL	PROTECTIVE FINISH
COPPER	SOLDER ELECTROPLATE

TABLE I. EYELET CONFIGURATION DASH NUMBERS.

A	D	L	APPLICABLE PRINTED CIRCUIT BOARD THICKNESS (REF)	MAXIMUM AWG LEAD WIRE SIZE	NAS1453 DASH NO.
.047	.080	.095	.062	NO. 22	-3-095S
.060	.100	.095	.062	NO. 20	-4-095S


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 102

EYELET, METALLIC, ELECTRICAL, ROLLED FLANGE TYPE

APPLICABLE DOCUMENT: NAS1788

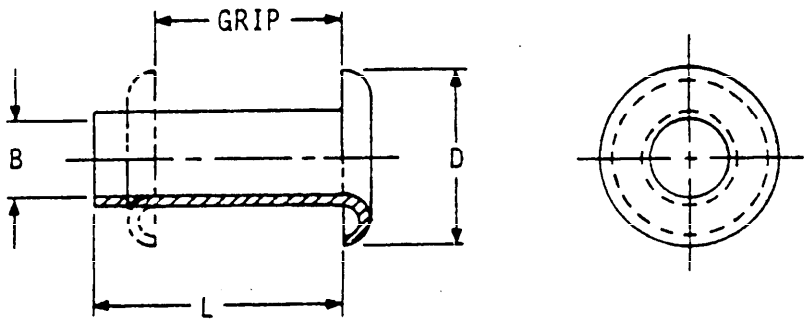

MATERIAL	PROTECTIVE FINISH
BRASS	ELECTROPLATED TIN-LEAD OR TIN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. EYELET CONFIGURATION DASH NUMBERS.

D	L	B	GRIP (MAX)	NAS1738 DASH NO.
.080	.062	.036	.020	-1-2T
	.093		.051	-1-3T
	.125		.082	-1-4T
.105	.062	.043	.020	-2-2T
	.093		.051	-2-3T
	.125		.082	-2-4T
	.156		.113	-2-5T
	.187		.144	-2-6T
	.219		.176	-2-7T
.150	.093	.069	.045	-3-3T
	.125		.077	-3-4T
	.156		.108	-3-5T
	.187		.139	-3-6T
	.219		.171	-3-7T
	.250		.202	-3-8T
	.281		.233	-3-9T
	.312		.264	-3-10T
.200	.093	.097	.045	-4-3T
	.125		.077	-4-4T
	.156		.108	-4-5T
	.187		.139	-4-6T
	.219		.171	-4-7T
	.250		.202	-4-8T
	.281		.233	-4-9T
	.312		.264	-4-10T
	.344		.296	-4-11T
.245	.093	.127	.040	-5-3T
	.125		.072	-5-4T
	.156		.103	-5-5T
	.187		.134	-5-6T
	.219		.166	-5-7T
	.250		.197	-5-8T
	.281		.228	-5-9T
	.312		.259	-5-10T

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. EYELET CONFIGURATION DASH NUMBERS. - CONTINUED

D	L	B	GRIP (MAX)	NAS1788 DASH NO.
.290	.093	.157	.040	-6-3T
	.125		.072	-6-4T
	.156		.103	-6-5T
	.187		.134	-6-6T
	.219		.166	-6-7T
	.250		.197	-6-8T
	.281		.228	-6-9T
	.312		.259	-6-10T
	.344		.291	-6-11T
	.375		.322	-6-12T
	.406		.353	-6-13T
	.437		.384	-6-14T
.340	.093	.188	.035	-7-3T
	.125		.067	-7-4T
	.156		.098	-7-5T
	.187		.129	-7-6T
	.219		.161	-7-7T
	.250		.192	-7-8T
	.281		.223	-7-9T
	.312		.254	-7-10T
	.344		.286	-7-11T
	.375		.317	-7-12T
.385	.093	.218	.035	-8-3T
	.125		.067	-8-4T
	.156		.098	-8-5T
	.187		.129	-8-6T
	.219		.161	-8-7T
	.250		.192	-8-8T
	.281		.223	-8-9T
	.312		.254	-8-10T
	.344		.286	-8-11T
	.375		.317	-8-12T
	.406		.348	-8-13T


Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 103

EYELET, METALLIC, FLAT FLANGE TYPE

APPLICABLE DOCUMENT: MIL-E-20652/2

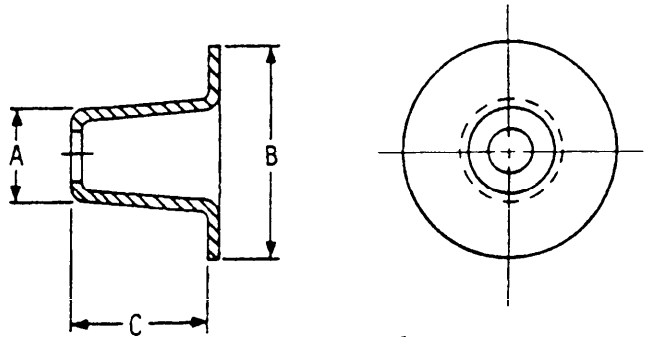

MATERIAL	PROTECTIVE FINISH
ALUMINUM	ANODIZED

TABLE I. EYELET CONFIGURATION DASH NUMBERS.

A	B	C	M20652/2 DASH NO.
.131-.157	.236	.125	-AAE201
.144-.175	.256	.132	-AAE202
.156-.184	.298	.130	-AAE203
.208-.234	.439	.224	-AAE204


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 104

EYELET - LACING

APPLICABLE DOCUMENT: AN240

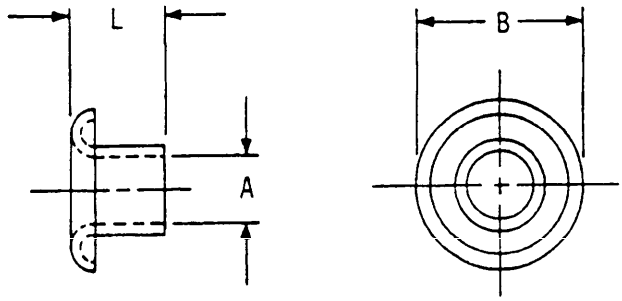

MATERIAL	PROTECTIVE FINISH
STEEL	CADMIUM PLATE OR BLACK ENAMEL
BRASS	BLACK ENAMEL

TABLE I. EYELET CONFIGURATION DASH NUMBER.

A	B	L	FOR USE WITH MATERIAL THICKNESS (MAX.)	AN240 DASH NO.	
				STEEL	BRASS
.125	.312	.170	.094	F2	-2
.188	.375	.190	.109	F3	-3
.250	.500	.210	.125	F4	-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 105

EYELET, METALLIC, ROLLED FLANGE TYPE; AND EYELET WASHER

APPLICABLE DOCUMENT: MIL-E-20652/1

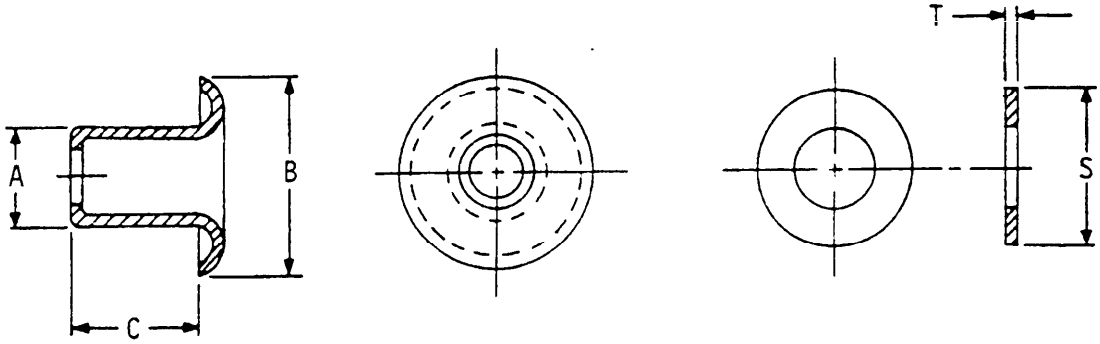

EYELET WASHER

MATERIAL	PROTECTIVE FINISH
ALUMINUM	BLACK ENAMEL
BRASS	BLACK CHEMICAL

TABLE I. EYELET CONFIGURATION DASH NUMBERS.

A	B	C	M20652/1 DASH NO.
.156	.254	.121	-ABE102
.158	.245	.182	-BBE103
.158	.245	.222	-BBE104
.170	.260	.147	-BBE105
.177	.300	.138	-ABE106
.200	.300	.187	-BBE110
.192-.208	.346	.145	-ABE111
.200	.343	.210	-ABE112
.200	.403	.143	-BBE114
.200	.403	.210	-BBE117
.200	.403	.250	-BBE118

A	B	C	M20652/1 DASH NO.
.204	.345	.185	-BBE119
.212	.550	.237	-BBE120
.212	.550	.297	-BBE121
.221	.388	.166	-ABE122
.210-.233	.460	.155	-BBE124
.273	.450	.185	-BBE125
.279	.494	.180	-ABE126
.295-.297	.490	.198	-ABE128
.298-.321	.505	.222	-ABE129
.350	.592	.188	-ABE131

NOTE: ABE INDICATES ALUMINUM ALLOY, BLACK ENAMEL FINISH EYELET.
BBE INDICATES BRASS, BLACK CHEMICAL FINISH EYELET.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T10:52Z
Check the source to verify that this is the current version before use.

TABLE II. WASHER CONFIGURATION DASH NUMBER.

S	T	M20652/1 DASH NO.	USE WITH EYELETS-NUMBER
.450	.020	-BBW101	BBE114, BBE117 BBE118
.503	.031	-BBW102	BBE120, BBE121


NOTE: BBW INDICATES BRASS, BLACK CHEMICAL FINISH WASHER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 106

EYELET, METALLIC, TELESCOPIC TYPE

APPLICABLE DOCUMENT: MIL-E-20652/3

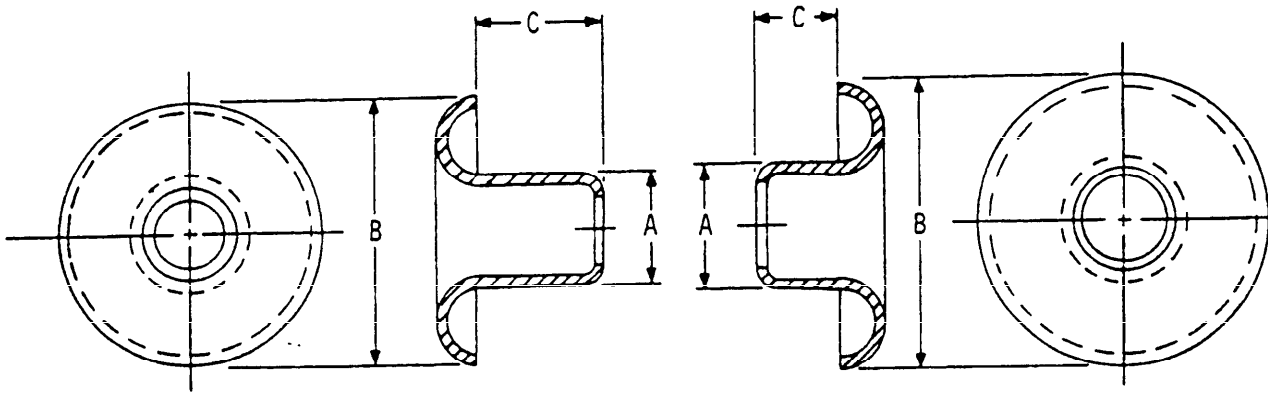

EYELET WASHER

MATERIAL	PROTECTIVE FINISH
ALUMINUM	BLACK ENAMEL
BRASS	BLACK CHEMICAL

Source: https://assist.dla.mil -- Downloaded: 2026-04-07 07:52Z
Check the source to verify that this is the current version before use.

TABLE I. EYELET AND WASHER CONFIGURATION DASH NUMBERS.

PART	A	B	C	M20652/3 DASH NO.	FOR USE WITH DASH NUMBER
EYELET	.190-.250	.350	.153	-BBT301	-BBT302
WASHER	.225-.235	.428	.118	-BBT302	-BBT301
EYELET	.200	.403	.210	-BBT307	-BBT308
WASHER	.243	.425	.125	-BBT308	-BBT307
EYELET	.212-.268	.455	.162	-ABT309	-ABT310
WASHER	.255	.450	.120	-ABT310	-ABT309
EYELET	.223	.388	.166	-ABT313	-ABT314
WASHER	.255	.440	.095	-ABT314	-ABT313
EYELET	.295-.310	.540	.150	-ABT317	-ABT318
WASHER	.335	.545	.100	-ABT318	-ABT317

NOTE: ABT INDICATES ALUMINUM ALLOY, BLACK ENAMEL TELESCOPIC EYELET OR WASHER.

BBT INDICATES BRASS, BLACK CHEMICAL FINISH TELESCOPIC EYELET OR WASHER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


SECTION 201

FASTENERS - INTERLOCKING SLIDE

APPLICABLE DOCUMENT: AN229


TYPE A

NON-SEPARATING,
SINGLE ACTION

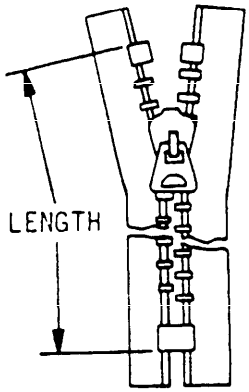

TYPE B

SEPARATING,
SINGLE ACTION

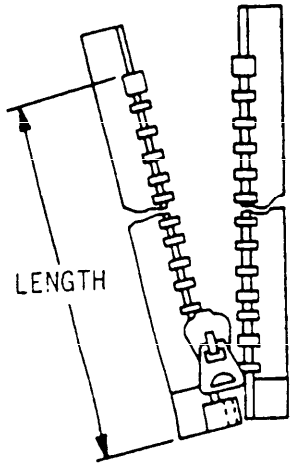

MATERIAL	PROTECTIVE FINISH (CHAIN)
BRASS	NATURAL

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. TYPE "A" CONFIGURATION DASH NUMBERS.

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
1 (LIGHT-MEDIUM SERVICE)	2	-1AL8-I	-1AS8-I
	3	12	12
	4	16	16
	5	20	20
	6	24	24
	7	28	28
	8	32	32
	9	36	36
	10	40	40
	11	44	44
	12	48	48
	13	52	52
	14	56	56
	15	60	60
	16	64	64
	17	68	68
	18	72	72
	19	76	76
	20	80	80
	22	88	88
	24	96	96
	26	104	104
	28	112	112
	30	120	120
	32	128	128
	34	136	136
	36	144	144
2 (MEDIUM SERVICE)	4	-2AL16-I	-2AS16-I
	5	20	20
	6	24	24
	7	28	28
	8	32	32
	9	36	36
	10	40	40
	11	44	44
	12	48	48
	13	52	52
	14	56	56

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
2 (MEDIUM SERVICE)	15	-2AL60-I	-2AS60-I
	16	64	64
	17	68	68
	18	72	72
	19	76	76
	20	80	80
	21	84	84
	22	88	88
	23	92	92
	24	96	96
	25	100	100
	26	104	104
	27	108	108
	28	112	112
	29	116	116
	30	120	120
	31	124	124
	32	128	128
	33	132	132
	34	136	136
	35	140	140
	36	144	144
	37	148	148
	38	152	152
	39	156	156
	40	160	160
	41	164	164
	42	168	168
	43	172	172
	44	176	176
	45	180	180
	46	184	184
	47	188	188
	48	192	192
	49	196	196
	50	200	200
	51	204	204
	52	208	208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. TYPE "A" CONFIGURATION DASH NUMBERS. - CONTINUED

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
2 (MEDIUM SERVICE)	53	-2AL212-I	-2AS212-I
	54	216	216
	55	220	220
	56	224	224
	57	228	228
	58	232	232
	59	236	236
	60	240	240
	61	244	244
	62	248	248
	63	252	252
	64	256	256
	65	260	260
	66	264	264
	67	268	268
	68	272	272
	69	276	276
	70	280	280
	71	284	284
	72	288	288
	73	292	292
	74	296	296
	75	300	300
	76	304	304
	77	308	308
	78	312	312
	79	316	316
	80	320	320
4 (HEAVY SERVICE)	4	-4AL16-I	-4AS16-I
	5	20	20
	6	24	24
	7	28	28
	8	32	32
	9	36	36
	10	40	40
	11	44	44
	12	48	48
	13	52	52

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
4 (HEAVY SERVICE)	14	-4AL56-I	-4AS56-I
	15	60	60
	16	64	64
	17	68	68
	18	72	72
	19	76	76
	20	80	80
	21	84	84
	22	88	88
	23	92	92
	24	96	96
	25	100	100
	26	104	104
	27	108	108
	28	112	112
	29	116	116
	30	120	120
	31	124	124
	32	128	128
	33	132	132
	34	136	136
	35	140	140
	36	144	144
	37	148	148
	38	152	152
	39	156	156
	40	160	160
	41	164	164
	42	168	168
	43	172	172
	44	176	176
	45	180	180
	46	184	184
	47	188	188
	48	192	192
	49	196	196
	50	200	200
	51	204	204
	52	208	208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. TYPE "A" CONFIGURATION DASH NUMBERS. - CONTINUED

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
4 (HEAVY SERVICE)	53	-4AL212-I	-4AS212-I
	54	216	216
	55	220	220
	56	224	224
	57	-4AL228-I	-4AS228-I
	58	232	232
	59	236	236
	60	240	240

TABLE II. TYPE "B" CONFIGURATION DASH NUMBERS.

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
2 (MEDIUM SERVICE)	5	-2BL20-I	-2BS20-I
	6	24	24
	7	28	28
	8	32	32
	9	36	36
	10	40	40
	11	44	44
	12	48	48
	13	52	52
	14	56	56
	15	60	60
	16	64	64
	17	68	68
	18	72	72
	19	76	76
	20	80	80
	21	84	84
	22	88	88
	23	92	92
	24	96	96
	25	100	100
	26	104	104
	27	108	108
	28	112	112
	29	116	116
	30	120	120
4 (HEAVY SERVICE)	6	-4BL24-I	-4BS24-I
	7	28	28
	8	-4BL32-I	-4BS32-I
	9	36	36
	10	40	40
	11	44	44
	12	48	48
	13	52	52
	14	56	56
	15	60	60
	16	64	64
	17	68	68
	18	72	72
	19	76	76
	20	80	80
	21	84	84
	22	88	88
	23	92	92
	24	96	96
	25	100	100
	26	104	104
	27	108	108
	28	112	112
	29	116	116
	30	120	120
	31	124	124
	32	128	128
	33	132	132
	34	136	136
	35	140	140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE II. TYPE "B" CONFIGURATION DASH NUMBERS. - CONTINUED

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
4 (HEAVY SERVICE)	36	-4BL144-I	-4BS144-I
	37	148	148
	38	152	152
	39	156	156
	40	160	160
	41	164	164
	42	168	168
	43	172	172
	44	176	176
	45	180	180
	46	184	184
	47	188	188
	48	192	192
	49	196	196
	50	200	200
	51	204	204
	52	208	208
	53	212	212
	54	216	216
	55	220	220
	56	224	224
	57	228	228
	58	232	232

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
4 (HEAVY SERVICE)	59	-4BL236-I	-4BS236-I
	60	240	240
	61	244	244
	62	248	248
	63	252	252
	64	256	256
	65	260	260
	66	264	264
	67	268	268
	68	272	272
	69	276	276
	70	280	280
	71	284	284
	72	288	288
	73	292	292
	74	296	296
	75	300	300
	76	304	304
	77	308	308
	78	312	312
	79	316	316
	80	320	320


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 301

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

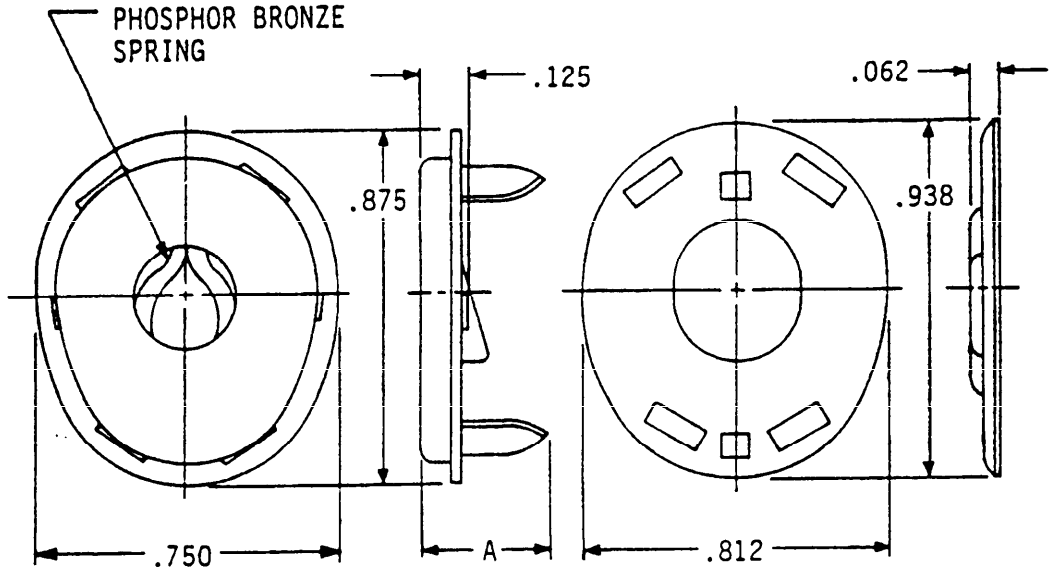

SOCKET

CLINCH PLATE

(OPERATES ON SINGLE POINT LIFT PRINCIPLE)

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. CLINCH PLATE AND SOCKET CONFIGURATION DASH NUMBER.

PART	A	MS27977 DASH NO.	
		BLACK	NICKEL PLATE
SOCKET, REG. PRONG	.328	-1B	-1N
SOCKET, LONG PRONG	.375	-2B	-2N
CLINCH PLATE	— —	-3B	-3N


1. SOCKET AND CLINCH PLATE CONSTITUTE THE FEMALE HALF OF THE STYLE 1 FASTENERS. THE FOLLOWING PARTS IN THIS SECTION CONSTITUTE THE MALE HALF.

2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

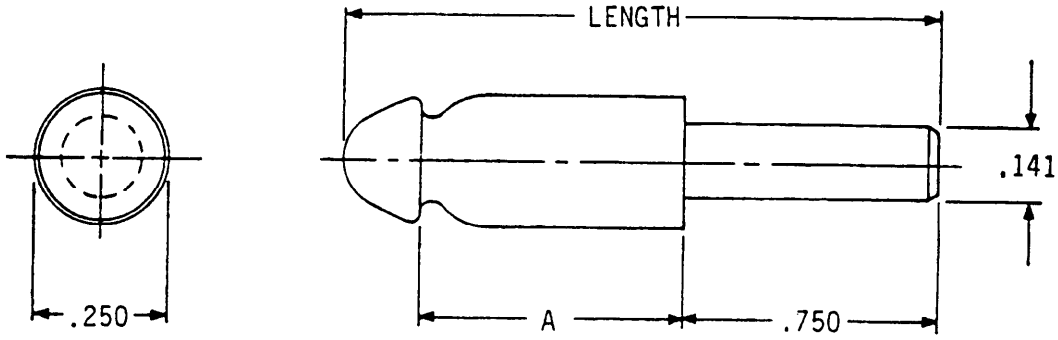

STUD, SOLID RIVET BASE

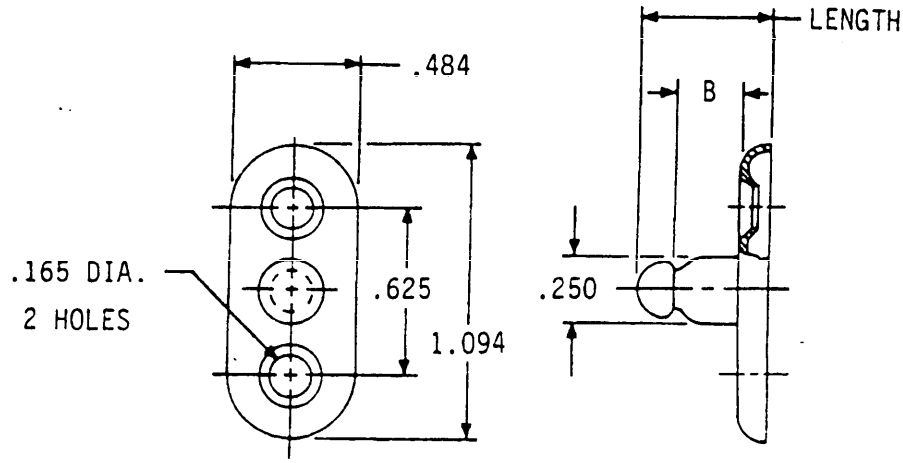

STUD, TWO SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE II. STUD CONFIGURATION DASH NUMBERS.


PART	A	B	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
STUD, SOLID	.281	— —	1.172	-4B	-4N
RIVET BASE	.500	— —	1.391	-5B	-5N
STUD, TWO SCREW BASE	— —	.250	.500	-6B	-6N
	— —	.500	.750	-7B	-7N

NOTE: STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF THE STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)


Source: https://assist.dla.mil — Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

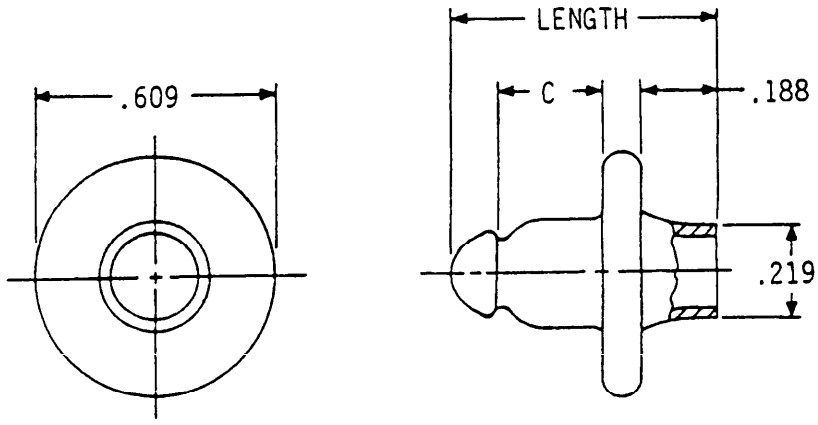

STUD, EYELET BASE

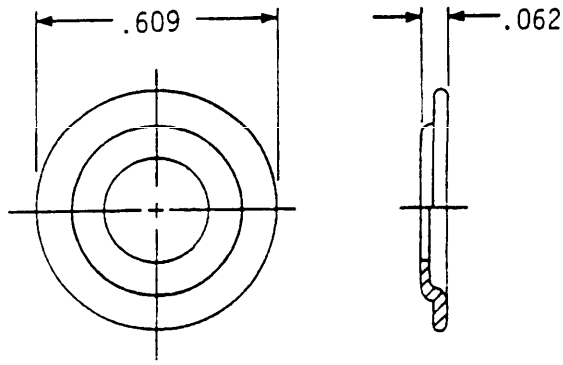

WASHER

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE III. STUD AND WASHER CONFIGURATION DASH NUMBERS.


PART	C	LENGTH	MS27977 DASH NO.	
			BLACK	NICKEL PLATE
STUD, EYELET BASE	.265	.688	-8B	-8N
	.500	.922	-9B	-9N
WASHER	--	--	-10B	-10N

NOTE: STUD AND WASHER, AS APPLICABLE, CONSTITUTE THE MALE HALF OF THE STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

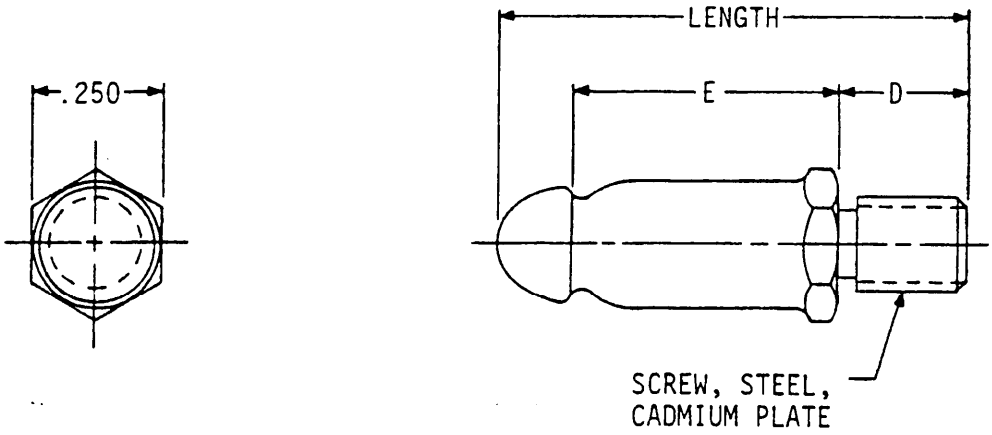

STUD, MACHINE SCREW BASE, SMALL HEX

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE IV. STUD CONFIGURATION DASH NUMBERS.

THREAD SIZE	E	D	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
NO. 8-32UNC-2A	.250	.188	.578	-11B	-11N
		.250	.641	-12B	-12N
		.375	.766	-13B	-13N
		.625	1.016	-14B	-14N
	.500	.188	.828	-15B	-15N
		.250	.891	-16B	-16N
		.375	1.016	-17B	-17N
		.625	1.266	-18B	-18N
NO. 10-32UNF-2A	.250	.188	.578	-19B	-19N
		.250	.641	-20B	-20N
		.375	.766	-21B	-21N
		.625	1.016	-22B	-22N
	.500	.188	.828	-23B	-23N
		.250	.891	-24B	-24N
		.375	1.016	-25B	-25N
		.625	1.266	-26B	-26N


NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)

2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

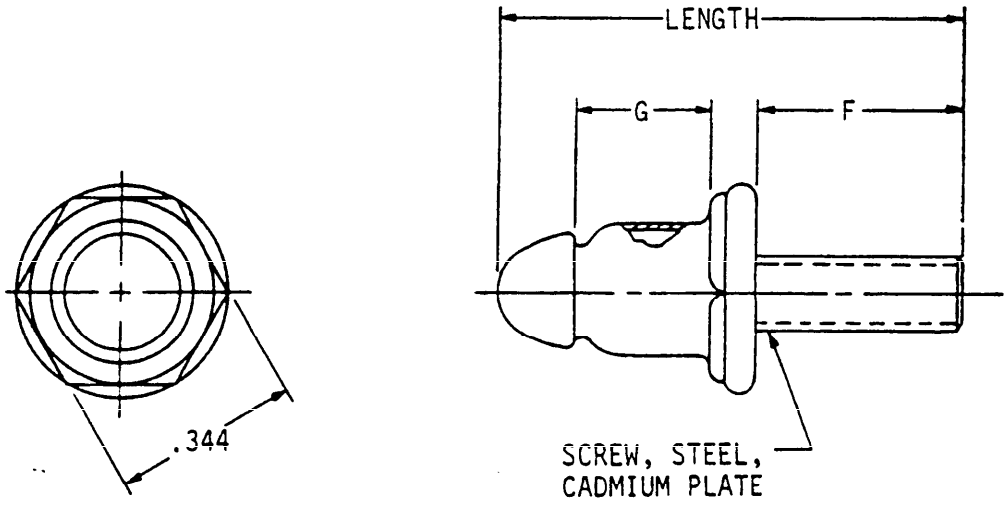

STUD, MACHINE SCREW BASE, LARGE HEX

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE V. STUD CONFIGURATION DASH NUMBERS.

THREAD SIZE	G	F	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
NO. 8-32UNC-2A	.250	.188	.688	-27B	-27N
		.250	.750	-28B	-28N
		.375	.875	-29B	-29N
		.625	1.125	-30B	-30N
	.500	.188	.938	-31B	-31N
		.250	1.000	-32B	-32N
		.375	1.125	-33B	-33N
		.625	1.375	-34B	-34N


THREAD SIZE	G	F	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
NO. 10-32UNF-2A	.250	.188	.688	-35B	-35N
		.250	.750	-36B	-36N
		.375	.875	-37B	-37N
		.625	1.125	-38B	-38N
	.500	.188	.938	-39B	-39N
		.250	1.000	-40B	-40N
		.375	1.125	-41B	-41N
		.625	1.375	-42B	-42N

NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)

2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE
APPLICABLE DOCUMENT: MS27977

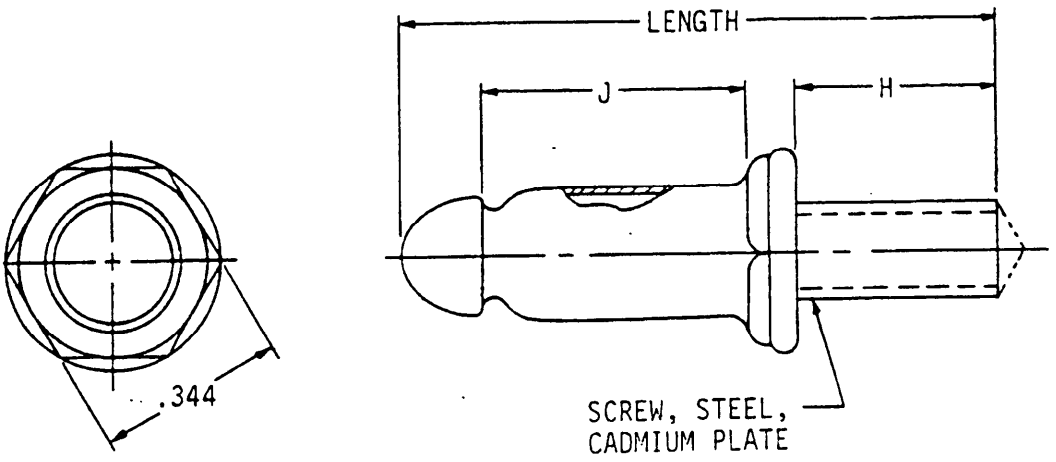

STUD, SELF-TAPPING SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2024-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE VI. STUD CONFIGURATION DASH NUMBERS.

SCREW SIZE & TYPE POINT	J	H	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
NO. 8 GIMLET POINT	.250	.375	.875	-43B	-43N
	.500	.375	1.125	-44B	-44N
NO. 10 BLUNT POINT	.250	.375	.875	-47B	-47N
		.500	1.000	-48B	-48N
		.625	1.125	-49B	-49N
	.500	.375	1.125	-50B	-50N
		.500	1.250	-51B	-51N
		.625	1.375	-52B	-52N


NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)

2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

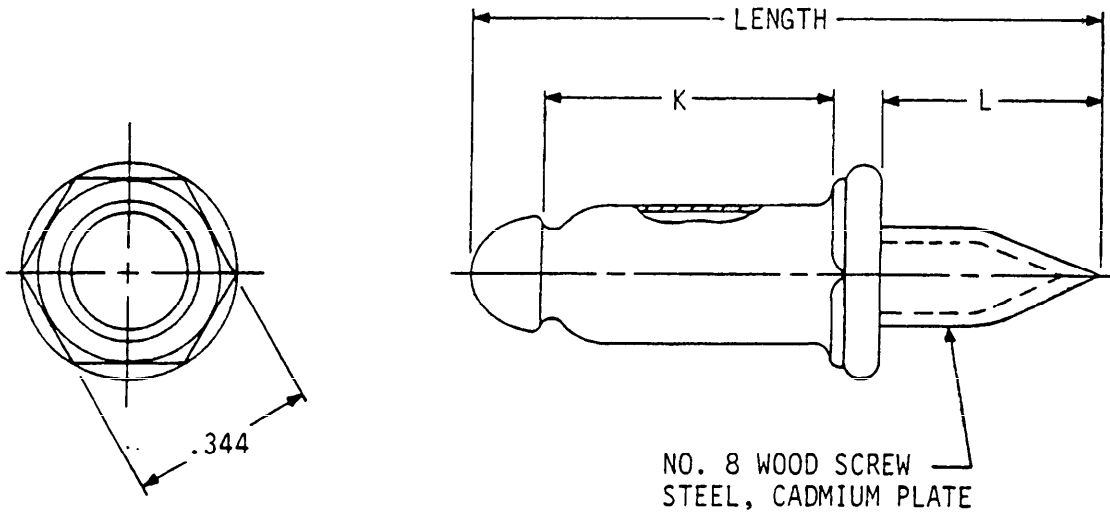

STUD, WOOD SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE VII. STUD CONFIGURATION DASH NUMBERS.

L	K	LENGTH	MS27977 DASH NO.	
			BLACK	NICKEL PLATE
.375	.266	.891	-59B	-59N
	.500	1.125	-60B	-60N
.750	.266	1.266	-61B	-61N
	.500	1.500	-62B	-62N


NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES MALE HALF OF STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)

2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

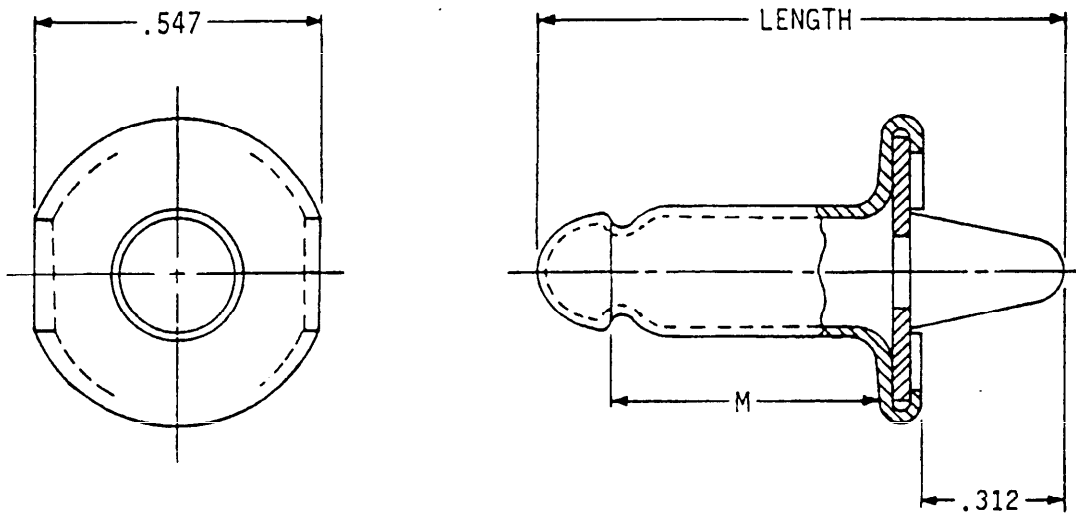

STUD, TWO PRONG, CLINCH BASE

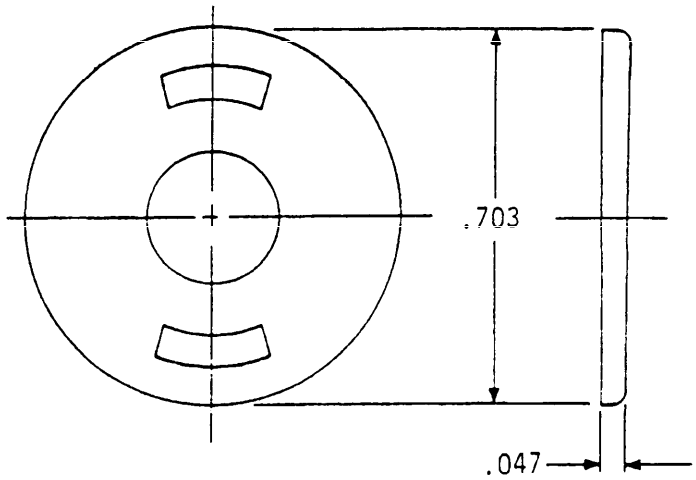

WASHER

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-07 22:22
Check the source to verify that this is the current version before use.

TABLE VIII. STUD AND WASHER CONFIGURATION DASH NUMBERS.


PART	M	LENGTH	MS27977 DASH NO.	
			BLACK	NICKEL PLATE
STUD	.281	.828	-63B	-63N
STUD	.500	1.047	-64B	-64N
WASHER	- -	- -	-65B	-65N

NOTE: STUD AND WASHER, AS APPLICABLE, CONSTITUTE THE MALE HALF OF THE STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

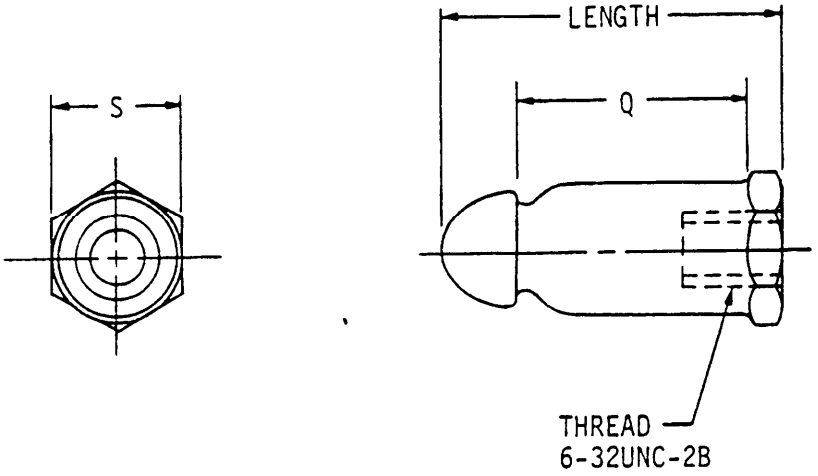

STUD, INTERNAL THREAD

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE IX. STUD CONFIGURATION DASH NUMBERS.

PART	S	Q	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
SHELL CONSTRUCTION WITH CADMIUM PLATED STEEL THREADED INSERT	.344	.531	.531	-66B	-66N
		.766	.766	-67B	-67N
SOLID CONSTRUCTION WITH TAPPED HOLE	.250	.531	.531	-68B	-68N
		.766	.766	-69B	-69N

NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF THE STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)


2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 302


FASTENERS, SNAP, STYLE 1A, SMALL CURTAIN TYPE

APPLICABLE DOCUMENT: MS27978

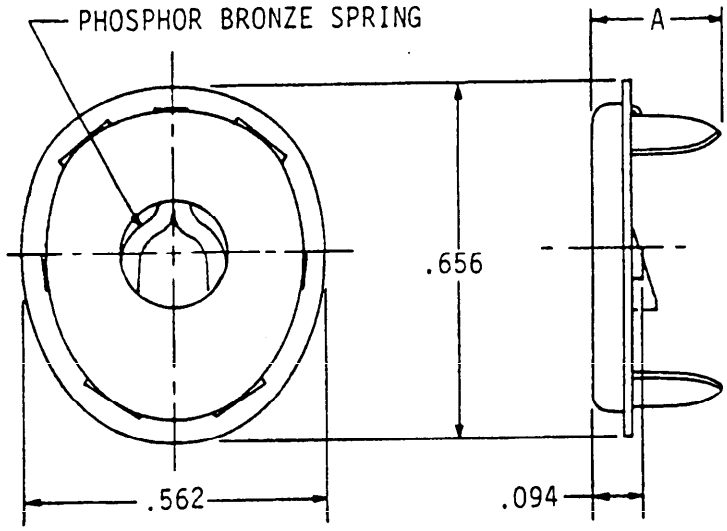

SOCKET

(OPERATES ON SINGLE POINT LIFT PRINCIPLE)

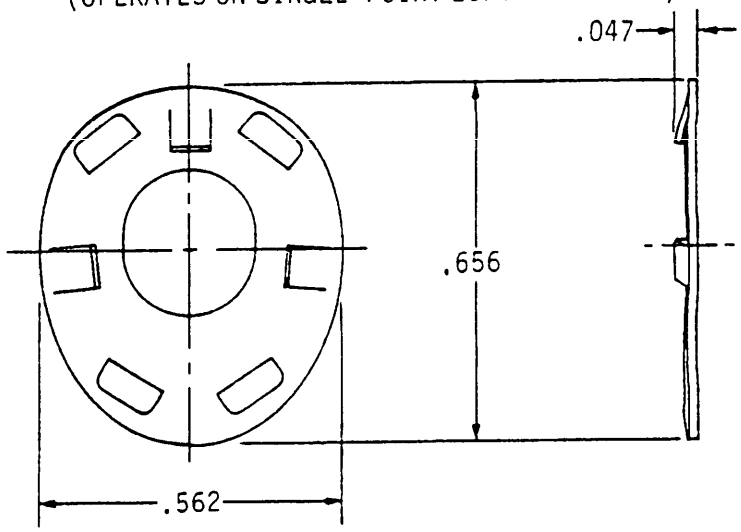

CLINCH PLATE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. CLINCH PLATE AND SOCKET CONFIGURATION DASH NUMBER.

PART	A	MS27978 DASH NO.	
		BLACK	NICKEL PLATE
SOCKET REG. PRONG	.250	-1B	-1N
SOCKET LONG PRONG	.297	-2B	-2N
CLINCH PLATE	- -	-3B	-3N


NOTES: 1. SOCKET AND CLINCH PLATE CONSTITUTE THE FEMALE HALF OF THE STYLE 1A FASTENER. THE FOLLOWING PARTS IN THIS SECTION CONSTITUTE THE MALE HALF.

2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 1A, SMALL CURTAIN TYPE


APPLICABLE DOCUMENT: MS27978

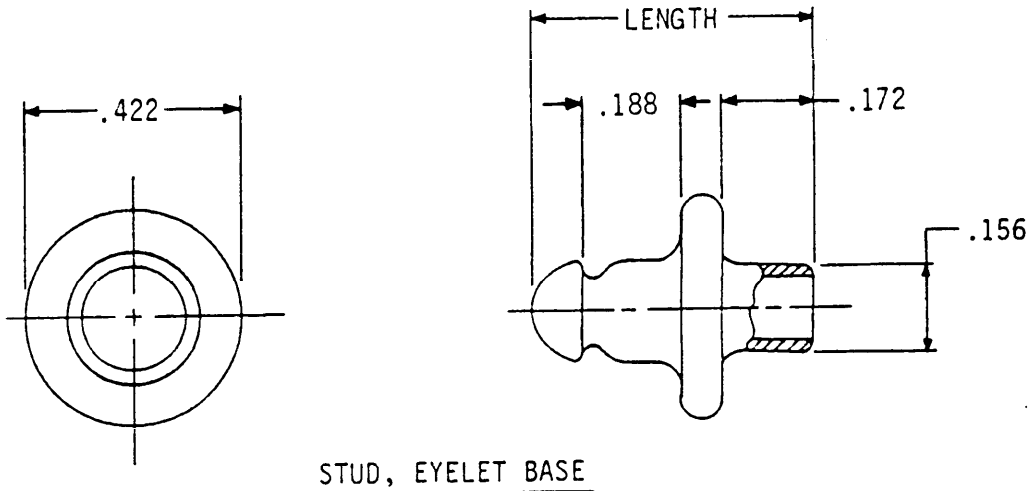

STUD, EYELET BASE

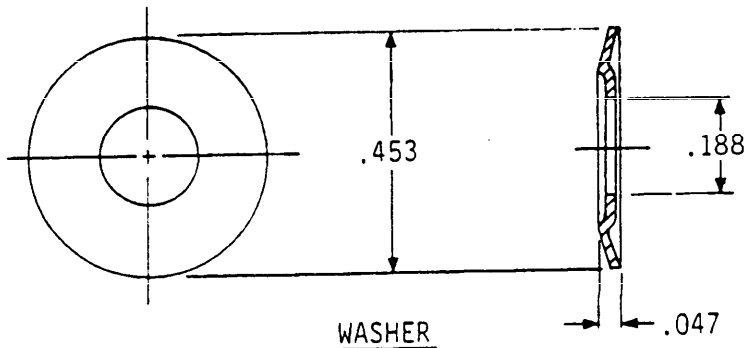

WASHER

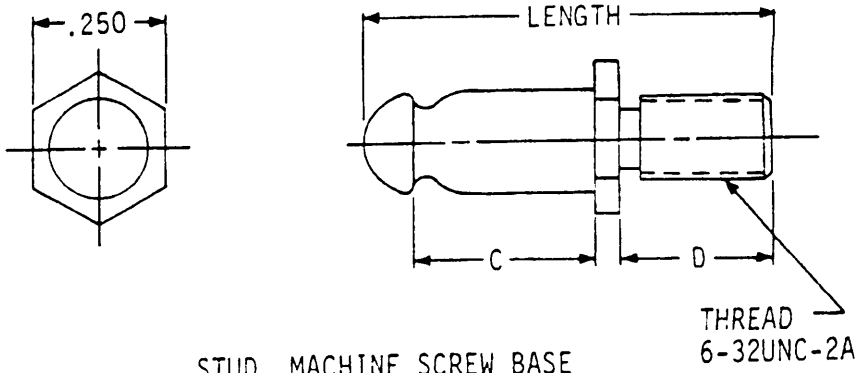

STUD, MACHINE SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE II. STUD AND WASHER CONFIGURATION DASH NUMBERS.

PART	C	D	LENGTH	MS27978 DASH NO.	
				BLACK	NICKEL PLATE
STUD, EYELET BASE	--	--	.531	-4B	-4N
WASHER	--	--	--	-5B	-5N
STUD, MACH SCREW BASE	.188	.312	.641	-6B	-6N
		.438	.766	-7B	-7N
		.562	.891	-8B	-8N
	.344	.312	.797	-9B	-9N
		.438	.922	-10B	-10N
		.562	1.047	-11B	-11N


NOTE: 1. STUD AND WASHER AS APPLICABLE CONSTITUTE THE MALE HALF OF THE STYLE 1A FASTENER. (SEE PAGE 302.1 FOR THE FEMALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 303


FASTENER, SNAP, STYLE 1B, MUD-PROOF CURTAIN TYPE

APPLICABLE DOCUMENT: MS27979

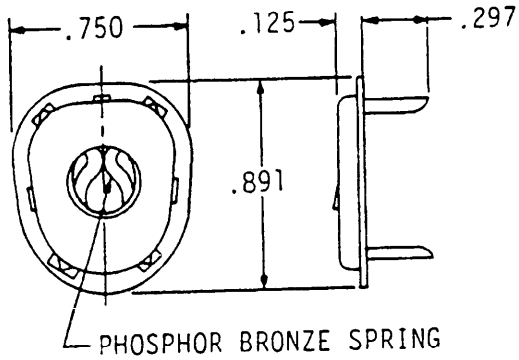

SOCKET

(OPERATES ON SINGLE POINT LIFT PRINCIPLE)

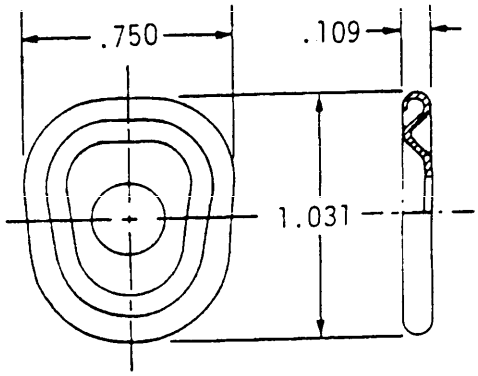

CLINCH PLATE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. CLINCH PLATE AND SOCKET CONFIGURATION DASH NUMBER.


PART	MS27979 DASH NO.
SOCKET	-1
CLINCH PLATE	-2

NOTE: 1. SOCKET AND CLINCH PLATE CONSTITUTE THE FEMALE HALF OF STYLE 1B FASTENER. (SEE PAGE 303.1 FOR THE MALE HALF.)


2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENER, SNAP, STYLE 1B, MUD-PROOF CURTAIN TYPE
APPLICABLE DOCUMENT: MS27979

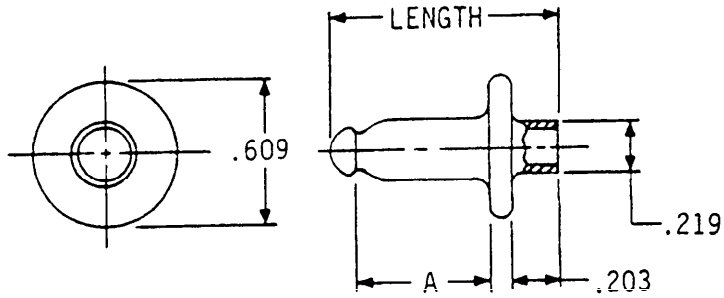

STUD, EYELET BASE

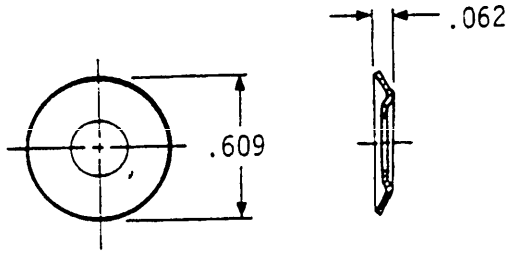

WASHER

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE II. STUD AND WASHER CONFIGURATION DASH NUMBERS.

PART	A	LENGTH	MS27979 DASH NO.
STUD, EYELET BASE	.172	.578	-5
STUD, EYELET BASE	.359	.766	-4
STUD, EYELET BASE	.562	.969	-3
WASHER	- -	- -	-6


NOTE: STUD, AS APPLICABLE CONSTITUTES THE MALE HALF OF THE STYLE 1B FASTENER. (SEE PAGE 303.1 FOR THE FEMALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


SECTION 304

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE

APPLICABLE DOCUMENT: MS27980

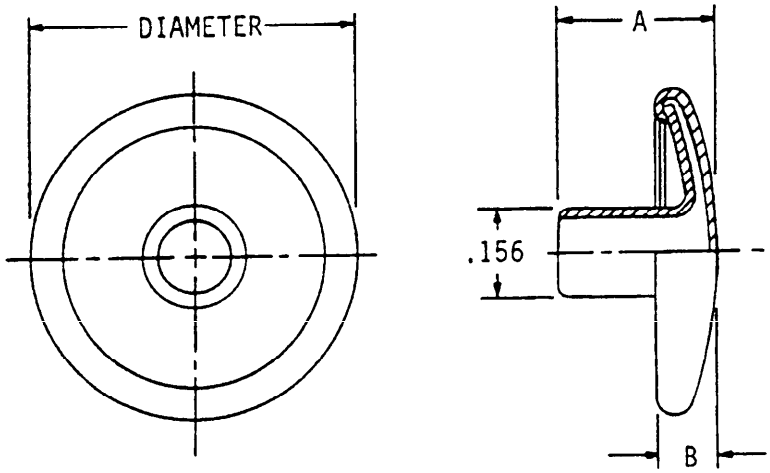

BUTTON

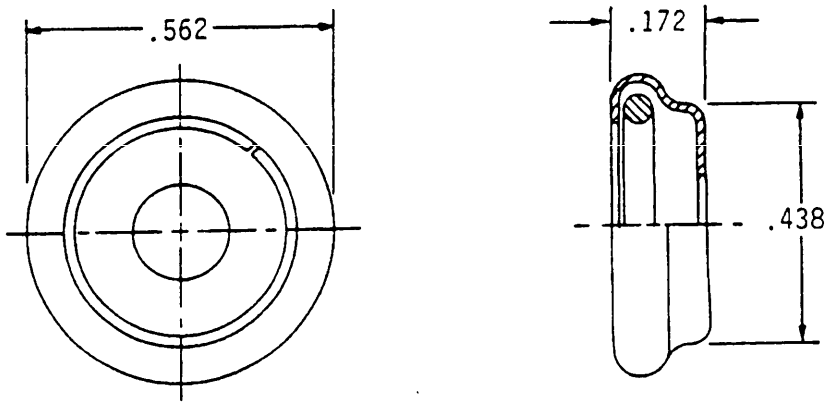

SOCKET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. BUTTON AND SOCKET CONFIGURATION DASH NUMBERS.


DIAMETER	A	B	MS27980 DASH NO.	
			BLACK	NICKEL PLATE
.600	.281	.109	-1B	-1N
.600	.375	.109	-2B	-2N
.500	.297	.109	-3B	-3N
.750	.297	.156	-4B	-4N

NOTE: BUTTON AND SOCKET, AS APPLICABLE, CONSTITUTE THE FEMALE HALF OF THE STYLE 2 FASTENER. THE FOLLOWING PARTS IN THIS SECTION CONSTITUTE THE MALE HALF.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE

APPLICABLE DOCUMENT: MS27980

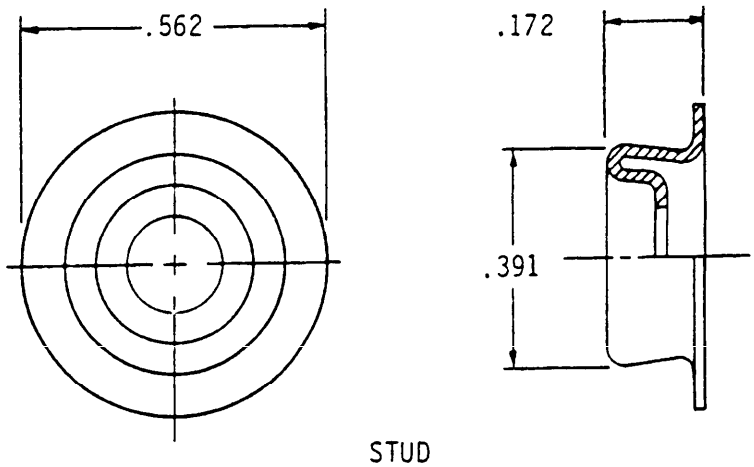

STUD

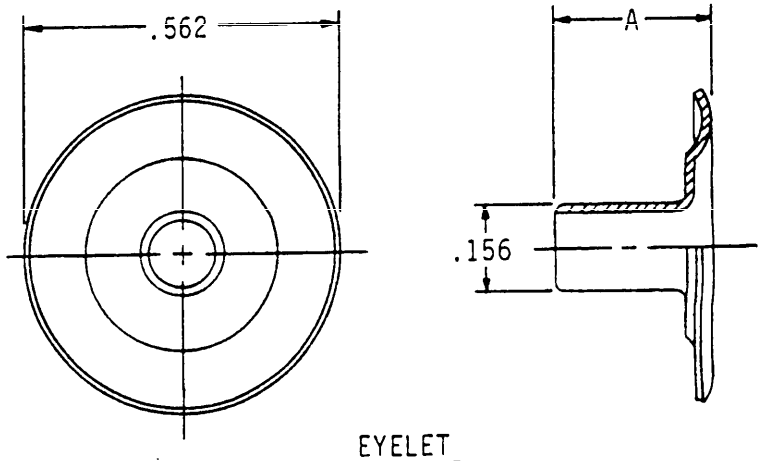

EYELET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE II. STUD AND EYELET CONFIGURATION DASH NUMBERS.


PART	A	MS27980 DASH NO.	
		BLACK	NICKEL PLATE
STUD	– –	-7B	-7N
EYELET	.281	-8B	-8N
EYELET	.344	-9B	-9N

NOTE: STUD AND EYELET, AS APPLICABLE, CONSTITUTE THE MALE HALF OF THE STYLE 2 FASTENER. (SEE PAGE 304.1 FOR THE FEMALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE

APPLICABLE DOCUMENT: MS27980

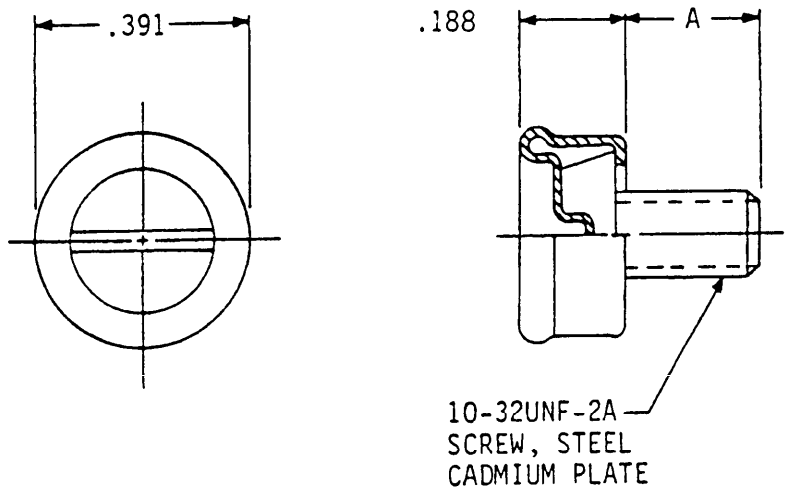

STUD, MACHINE SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

TABLE III. STUD CONFIGURATION DASH NUMBERS.

A	MS27980 DASH NO.	
	BLACK	NICKEL PLATE
.250	-15B	-15N
.312	-16B	-16N
.375	-17B	-17N
.625	-18B	-18N


NOTES: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF THE STYLE FASTENER. (SEE PAGE 304.1 FOR THE FEMALE HALF.)

2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

Source: https://assistdocs.com -- Downloaded at 2026-02-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE

APPLICABLE DOCUMENT: MS27980

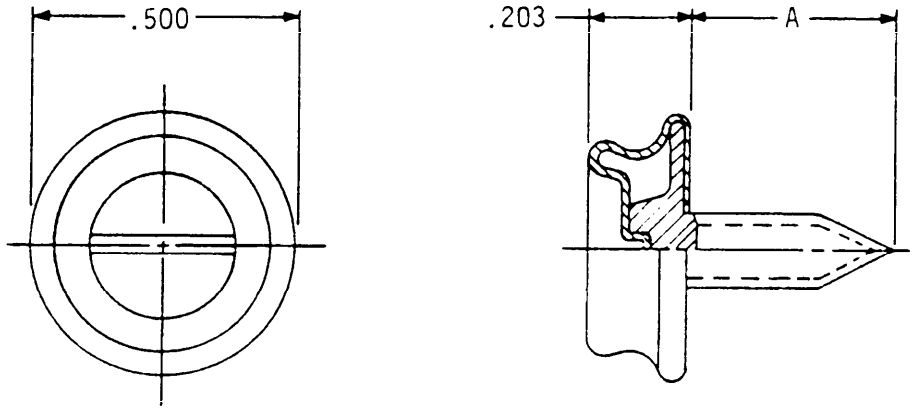

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE


TABLE IV. STUD CONFIGURATION DASH NUMBERS.

PART	SCREW SIZE	A	MS27980 DASH NO.	
			BLACK	NICKEL PLATE
STUD, WOOD SCREW BASE	NO. 7	.625	-19B	-19N
STUD, SELF-TAPPING SCREW BASE	NO. 7	.375	-20B	-20N
STUD, SELF-TAPPING SCREW BASE	NO. 10	.625	-21B	-21N

NOTE: STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF THE STYLE 2 FASTENER. (SEE PAGE 304.1 FOR THE FEMALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE
APPLICABLE DOCUMENT: MS27980

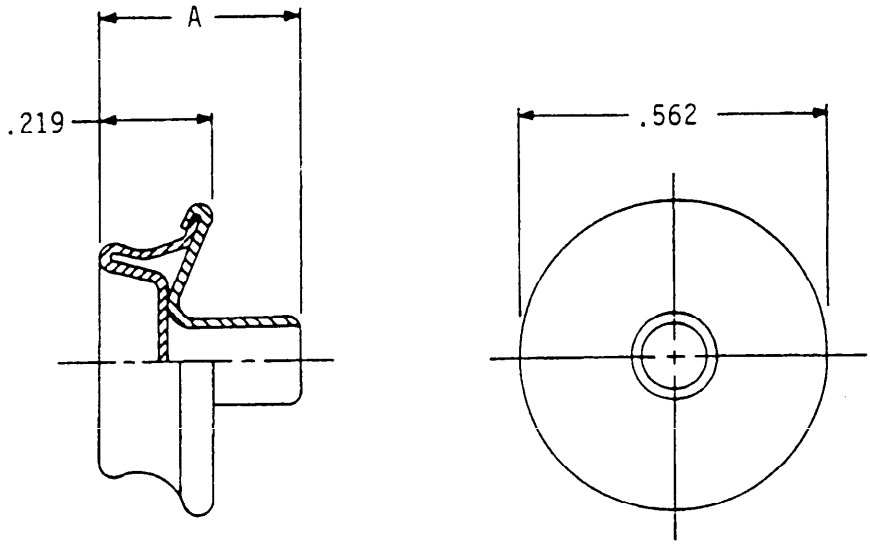

STUD-EYELET COMBINATION

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

TABLE V. STUD CONFIGURATION DASH NUMBERS.

PART	A	MS27980 DASH NO.	
		BLACK	NICKEL PLATE
STUD-EYELET COMB.	.344	-26B	-26N
STUD-EYELET COMB.	.391	-27B	-27N

NOTE: STUD AND EYELET COMBINATION, AS APPLICABLE, CONSTITUTE THE MALE HALF OF THE STYLE 2 FASTENER. (SEE PAGE 304.1 FOR THE FEMALE HALF.)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


SECTION 305

FASTENERS, SNAP, STYLE 2A, SMALL WIRE SPRING CLAMP TYPE

APPLICABLE DOCUMENT: MS27981

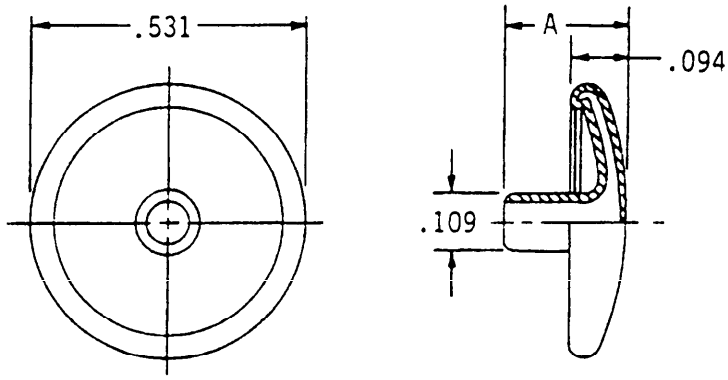

BUTTON

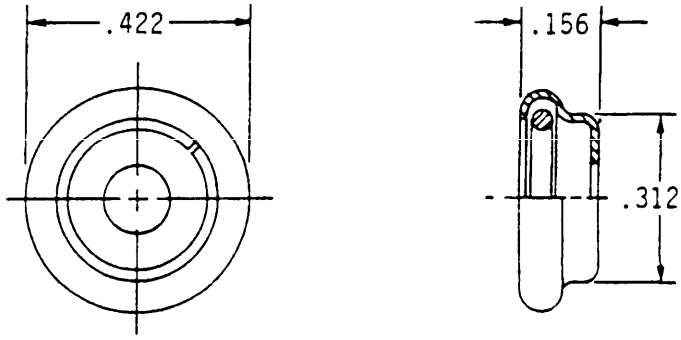

SOCKET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


TABLE I. BUTTON AND SOCKET CONFIGURATION DASH NUMBERS.

PART	A	MS27981 DASH NO.	
		BLACK	NICKEL PLATE
BUTTON	.219	-1B	-1N
BUTTON	.281	-2B	-2N
SOCKET	- -	-3B	-3N


NOTE: BUTTON AND SOCKET, AS APPLICABLE, CONSTITUTE THE FEMALE HALF OF THE STYLE 2A FASTENER. (SEE PAGE 305.3 FOR THE MALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 2A, SMALL WIRE SPRING CLAMP TYPE
APPLICABLE DOCUMENT: MS27981

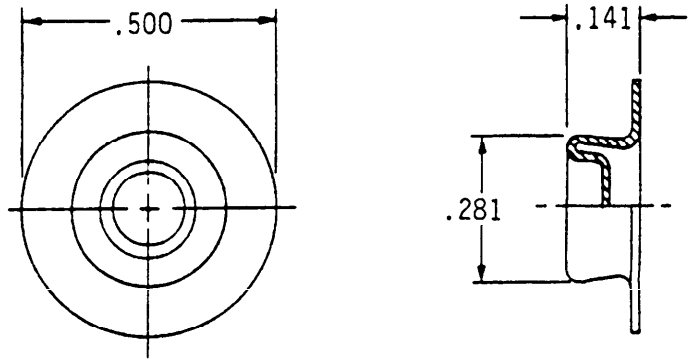

STUD

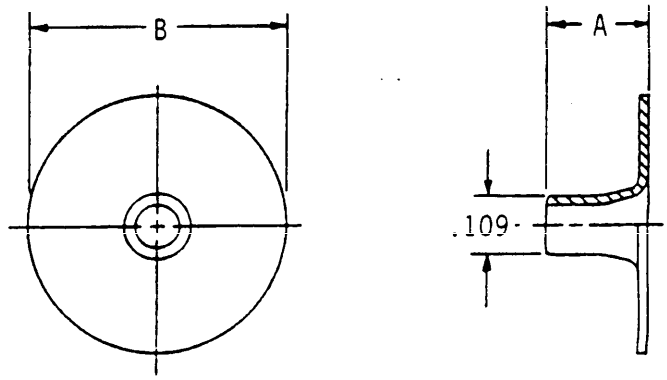

EYELET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE II. STUD AND EYELET CONFIGURATION DASH NUMBERS.

PART	A	B	MS27981 DASH NO.	
			BLACK	NICKEL PLATE
STUD	--	--	-4B	-4N
EYELET	.188	.500	-5B	-5N
EYELET	.250	.500	-6B	-6N


NOTE: STUD AND EYELET, AS APPLICABLE, CONSTITUTE THE MALE HALF OF STYLE 2A FASTENER. (SEE PAGE 305.1 FOR THE FEMALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


SECTION 306

FASTENERS, SNAP, STYLE 3, PRONGED RING-HEAD TYPE

APPLICABLE DOCUMENT: MS27982

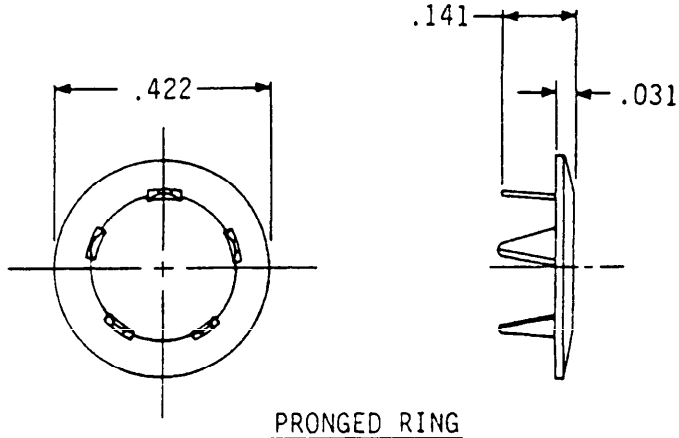

PRONGED RING

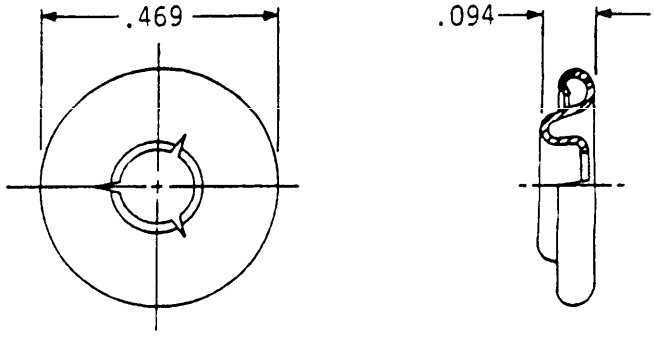

SOCKET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


TABLE II. PRONGED RING AND SOCKET CONFIGURATION DASH NUMBERS.

PART	MS27982 DASH NO.	
	BLACK	NICKEL PLATE
PRONGED RING	-1B	-1N
SOCKET	-2B	-2N


NOTE: PRONGED RING AND SOCKET CONSTITUTE THE FEMALE HALF OF THE STYLE 3 FASTENER. (SEE PAGE 306.3 FOR THE MALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

FASTENERS, SNAP, STYLE 3, PRONGED RING-HEAD TYPE
APPLICABLE DOCUMENT: MS27982

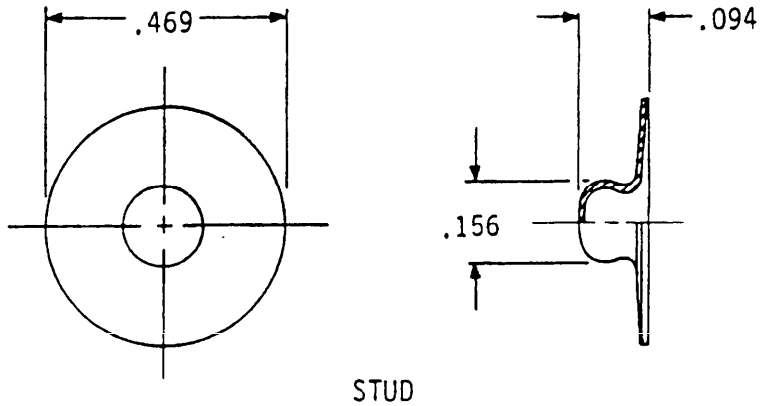

STUD

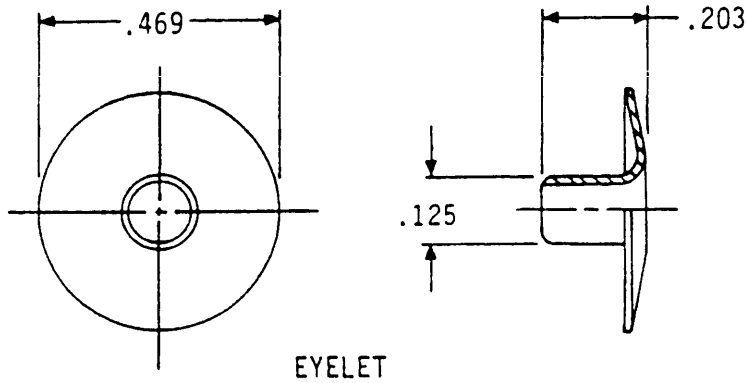

EYELET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE II. STUD AND EYELET CONFIGURATION DASH NUMBERS.

PART	MS27982 DASH NO.	
	BLACK	NICKEL PLATE
STUD	-4B	-4N
EYELET	-5B	-5N


NOTE: STUD AND EYELET CONSTITUTE THE MALE HALF STYLE 3 FASTENER. (SEE PAGE 306.1 FOR THE FEMALE HALF.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


SECTION 307

FASTENERS, SNAP, STYLE 4, THREE WAY LOCKING TYPE

APPLICABLE DOCUMENT: MS27983

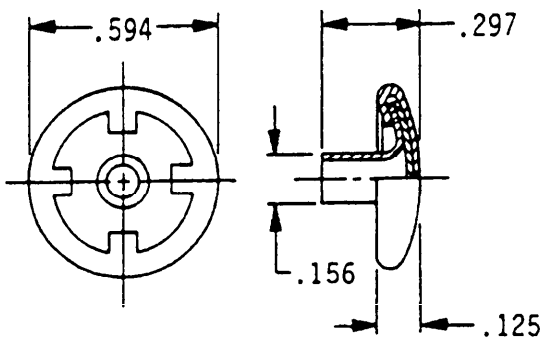


BUTTON

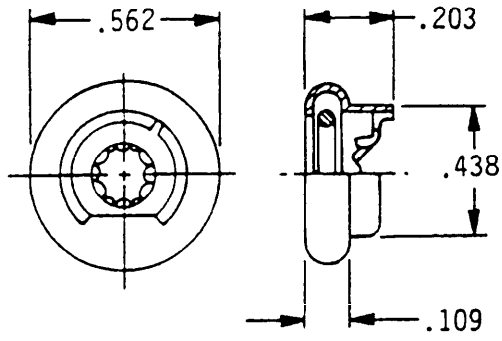


SOCKET

(OPERATES ON SINGLE POINT PULL PRINCIPLE)

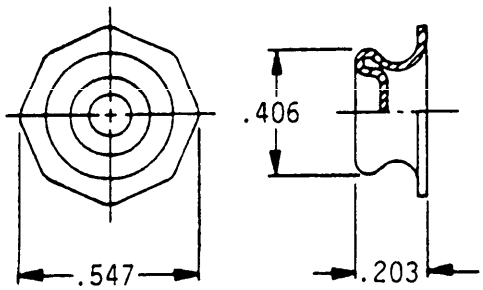

STUD

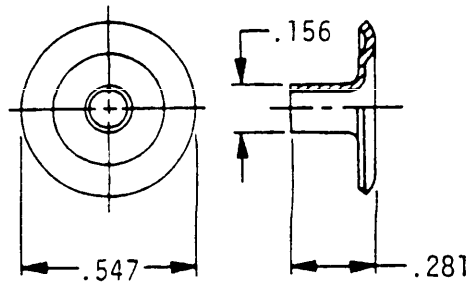

EYELET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. FASTENER CONFIGURATION DASH NUMBERS.

PART	MS27983 DASH NO.	
	BLACK	NICKEL PLATE
BUTTON	-1	-1N
SOCKET	-2	-2N
STUD	-3	-3N
EYELET	-4	-4N


NOTES: 1. BUTTON AND SOCKET CONSTITUTE FEMALE HALF OF STYLE 4 FASTENER.
2. STUD AND EYELET CONSTITUTE MALE HALF OF STYLE 4 FASTENER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 308

FASTENERS, SNAP, STYLE 7, RIVET TYPE

APPLICABLE DOCUMENT: MS27986

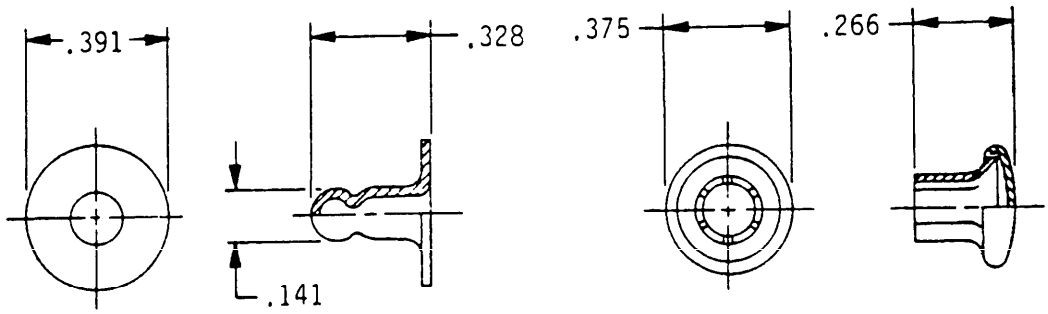

POST, LARGE

CAP, LARGE

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

TABLE I. FASTENER CONFIGURATION DASH NUMBERS.

PART	MS27986 DASH NO.	
	BLACK	NICKEL PLATE
POST, LARGE	-3B	-3N
CAP, LARGE	-4B	-4N


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 401

FASTENER-SNAPSLIDE

APPLICABLE DOCUMENTS: MS21332 AND MS21327

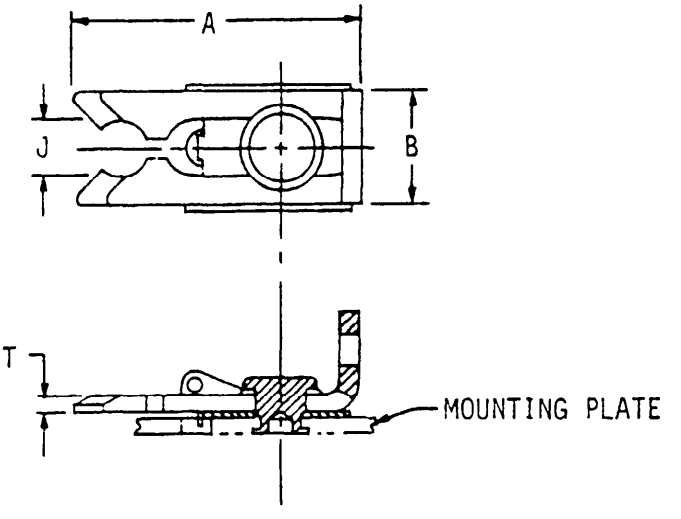

MATERIAL	PROTECTIVE FINISH
LATCH: CRES	PASSIVATE
LATCH GUIDE: CRES	PASSIVATE
RIVET: NI-CU ALLOY	PASSIVATE
WASHER: PHOSPHOR BRONZE	NICKEL PLATE

TABLE I. FASTENER CONFIGURATION DASH NUMBERS.

A	B	J	T	MS21332 DASH NO.
1.125	.438	.187	.050	-4
1.469	.562	.250	.078	-1

NOTE: TO BE USED WITH THE STUDS ON MS21323, MS21325 OR MS21326. (SEE SECTION 500.)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 501

STUD, STYLE I, SNAPSLIDE FASTENER

APPLICABLE DOCUMENT: MS21323

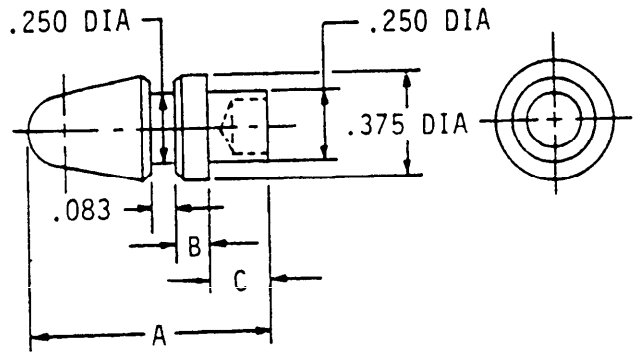

MATERIAL	PROTECTIVE FINISH
CRES	PASSIVATE

TABLE I. STUD CONFIGURATION DASH NUMBERS.

A	B	C	MS21323 DASH NO.
.736	.080	.156	-1
.792	.105	.188	-2
.792	.250	.156	-3

NOTE: TO BE USED WITH MS21332 (SEE 401.1).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assistdla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 502

STUD, STYLE III, SNAPSLIDE FASTENER

APPLICABLE DOCUMENT: MS21325

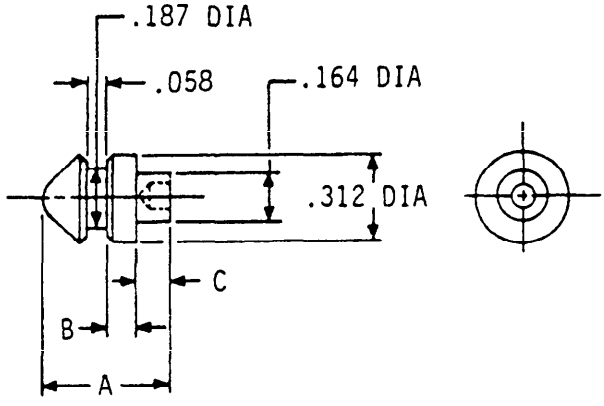

MATERIAL	PROTECTIVE FINISH
CRES	PASSIVATE

TABLE I. STUD CONFIGURATION DASH NUMBERS.

A	B	C	D	MS21325 DASH NO.
.406	.105	.109	.094	-1
.578	.075	.312	.094	-2
.453	.156	.125	.094	-3
.375	.062	.125	.094	-4
.359	.075	.094	.078	-5

NOTE: TO BE USED WITH MS21332 (SEE 401.1).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 503

STUD, STYLE IV, SNAPSLIDE FASTENER

APPLICABLE DOCUMENT: MS21326

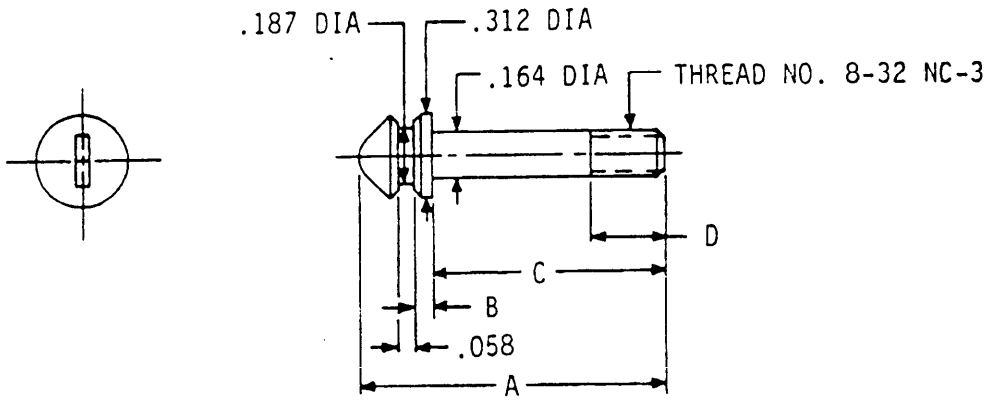

MATERIAL	PROTECTIVE FINISH
CRES	PASSIVATE

TABLE I. STUD CONFIGURATION DASH NUMBERS.

A	B	C	D	MS21326 DASH NO.
.641	.105	.344	.281	-1
.641	.077	.375	.312	-2
.797	.075	.531	.375	-3
.969	.091	.688	.375	-4
1.062	.055	.812	.500	-5
1.125	.105	.828	.500	-6

NOTE: TO BE USED WITH MS21322 (SEE 401.1).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 601

FASTENER, ROTARY, QUICK-OPERATING, FLUSH HEAD
FLOATING TYPE, 2210 LBS. MINIMUM TENSILE STRENGTH

APPLICABLE DOCUMENT: MS17731

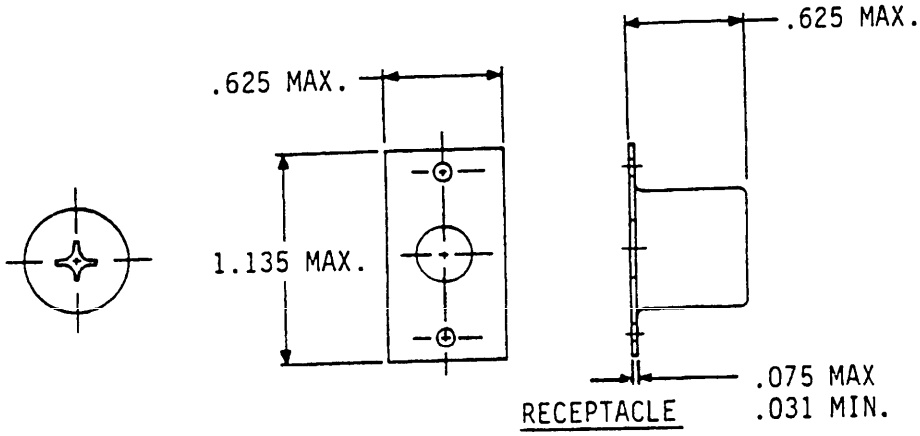

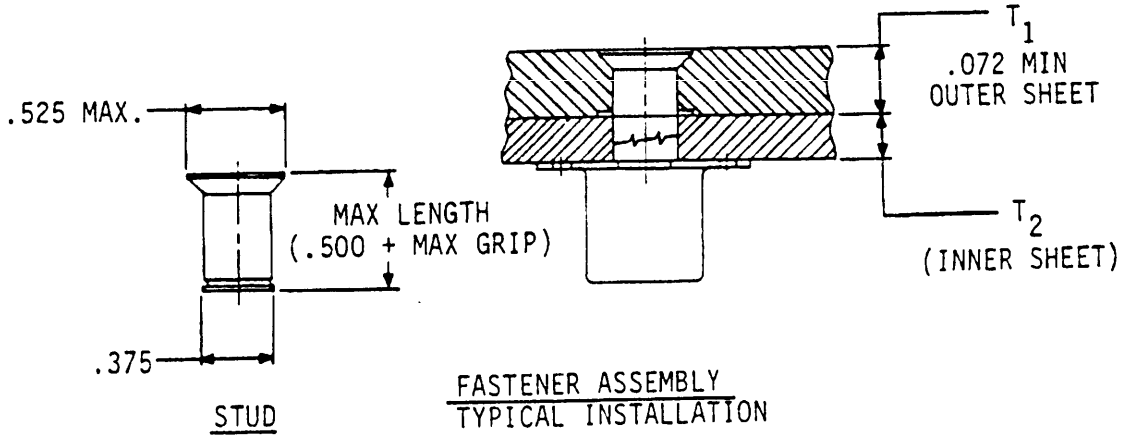

MATERIALS	TENSILE STRENGTH LBS. MIN.	PROTECTIVE FINISH	TEMP (MAX.)
STEEL CARBON & ALLOY	2210	CADMIUM PLATE	500°F

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. FASTENER CONFIGURATION DASH NUMBERS.


GRIP RANGE	WEIGHT - LBS MAXIMUM		MS17731 DASH NO.
$T_1 + T_2$	STUD	RECEPTACLE	
.150 - .220	.015	.025	-1
.221 - .290	.016		-2
.291 - .360	.018		-3
.361 - .430	.020		-4
.431 - .500	.021		-5
.501 - .570	.022		-6
.571 - .640	.024		-7
.641 - .710	.026		-8
.711 - .780	.028		-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


SECTION 602

FASTENER, ROTARY, QUICK-OPERATING, PROTRUDING HEAD, FLOATING TYPE, 2210 LBS. MINIMUM TENSILE STRENGTH


APPLICABLE DOCUMENT: MS17732

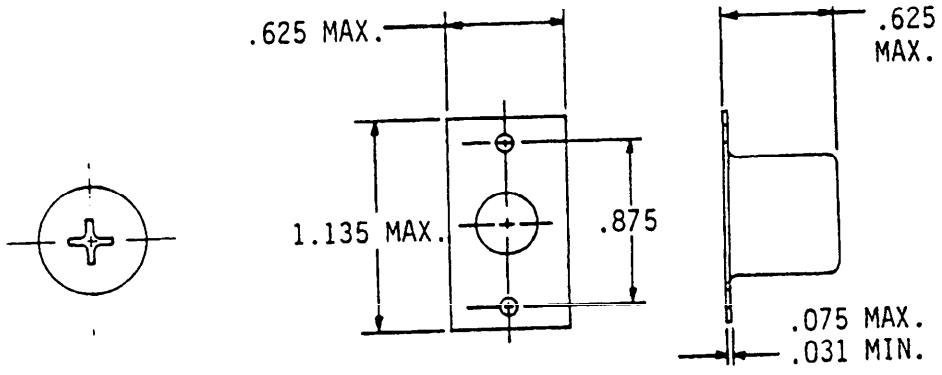

RECEPTACLE

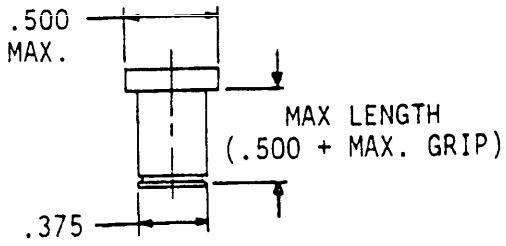

STUD

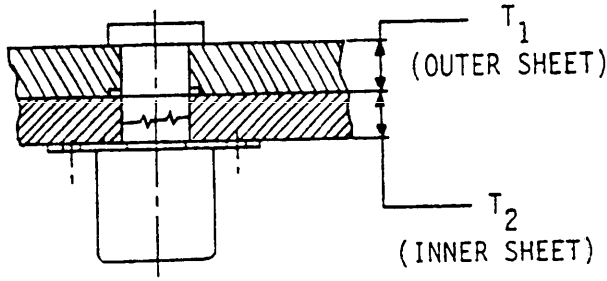

FASTENER ASSEMBLY
TYPICAL INSTALLATION

MATERIALS	TENSILE STRENGTH LBS. MIN.	PROTECTIVE FINISH	TEMP (MAX.)
STEEL CARBON & ALLOY	2210	CADMIUM PLATE	500°F

Source: https://assist.dla.mil -- Downloaded: 2026-04-07T1:52Z
Check the source to verify that this is the current version before use.

TABLE I. FASTENERS CONFIGURATION DASH NUMBERS.

GRIP RANGE	WEIGHT - LBS MAXIMUM		MS17732 DASH NO.
$T_1 + T_2$	STUD ASSY	RECEPTACLE ASSEMBLY	
.116 - .185	.016	.025	-1
.186 - .255	.018		-2
.256 - .325	.020		-3
.326 - .395	.021		-4
.396 - .465	.023		-5
.466 - .535	.025		-6
.536 - .605	.027		-7
.606 - .675	.030		-8
.676 - .745	.033		-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 701


GROMMETS, METALLIC, PLAIN AND SPUR, WITH WASHER TYPE I AND TYPE III

APPLICABLE DOCUMENT: MS20230

TYPE I, PLAIN GROMMET




PLAIN WASHER

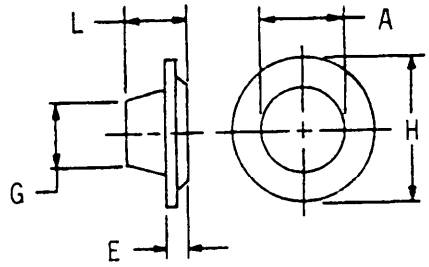


PLAIN GROMMET

MATERIAL	PROTECTIVE FINISH
BRASS	PLAIN OR CADMIUM PLATE
ALUMINUM	ANODIZE

TYPE III, SPUR GROMMET



SPUR WASHER

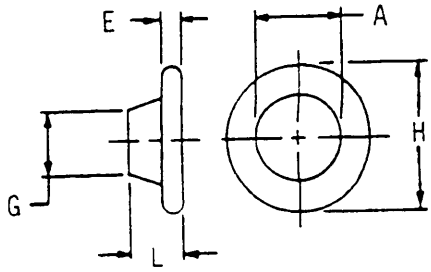

ROLLED RIM GROMMET

MATERIAL	PROTECTIVE FINISH
BRASS	PLAIN OR CADMIUM PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. PLAIN GROMMET CONFIGURATION DASH NUMBERS.

A DIA AFTER INSERTION	B	C	E	G	H	L	MS20230 DASH NO.		
							AL	BRASS	
								PLAIN	PLATED
.156	.460	.029	.035	.176	.425	.170	A20	B20	BP20
.250	.546	.030	.035	.240	.545	.210	A10	B10	BP10
.312	.700	.041	.035	.286	.687	.220	A1	B1	BP1
.375	.835	.045	.035	.362	.815	.250	A2	B2	BP2
.438	.955	.050	.050	.433	.970	.345	A3	B3	BP3
.500	1.062	.050	.046	.486	1.050	.420	A4	B4	BP4
.625	1.205	.055	.045	.594	1.220	.375	A5	B5	BP5

TABLE II. SPUR GROMMET CONFIGURATION DASH NUMBERS.


A DIA AFTER INSERTION	B	E	G	H	L	MS20230 DASH NO.	
						PLAIN	PLATED
.250	.645	.060	.270	.670	.235	BS10	BPS10
.312	.790	.065	.380	.790	.275	BS1	BPS1
.375	.890	.070	.425	.890	.315	BS2	BPS2
.438	.970	.075	.430	.970	.330	BS3	BPS3
.500	1.120	.080	.560	1.120	.405	BS4	BPS4
.625	1.270	.085	.600	1.285	.455	BS5	BPS5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.


SECTION 801

GROMMET-DRAINAGE, PLASTIC

APPLICABLE DOCUMENT: AN231

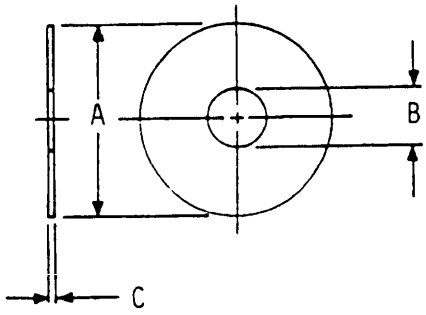

DASH NOS.
1 AND 2

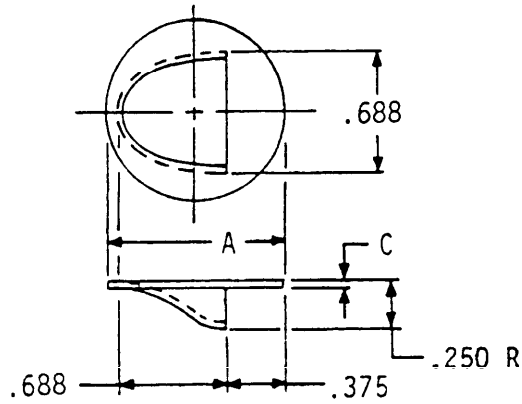

DASH NO. 4

MATERIAL	PROTECTIVE FINISH
CELLULOSE ACETATE BUTYRATE	NONE

TABLE I. CROMMET CONFIGURATION DASH NUMBERS.

A	B	C	AN231 DASH NO.
1.250	.375	.0200	-1
.750	.312	.0200	-2
1.187	- -	.0325	-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 802

GROMMET, PLASTIC, EDGING

APPLICABLE DOCUMENT: MS21266

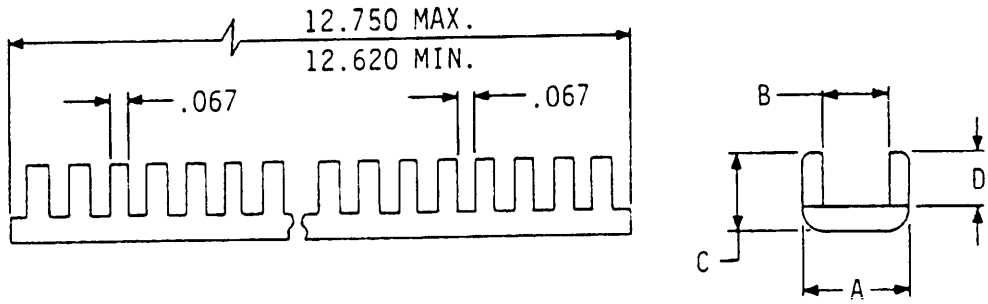

MATERIAL	PROTECTIVE FINISH
NYLON	NONE
POLYTETRA-FLUOROETHYLENE	NONE

TABLE I. GROMMET CONFIGURATION DASH NUMBERS.


SHEET THICKNESS (REF)	A	B	C	D	MS21266 DASH NO.	
					NYLON	POLYTETRA-FLUOROETHYLENE
.015 - .052	.150	.056	.155	.100	-1N	-1T
.052 - .085	.175	.090	.155	.100	-2N	-2T
.085 - .128	.220	.131	.155	.100	-3N	-3T
.128 - .192	.325	.195	.230	.160	-4N	-4T
.192 - .255	.385	.260	.240	.170	-5N	-5T
.255 - .318	.445	.320	.255	.180	-6N	-6T

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 803

GROMMET-PLASTIC FLIP TYPE
APPLICABLE DOCUMENT: NAS1368

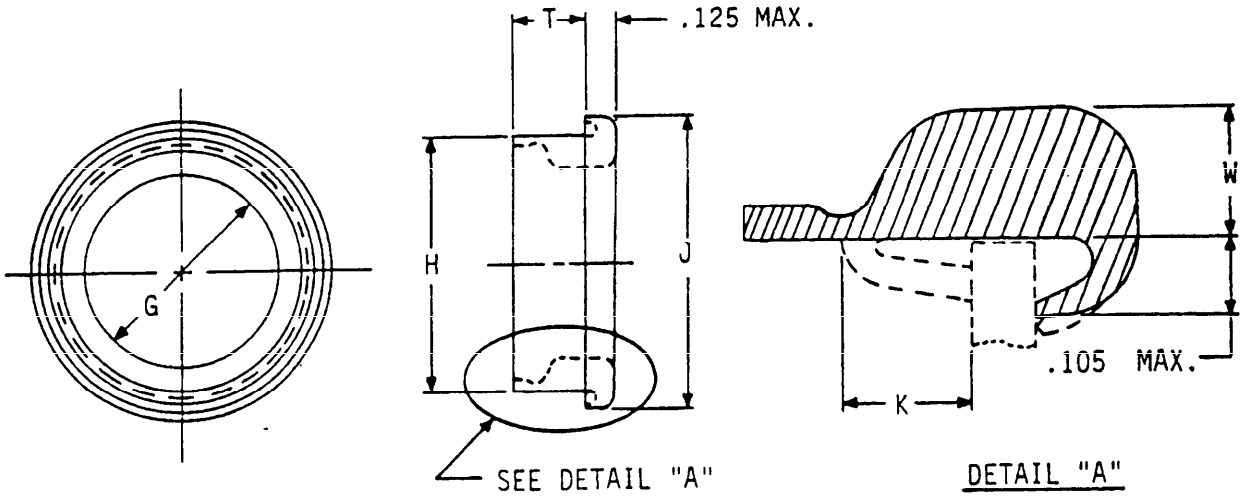

MATERIAL	PROTECTIVE FINISH
NYLON (SEE NOTE)	NONE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. GROMMET CONFIGURATION DASH NUMBERS.

G	W.	H	J	K APPROX	T	STRUCTURE THICKNESS	NAS1368 DASH NO.
.250	.058	.367	.567	.100	.235	.025 TO .080	N4A
					.295	.081 TO .140	N4B
					.360	.141 TO .200	N4C
					.420	.201 TO .250	N4D
.375	.058	.492	.692	.100	.235	.025 TO .080	N6A
					.295	.081 TO .140	N6B
					.360	.141 TO .200	N6C
					.420	.201 TO .250	N6D
.500	.058	.615	.815	.100	.235	.025 TO .080	N8A
					.295	.081 TO .140	N8B
					.360	.141 TO .200	N8C
					.420	.201 TO .250	N8D
.750	.083	.896	1.096	.100	.235	.025 TO .080	N12A
					.295	.081 TO .140	N12B
					.360	.141 TO .200	N12C
					.420	.201 TO .250	N12D
1.000	.104	1.178	1.378	.120	.275	.025 TO .080	N16A
					.335	.081 TO .140	N16B
					.400	.141 TO .200	N16C
					.460	.201 TO .250	N16D
1.500	.104	1.673	1.873	.120	.275	.025 TO .040	N24F
					.335	.041 TO .091	N24H
					.400	.092 TO .160	N24K
					.460	.161 TO .220	N24L
2.000	.104	2.173	2.373	.120	.275	.025 TO .040	N32F
					.335	.041 TO .091	N32H
					.400	.092 TO .160	N32K
					.460	.161 TO .220	N32L


NOTE: NYLON - TO BE USED WHERE TEMPERATURE DOES NOT EXCEED
-65° TO 300°F FOR 2,000 HOUR SERVICE LIFE
-65° TO 240°F FOR 12,000 HOUR SERVICE LIFE
-65° TO 200°F FOR 60,000 HOUR SERVICE LIFE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 804

GROMMET, PLASTIC-SPLIT


APPLICABLE DOCUMENT: NAS557

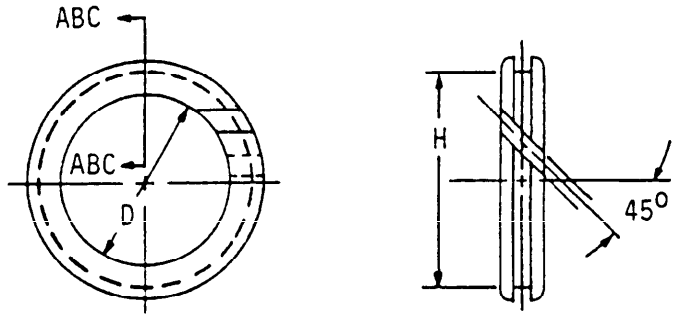




SECTION A-A

DASH NOS.
3 THRU 6



SECTION B-B

DASH NOS.
8 THRU 20



SECTION C-C

DASH NOS.
22 THRU 48

MATERIAL	PROTECTIVE FINISH
NYLON	NONE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. GROMMET CONFIGURATION DASH NUMBERS.

SECTION	SHEET THICKNESS (REF)	D INSTALLED DIA	H	NAS557 DASH NO.
A-A	.025 - .051	.188	.241	-3
		.250	.303	-4
		.375	.429	-6
B-B	.064 - .081	.500	.601	-8
		.625	.726	-10
		.750	.851	-12
		.875	.976	-14
		1.000	1.101	-16
		1.125	1.226	-18
		1.250	1.351	-20
C-C	.091 - .125	1.375	1.507	-22
		1.500	1.632	-24
		1.750	1.882	-28
		2.000	2.132	-32
		2.250	2.382	-36
		2.500	2.632	-40
		2.750	2.882	-44
		2.875	3.007	-46
		3.000	3.132	-48


NOTE: TO BE USED WHERE TEMPERATURE DOES NOT EXCEED 350°F

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

SECTION 901

GROMMETS, SYNTHETIC AND SILICONE RUBBER, HOT OIL AND COOLANT RESISTANT

APPLICABLE DOCUMENT: MS35489

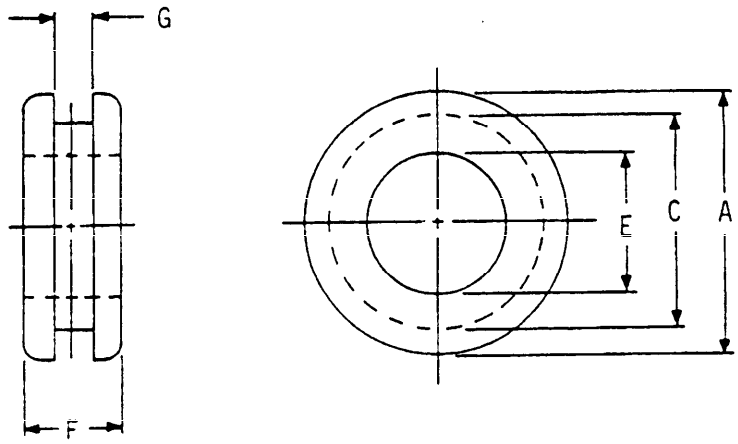

MATERIAL	PROTECTIVE FINISH
RUBBER, SYNTHETIC	NONE
RUBBER, SILICONE	NONE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

TABLE I. GROMMET CONFIGURATION DASH NUMBERS.

E	C	A	G							
			0.062		0.125		0.188		0.250	
			MS35489 DASH NO.	F	MS35489 DASH NO.	F	MS35489 DASH NO.	F	MS35489 DASH NO.	F
0.125	0.250	0.344	1	0.188						
0.125	0.562	0.750	2	0.188	31	0.250	60	0.312	89	0.375
0.125	1.000	1.250	3	0.250	32	0.312	61	0.375	90	0.438
0.188	0.312	0.438	4	0.188	33	0.250	62	0.312	91	0.375
0.188	0.562	0.750	134	0.188	137	0.250	138	0.312	139	0.375
0.188	0.625	0.875	5	0.188	34	0.250	63	0.312	92	0.375
0.250	0.438	0.625	6	0.188	35	0.250	64	0.312	93	0.375
0.250	0.750	1.000	7	0.250	36	0.312	65	0.375	94	0.438
0.250	1.000	1.250	8	0.250	37	0.312	66	0.375	95	0.438
0.312	0.562	0.812	9	0.312	38	0.375	67	0.438	96	0.500
0.312	0.750	1.000	10	0.312	39	0.375	68	0.438	97	0.500
0.312	0.812	1.062	118	0.312	122	0.375	136	0.438	130	0.500
0.375	0.625	0.875	11	0.312	40	0.375	69	0.438	98	0.500
0.375	1.000	1.250	12	0.250	41	0.312	70	0.375	99	0.438
0.438	0.688	0.938	13	0.312	42	0.375	71	0.438	100	0.500
0.500	0.812	1.062	14	0.312	43	0.375	72	0.438	101	0.500
0.500	1.250	1.500	15	0.250	44	0.312	73	0.375	102	0.438
0.562	0.812	1.062	16	0.312	45	0.375	74	0.438	103	0.500
0.625	0.875	1.125	17	0.312	46	0.375	75	0.438	104	0.500
0.625	1.250	1.500	18	0.250	47	0.312	76	0.375	105	0.438
0.688	1.000	1.312	19	0.375	48	0.438	77	0.500	106	0.562
0.750	1.062	1.375	20	0.375	49	0.438	78	0.500	107	0.562
0.750	1.250	1.625	135	0.250	123	0.312	127	0.375	131	0.438
0.750	1.438	1.812	21	0.375	50	0.438	79	0.500	108	0.562
0.750	1.625	2.000	120	0.375	124	0.438	128	0.500	132	0.562
0.875	1.250	1.625	22	0.438	51	0.500	80	0.562	109	0.625
0.875	1.625	2.000	121	0.438	125	0.500	129	0.562	133	0.625
1.000	1.375	1.750	23	0.438	52	0.500	81	0.562	110	0.625
1.000	1.875	2.250	24	0.438	53	0.500	82	0.562	111	0.625
1.250	2.375	2.750	25	0.438	54	0.500	83	0.562	112	0.625
1.250	2.500	2.875	26	0.438	55	0.500	84	0.562	113	0.625
1.500	1.750	2.125	27	0.438	56	0.500	85	0.562	114	0.625
1.500	2.750	3.250	28	0.438	57	0.500	86	0.562	115	0.625
1.750	3.250	3.750	29	0.500	58	0.562	87	0.625	116	0.688
2.000	3.500	4.000	30	0.500	59	0.562	88	0.625	117	0.688

NOTE: ADD "X" AFTER DASH NUMBER FOR SILICONE RUBBER GROMMET.

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/327

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation.

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 3, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 8 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Aeronautical Systems Division (AFSC)
ATTN: ASD/ENESS
Wright-Patterson AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 20260-20T04:52Z
Check the source to verify that this is the current version before use.