MILITARY SPECIFICATION

CAP, WOMAN'S, HOT WEATHER

1. SCOPE

1.1 Scope. This specification covers one type of hot weather, woman's cap that is a universal size.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

L-P-378	Plastic Sheet and Strip, Thin Gauge, Polyolefin
L-P-386	Plastic Material, Cellular Urethane (Flexible)
V-T-285	Thread, Polyester
DDD-L-20	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-676	Boxes, Setup

Military

MIL-F-10884	Fasteners, Snap
MIL-T-43548	Thread, Polyester, Cotton-Covered
MIL-C-82282	Cloth, Poplin: Cotton and Polyester, Water Repellent

STANDARDS

Federal

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Classification

(Copies of this publication can be obtained from the American Trucking Association, Inc.; Attention: Tariff Order Section; 1616 P Street, N. W.; Washington, D. C. 20036.)

Uniform Freight Classification

(Copies of this publication can be obtained from the Railroad Freight Classification; Room 206, Union Station Building; 516 West Jackson Boulevard; Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries and are also distributed among technical groups and using federal agencies.)

3. REQUIREMENTS

3.1 Guide samples. Samples of the cap, if furnished (see 6.3), are solely for guidance and information.

3.2 Materials

3.2.1 Quilted material. The brim and the crown top shall be a quilted material composed of a layer of foam filler material quilted between two layers of fabric outer covering. The foam filler material shall be 1/16 inch thick and shall conform to type I, class 1 or 2 of L-P-386. The fabric outer covering shall conform to MIL-C-82282 except that the color shall be blue, conforming to USAF color shade No. 1589 (see 6.3). The quilting shall conform to stitch type 301 of FED-STD-751 and shall be 6 to 8 stitches per inch. The quilting shall be a diamond-shaped pattern that conforms to figure 1.

3.2.2 Binding. The binding shall conform to MIL-C-82282 except that the color shall be blue, conforming to USAF color shade No. 1589 (see 6.3).

3.2.3 Millinery belting ribbon. The material for the sweatband and for the adjustment loop shall be millinery belting ribbon conforming to table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

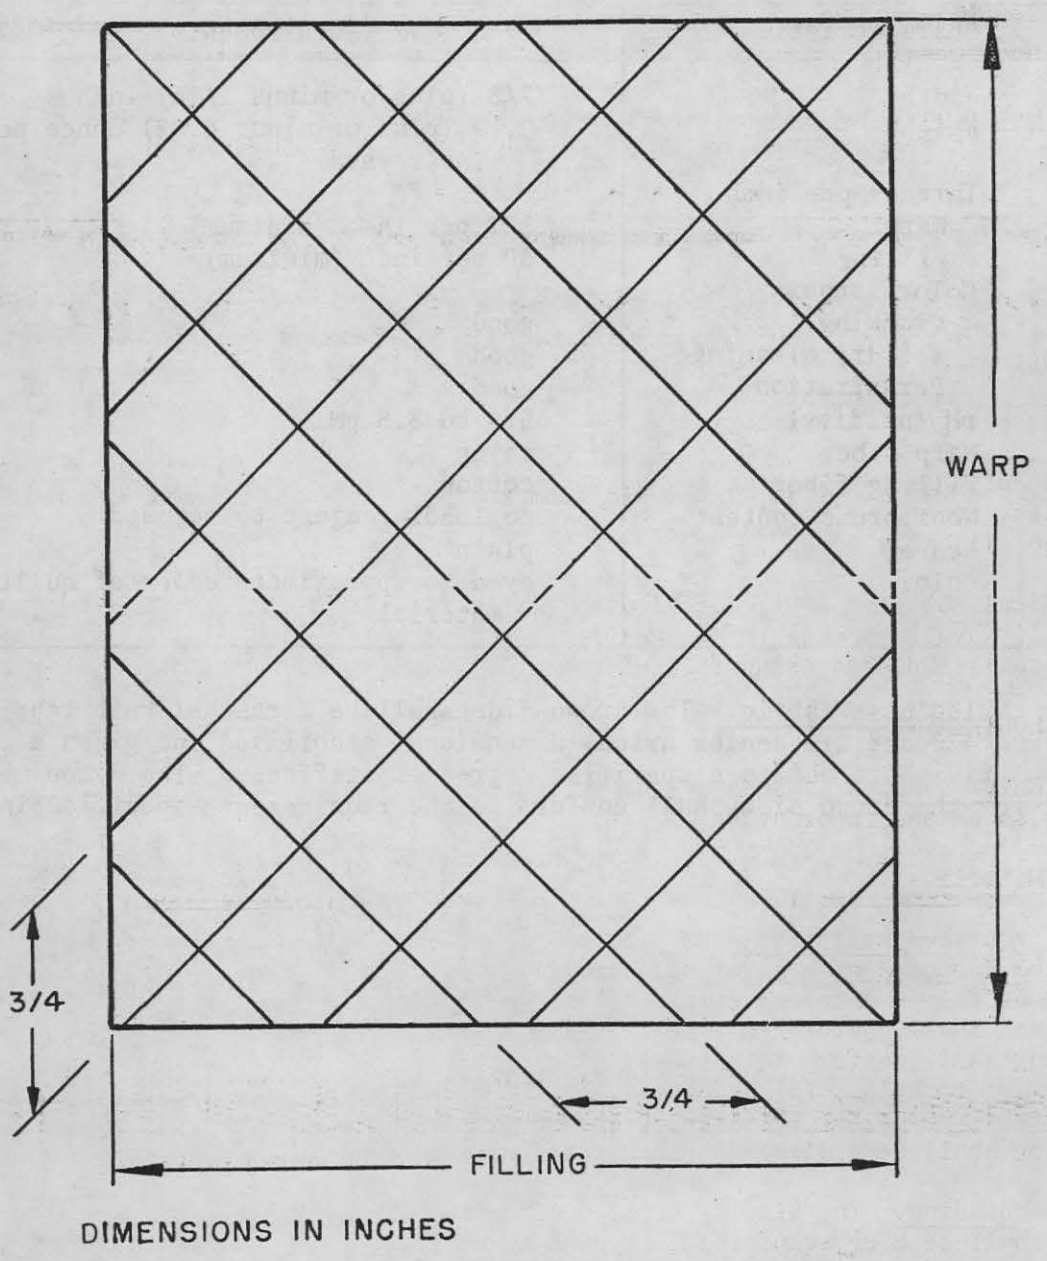


FIGURE 1. Diamond-Shaped Quilting Pattern

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE I. Millinery Belting Ribbon

Characteristics	Requirements
Width	7/8 (plus or minus 1/16) inch
Weight	0.19 (plus or minus 0.02) ounce per linear yard
Threads per inch	
Warp	122 per inch (minimum)
Filling	30 per inch (minimum)
Colorfastness	
Crocking	good
Wet dry cleaning	good
Perspiration	good
pH (acidity)	5.5 to 8.5 pH
Warp fiber	rayon
Filling fiber	cotton
Nonfibrous content	no loading agent to be used
Weave	plain
Color	dyed to approximate color of quilted material

3.2.4 Nylon mesh fabric. The crown side shall be a raschel knit fabric made from 420 and 210 denier nylon, dimensional stabilized and given a resinous finish to obtain a specified degree of stiffness. The nylon mesh fabric for the crown side shall conform to the requirements specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE II. Nylon Mesh Fabric

Characteristic	Requirements
Stitch	chain
Wales	13 per inch (minimum)
Courses	24 per inch (minimum)
Weight	4.9 ounces per square yard (minimum)
Pattern	open mesh (per inch) 13 by 12 4 ends 4 courses knit 1 course traverse guide bar 3 needles and knit 1 course knit 1 course traverse guide bar to original position and knit 1 course
Stiffness	13.0 by 10^{-4} inch-pounds (minimum) 17.0 by 10^{-4} inch-pounds (maximum)

3.2.5 Hat pin. The hat pin shall be steel wire (nickle plated) that is 0.230 to 0.235 inch in diameter and shall be 1-3/8 inches long. The hat pin shall have a 5/16-inch plastic (pearl finish) tear-drop head. A certificate of compliance will be acceptable for the requirements of the hat pin (see 4.2.1.1).

3.2.6 Snap fasteners. The snap fasteners shall conform to style 3 (pronged ring head type), 17 lines, finish 3 of MIL-F-10884.

3.2.7 Thread. Unless otherwise specified herein, the thread for quilting, seaming, and stitching shall conform to type I or II, class 1, sizes A and B of V-T-285. As an option to the size A thread of V-T-285, thread conforming to ticket No. 70, 2 ply of MIL-T-43548 may be used. As an option to the size B thread of V-T-285, thread conforming to ticket No. 50, 2 ply of MIL-T-43548 may be used. The thread for quilting, seaming, and stitching shall be dyed to match the material that is being sewn. The dyed thread shall have colorfastness to light, laundering, and perspiration equal to or better than the standard sample. If a standard sample is not available, the dyed thread shall have good colorfastness to light, laundering, and perspiration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

3.3 Design. The cap shall be a pill-box style with an unlined nylon mesh crown side, a quilted crown top and brim, a millinery belting ribbon sweatband, and snap fasteners on each side for securing the sides of the brim in the up position. The cap shall have a size adjustment at the center back and a hat pin to maintain the size.

3.4 Construction. The cap shall be constructed as specified in table III; however, the manufacturer will not be required to follow the exact sequence of operations as listed therein. Additional basting or holding stitching to facilitate the construction of the cap will be permissible, provided the thread used for the basting or holding stitching is removed or does not show on the finished cap.

3.4.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in table III shall conform to FED-STD-751. Where two or more seam or stitch types are given for the same operation, any one of them may be used. Seam allowances shall be maintained. Seams shall be sewn so that raw edges, run offs, twists, pleats, puckers, or open seams will not result. All seams shall start and finish evenly. Thread tension shall be maintained so that stitching will not be tight nor loose. The gage of the overedge stitching shall be 1/8 to 3/16 inch. The stitching shall not be through the printing on the label.

3.4.1.1 Stitches per inch. The stitches per inch specified in table III shall be interpreted to be the minimum and the maximum stitches per inch. The stitches per inch for zigzag stitching shall be determined by counting the needle penetrations.

3.4.1.2 Thread breaks and ends of seams. Ends of all seams and stitchings, if not caught in other seams, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching, except on the label, shall be overlapped not less than 1/2 inch. The ends of continuous stitching on the label shall be overlapped not less than three stitches. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks of stitch type 401 may be repaired by using stitch type 301.

3.4.2 Shade marking. The parts of the cap shall be marked or bundled to insure a uniform shade throughout the cap. Any method of marking may be used except metal fastening devices, sew-on tickets,aand adhesive-type tickets that will leave traces of paper or adhesive on the material after the tickets are removed.

3.4.3 Cutting. The parts of the cap shall be cut from the materials specified herein and in accordance with the pattern parts listed in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing Operations

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
1	Cut parts (a) Cut the parts of the cap in strict accordance with the patterns which show directional lines (warp) and notches for proper assembly of the parts. (b) Cut all parts made of the quilted material from one piece of material. (c) Cut the binding for the crown and outer edge of the brim on the bias and of sufficient width to comply with No. 4(a) and No. 5(c). (d) Cut the nylon mesh fabric with the heavy filling lines across the width of the crown side. (e) Cut the millinery belting ribbon for the sweatband 24-1/2 inches long. (f) Cut the millinery belting ribbon for the adjustment loop 5 inches long.					
2	Replace defective or damage parts (a) Replace at the time of cutting any part containing a hole, a smash, multiple floats, or a loose slub.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(b) Replace any part damaged by a needle chew, a cut, a tear, a hole, a friction burn, or an exposed drill hole during the manufacturing process. A darn or mend in a seam allowance will not be acceptable.					
3	Shade mark					
	(a) Mark, ticket, or bundle all parts to insure a uniform shade throughout the cap.					
4	Bind brim					
	(a) Bind the outer edge of the brim, continuing around the adjustment extension to the notch and tapering the binding to nothing at the notch. Both edges of the binding shall be turned under. The finished binding shall be 1/4 to 5/16 inch wide.	B	B	301	BSc-1	8-10
5	Make crown					
	(a) Join the crown side at the center back with a 1/4-inch seam; overedge the ends together. Fold the seam allowance to one side, and top stitch 1/16 inch from the folded edge.	B A B	B A B	301 503 or 505 301	LSq-2(a) SSa-1 LSq-2(b)	8-10 8-10
	(b) Stitch the crown side to the crown top with a 1/8-inch to 3/16-inch gage.	B B	B B	301 or 401	SSa-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(c) Bind the edges together. The width of the finished binding shall be 1/4 to 5/16 inch.	B	B	301	BSc-1	8-10
6	Assemble crown and brim					
	(a) Stitch the crown to the brim, leaving the brim adjustment extension (rounded ends) loose 1-1/2 inches on each side of the center back of the crown.	B	B	301	SSa-1	8-10
7	Attach sweatband and adjustment loop					
	(a) Lap the sweatband on the brim so that the outer edge is even with the crown and brim joining seam. Stitch 1/16 inch from the edge, catching the folded adjustment loop in the stitching at the center back. The finished adjustment loop (folded) shall be 1-3/4 inches long. The finished sweatband shall be 23-1/2 inches. Overlap the ends of the sweatband. Turn the upper end back under itself, and stitch 1/16 inch from the folded edge. The seam shall finish on the right side as worn.	B B	B B	301 301	LSa-1 LSb-1	8-10 8-10
	(b) Fold the sweatband to the inside of the cap. Place a second stitch 1/8 to 3/16 inch from the first stitch through the crown.	B	B	301	LSb-2	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
8	Attach label					
	(a) Stitch the bottom of the label to the loose edge of the sweatband, 1/16 to 1/8 inch from the edge, centered on the right side.	B	B	301	SSa-1	8-10
9	Attach snap fasteners (studs and eyelets)					
	(a) Secure one stud, on each side of the crown, located according to the marks on the pattern.					
	(b) Place one eyelet, on the side of the brim, located according to the marks on the pattern.					
10	Final assembly					
	(a) Close the snap fasteners. Put the tabs through the adjustment loop. Insert the hat pin in the adjustment loop.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE IV. Pattern Parts

Materials	Pattern Parts 1/	Parts Cut
Quilted material (see 3.2.1)	brim	1
	crown top	1
Nylon mesh fabric (see 3.2.4)	crown side	1

1/ Pattern parts will not be furnished for the sweatband and the back adjustment loop.

3.4.4 Patterns. Standard patterns will be furnished by the procuring activity (see 6.2). The standard patterns provide an allowance of 1/4 inch for all seams. The standard patterns shall be used for cutting the manufacturer's working patterns. The manufacturer's working patterns shall be identical to the standard patterns. The standard patterns and the manufacturer's working patterns shall not be altered in any way.

3.5 Finished measurements. The finished measurements of the cap shall conform to table V.

TABLE V. Finished Measurements

Location	Measurements in Inches 1/
Circumference	23-1/2
Crown top	
Center length (front to back)	6-1/4
Center width (side to side)	6
Crown sides (heights)	
Center front	3-3/4
Center back	3-1/8
Brim center front width	2-3/4

1/ The tolerance for the finished measurements shall be plus or minus 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

3.6 Label. Each cap shall have a combination identification and instruction label. The combination identification and instruction label shall conform to type I, classes 1 and 3 of DDD-L-20. The combination identification and instruction label shall have colorfastness to laundering in accordance with DDD-L-20. The label shall include the following information:

Cap, Woman's, Hot Weather
Manufacturer's Identification 1/
Contract No. 1/
Stock No. 1/
Universal size

LAUNDERING INSTRUCTIONS

Do not use hot water, strong soap, or detergent.
Hand wash in lukewarm water and air dry, or launder as a woolen item

1/ The manufacturer shall insert the applicable information.

3.7 Workmanship. The cap shall be manufactured in a thoroughly workmanlike manner.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection. Unless otherwise specified herein, inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Materials and components. Unless otherwise specified by the procuring activity (see 6.2), materials and components shall be examined and tested in accordance with the applicable documents referenced herein. In addition the materials and the components shall be tested as specified in table VI. The sample unit for the tests specified in table VI shall be 2-1/2 yards full width for the nylon mesh cloth and 2 to 20 linear yards for the millinery belting ribbon. The lot size for the tests specified in table VI shall be expressed in yards. The sample size for the tests specified in table VI shall be as specified in table VII. If one or more sample units fail to meet any requirement, the lot represented shall not be acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VI. Testing of Materials and Components

Characteristics	Test Methods
Millinery belting ribbon (see table I)	
Width	5020 of FED-STD-191
Weight	5041 of FED-STD-191
Threads per inch	5050 of FED-STD-191
Colorfastness	
Crocking	5651 of FED-STD-191
Wet dry cleaning	5622 of FED-STD-191
Perspiration	5680 of FED-STD-191
pH (acidity)	2811 of FED-STD-191
Warp fiber	1/
Filling fiber	1/
Nonfibrous content	1/
Weave	visual 2/
Color	visual 2/
Nylon mesh fabric (see 3.2.4 and table II)	
Chain stitch	visual 1/ 2/
Wales per inch	5070 of FED-STD-191
Courses per inch	5070 of FED-STD-191
Weight	5041 of FED-STD-191
Open mesh (per inch) 13 by 12 pattern	
4 ends	visual 1/ 2/
4 courses	visual 1/ 2/
Knit 1 course	visual 1/ 2/
Traverse guide bar 3 needles and knit 1 course	1/
Knit 1 course	1/
Traverse guide bar to original position and knit 1 course	1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VI. Testing of Materials and Components (Cont)

Characteristics	Test Methods
Stiffness	5206 of FED-STD-191

1/ A certificate of compliance will be acceptable for this requirement (see 4.2.1.1).
2/ One determination per sample shall be made.

TABLE VII. Sample Size

Lot Size	Sample Size
800 or less	2
801 to 22,000 inclusive	3
22,001 or more	5

4.2.1.1 Certificates of compliance. If a certificate of compliance is submitted for a requirement, the procuring activity will reserve the right to check test the item to determine the validity of the certification (see 3.2.5 and table VI).

4.2.2 End item. The end item shall be examined for defects as specified in 4.2.2.1 and 4.2.2.2. The sample unit for these examinations shall be one cap.

4.2.2.1 Visual examination. The end item shall be visually examined for the defects listed in tables VIII and IX. The inspection level for this visual examination shall be II of MIL-STD-105. The acceptable quality level for this visual examination shall be 4.0 defects per 100 units (dhu) for major defects, 10.0 dhu for major and minor A (combined) defects, and 15.0 dhu for major, minor A, and minor B (combined) defects.

4.2.2.2 Examination of finished measurements. The cap shall be examined for conformance to the finished measurements specified in table V. Each finished measurement of the cap not as specified shall be classified as a finished measurement defect. The inspection level for this examination of the finished measurements shall be S-3 of MIL-STD-105. The acceptable quality level for this examination of the finished measurements shall be 4.0 dhu for defects (one class).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. General Defects

Defect	Major	Minor A	Minor B
Material defects and workmanship damages			
Hole, cut, tear, needle chew, or friction burn	X		
Drill hole on outside of cap			X
Visible mend	X		
Weakening defect such as smash	X		
Weakening defect such as multiple floats or loose slub on outside of cap	X		
Weakening defect such as multiple floats or loose slub on inside of cap		X	
Permanent crease (caught in stitching) in cloth	X		
Unsightly slub or shade bar on outside of cap	X		
Unsightly slub or shade bar on inside of cap			X
Shaded parts			
Outside part shaded		X	
Cleanness			
Spot or stain on outside of cap, clearly noticeable		X	
Spot or stain on inside of cap, clearly noticeable			X
One or more marking tickets not removed			X
Any marking visible on outside of cap	X		
Thread ends not trimmed or loose threads not removed			X
Cutting			
Any part not cut in conformance to directional lines indicated on patterns or in accordance with requirements specified herein	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. General Defects (Cont)

Defect	Major	Minor A	Minor B
Component and assembly			
Any component or required operation omitted (unless otherwise classified herein)		X	
Any component not as specified	X		
Any operation not performed as specified herein (unless otherwise classified herein)			X
Seams and stitchings			
Seam or part twisted, puckered, or pleated (unless otherwise classified herein)		X	
Part of material caught, up to and including 1/4 inch of stitching, in unrelated operation or stitching		X	
Part of material caught, more than 1/4 inch of stitching, in unrelated operation or stitching	X		
Ends of stitching, if not caught in other seams or stitchings, backtacked less than 1/4 inch			X
Stitching overlapping end(s) of thread break less than 1/2 inch			X
Ends of continuous line of stitching overlapped less than three stitches on label or less than 1/2 inch on all other stitching			X
Gage of stitching or seam allowance irregular on major portion of seam, i.e., unevenly gaged or various stitchings not uniform	X		
Gage of stitching or seam allowance beyond range of width specified or varying more than 1/16 inch if range is not specified		X	
Stitches broken or missing (including overedging) up to and including 1/4 inch			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. General Defects (Cont)

Defect	Major	Minor A	Minor B
Stitches broken or missing (including overedging) more than 1/4 inch but not more than 1/2 inch		X	
Stitches broken or missing (including overedging) over 1/2 inch	X		
Skipped stitches or run off stitches 1/4 inch up to and including 1/2 inch long			X
Skipped stitches or run off stitches more than 1/2 inch long		X	
Raw edges more than 1/4 inch long			X
Seam and stitch type not as specified			X
Stitches per inch on major portion of seam less than minimum or more than maximum specified			X
Loose stitch tension resulting in loose seam	X		
Loose stitch tension (exposed loops in top or bottom thread) more than 1/2 inch long			X
Tight tension (stitches breaking when strain is applied in direction of seam or stitching)		X	
Label			
Label omitted, incorrect, or illegible	X		
Label not stitched to loose edge of sweatband			X
Label not positioned as specified			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE IX. Defects Applicable to Specific Parts

Defect	Major	Minor A	Minor B
Crown			
Crown puckered or pleated at joining to sweatband		X	
Sweatband			
Sweatband twisted, pleated, puckered, stretched, or tight	X		
Sweatband exposed 1/8 inch below cap for up to 3 inches			X
Sweatband exposed 1/8 inch below cap for over 3 inches		X	
Width of sweatband less than 11/16 inch or more than 13/16 inch		X	
Joining seam of sweatband more than 1/4 inch from center back crown seam			X
Sweatband spliced			X
Ends of sweatband not even at top or lower edge by 1/16 inch or more		X	
Snap fasteners			
Any part of snap fastener omitted, broken, or damaged; snap fastener noticeability misplaced; or sockets out of alignment with studs, seriously affecting serviceability	X		
Hat pin			
Hat pin omitted or rusty or point of hat pin blunt	X		
Brim			
Binding on brim twisted		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

4.2.3 Defects applicable to preparation for delivery. Shipping containers prepared for delivery shall be examined for the defects listed in table X to determine conformance to packaging, packing, and marking requirements. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of shipping containers in the inspection lot. The inspection level for this examination of preparation for delivery shall be S-2 of MIL-STD-105. The acceptable quality level for this examination of preparation for delivery shall be 4.0 dhu for defects (one class).

TABLE X. Examination of Preparation for Delivery

Examine	Defect
Marking (interior and exterior)	omitted; incorrect; illegible; or improper size, location, sequence, or method of application
Materials	any component missing, damaged, or not as specified
Workmanship	inadequate application of components such as incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
	bulged or distorted container
Content	number of interior packages more or less than required
	number of caps per interior package more or less than required 1/
	size on one or more caps not as specified on interior or outer container 1/

1/ One interior package from each container in the sample shall be examined for this defect.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each cap shall be packaged in a bag that is made of polyethylene that conforms to L-P-378. The bag containing the cap shall be placed in a snug-fitting box that conforms to type I of PPP-B-676.

5.1.2 Level C. Preservation and packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity for immediate use. This level may conform to the supplier's commercial practice provided the latter meets the requirements of this level.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Twelve caps shall be packed in a snug-fitting shipping container. The shipping container shall be constructed, closed, and reinforced to conform to type CF or SF, class weather resistant, style RSC of PPP-B-636.

5.2.2 Level B. Level B packing shall be the same as level A packing except that the shipping container shall be class domestic of PPP-B-636.

5.2.3 Level C. Caps packaged as specified shall be packed to afford adequate protection against damage during direct shipment from the supply source to the first receiving activity for immediate use at the lowest transportation rate for such supplies. The container shall be in accordance with the Uniform Freight Classification rules or National Motor Freight Classification rules, as applicable. This level may be the supplier's commercial practice provided the latter meets the requirements for this level.

5.3 Marking. In addition to any special marking required by the contract or order, the interior and the exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The cap covered by this specification is intended to be worn by female personnel of the Department of the Air Force.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Government furnished standard patterns (see 3.4.4)

(c) Requirements for testing materials and components (see 4.2.1)

(d) Selection of applicable levels of preservation and packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

6.3 Samples. Guide samples and color samples may be obtained from the procuring activity or as directed by the contracting officer. In the event of conflict between the guide samples and the text of this specification, the text of this specification shall govern.

6.4 Figure. Figure 2 shows the general design of the cap and is furnished for information only. In the event of conflict between figure 2 and the text of this specification, the text of this specification shall govern.


Custodian:
Air Force - 11

Reviewer:
Air Force - 82


Preparing activity:
Air Force - 11

Project No. 8410-F257


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

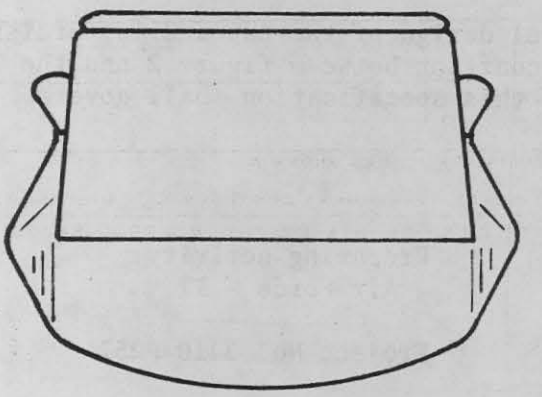

FRONT
VIEW

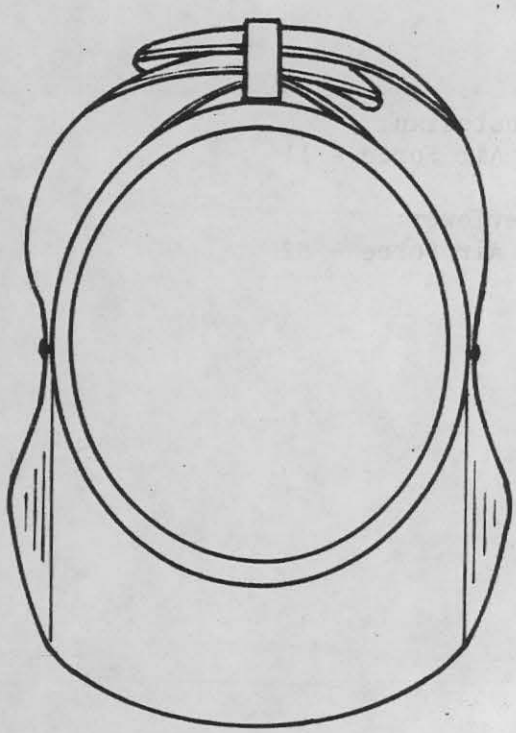

TOP
VIEW

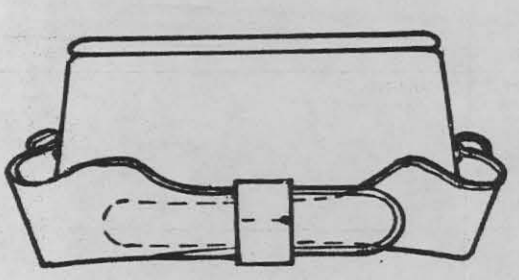

BACK
VIEW

FIGURE 2. Cap

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973 -713-160/657

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

FOLD

4950/TZS
Wright-Patterson AFB, O 45433
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S.MAIL

4950/TZS
Wright-Patterson AFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.