MILITARY SPECIFICATION

HEADSET-MICROPHONE, LIGHTWEIGHT, SUPRA-AURAL, GENERAL SPECIFICATION FOR

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1.1 SCOPE

1.1 Scope. This specification covers headsets intended for use in low ambient noise environments below 85 dBA SPL (sound pressure level). These headset assemblies use earphones that transform electrical energy into acoustical energy and use electret microphones to transform voice acoustical energy into electrical energy. The headset is a complete assembly including adjustable headband, earphone capsule with internal earphone, microphone internally mounted in an earphone capsule and externally mounted adjustable voice tube, microphone and earphone amplifier with earphone volume control, with cord, amplifier and connector configurations to meet the needs of various military activities. Power to the connector tips is required for headset operation.

1.2 Part number. The part number shall be in accordance with the applicable specification sheet.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

QQ-S-781	-	Strapping, Steel, and Seals.
PPP-B-601	-	Boxes, Wood, Cleated Plywood.
PPP-B-621	-	Box, Wood, Nailed and Lock-corner.
PPP-B-636	-	Box, Shipping, Fiberboard.

MILITARY

MIL-P-116	-	Preservation, Methods of.
MIL-F-14256	-	Flux, Soldering, Liquid (Rosin Base).
MIL-P-26514	-	Polyurethane Foam, Rigid or Flexible, For Packaging
MIL-H-83535/1	-	Headset-microphone, Lightweight, Supra-aural, Monaural.
MIL-H-83535/2	-	Headset-microphone, Lightweight, Supra-aural, Binaural.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressd to: 2750 ABW/ES, Gentile AF Station, Dayton, OH 45444-4500 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-147	-	Palletized Unit Loads.
MIL-STD-1285	-	Marking of Electrical and Electronic Parts.
MIL-STD-2073-1	-	DOD Material, Procedures for Development and Application of Packaging Requirements.
MIL-STD-45662	-	Calibration Systems Requirements.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

S3.7-1973 - Method for Coupler Calibration of Earphones.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, New York 10018)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern.

3.2 Qualification. The headset of headset-microphone assemblies furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for award of contract (see 4.5 and 6.3).

3.3 Materials.

3.3.1 Flux soldering, liquid (rosin base). The solder flux shall conform to type R of MIL-F-14256.

3.3.2 Polyurethane foam. Polyurethane foam for the ear cushion shall conform to MIL-P-26514.

3.4 Design and construction.

3.4.1 Headsets. The assemblies specified herein shall not cause dermatitis by reason of selection, processing, or fabrication of components. The headset shall be designed to be worn by all military personnel, including personnel wearing eyeglasses. The headset assembly shall be configured as specified (see 3.1). A typical configuration is shown on figure 1.

3.4.1.1 Weight. The maximum weight of the entire headset assembly shall be 8.5 ounces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

3.4.1.1.1 Headset weight. The maximum weight of the headset portion not including the cable, plug and amplifier assemblies shall be 1.6 ounces.

3.4.1.2 Headset adjustability. Unless otherwise specified (see 3.1), the headset shall be adjustable as shown on figure 2.

3.4.1.3 Headset color. Unless otherwise specified (see 3.1), the color of all exterior nonmetalic surfaces shall be black, except the voice tube (see figure 3, item 1) which is transparent.

3.4.1.4 Metals. The metals used shall be of the proper alloy and hardness necessary to provide the required strength and rigidity with the maximum strength to weight ratio. Metals shall be of a corrosion-resistant type.

3.4.2 Earphone with microphone capsule assembly. The earphone with microphone capsule assembly shall be as shown on figure 3.

3.4.2.1 Earphone and microphone element location. Both the earphone element and the microphone element shall be located in an earphone capsule (see figure 3). Voice signals shall be transmitted to the microphone element through fully adjustable tubulation (see figure 1).

3.4.2.2 Earphone and headband cushions. The cushions shall be as shown on figure 5. The cushions shall be easily replaceable and shall not be cemented to the assembly; however, they shall remain attached during normal usage.

3.4.2.3 Earphone capsule materials. The earphone capsule (see figure 3, items 7 and 8) shall be fabricated from ABS plastic or equivalent.

3.4.2.4 Microphone turret material. The microphone turret (see figure 3, item 6) shall be fabricated from acetal plastic or equivalent.

3.4.2.5 Microphone element. The microphone element shall be an electret condenser microphone.

3.4.3 Headband assembly. The headband assembly shall be as specified (see 3.1).


3.4.3.1 Headband slide adjustment. The headband slide adjustment shall be as shown on figure 5.

3.4.4 Cable assemblies. Unless otherwise specified (see 3.1), there shall be two cables provided with each headset assembly as shown on figure 6. The capsule cable assembly shall connect the earphone assembly with the amplifier assembly and incorporate an adjustable clothing clamp to secure the cable to the user's clothing. The connector cable shall connect the amplifier assembly with the connector assembly. The connector cable shall be of the retractile type, length as specified (see 3.1).

3.4.5 Connector assembly. Unless otherwise specified (see 3.1), the connector assembly shall be as shown on figure 7. The connector shall be a WECO 425 or equivalent configuration.

3.4.6 Amplifier assembly. Unless otherwise specified (see 3.1), the amplifier assembly shall be configured approximately as shown on figure 8. The amplifier assembly shall contain the microphone and earphone amplifiers, an earphone volume control switch (3-position or continuously adjustable), microphone push-to-talk switch, push-to-talk locking switch, a belt clip, and wrist loop.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.

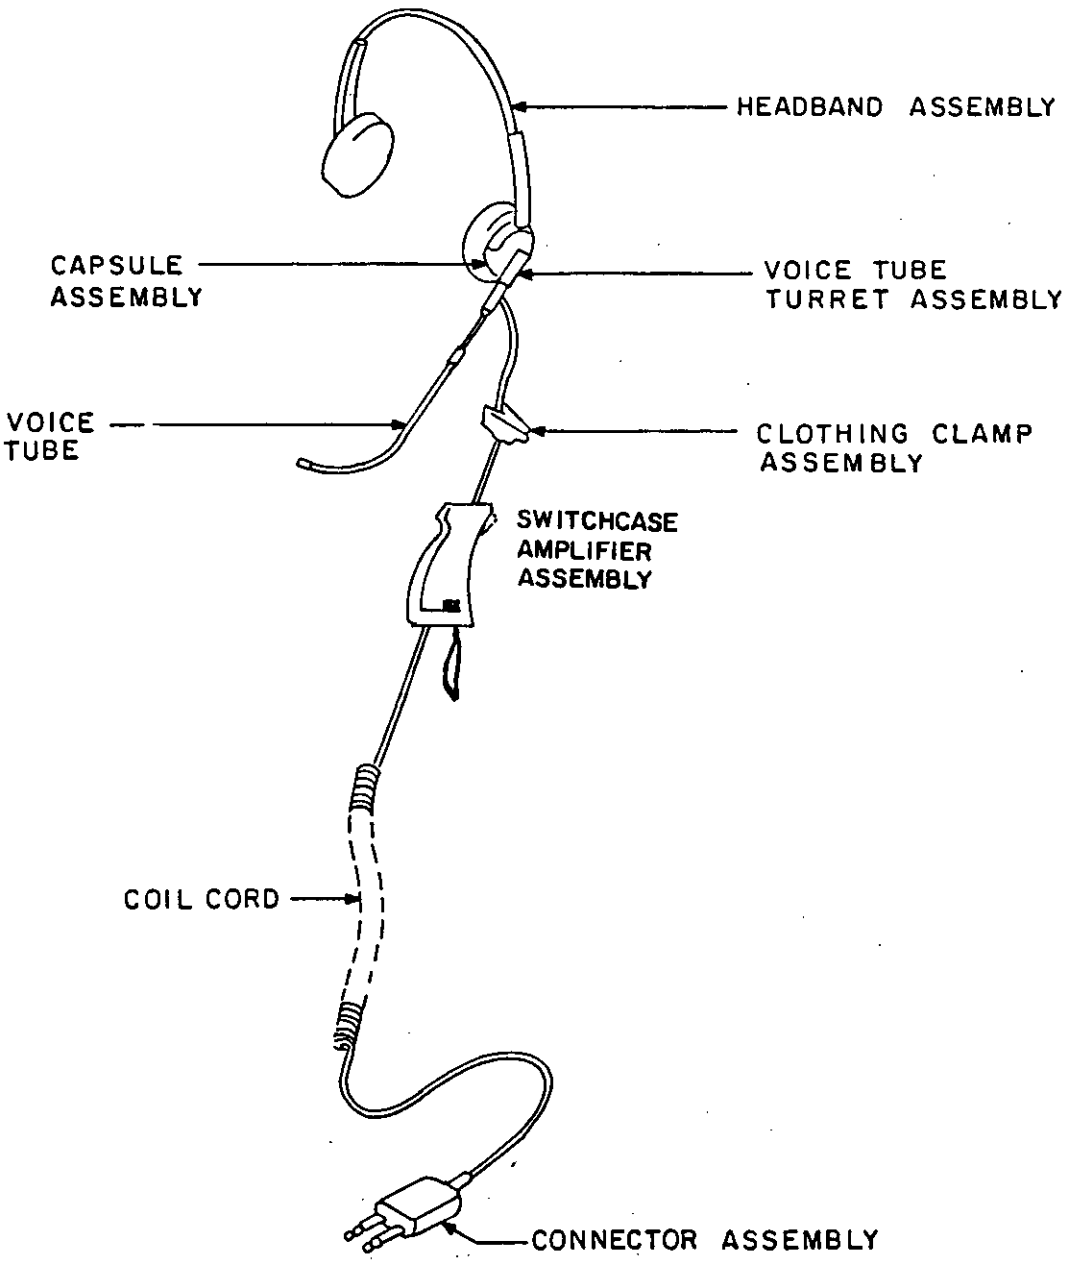

1. Typical headset assembly configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

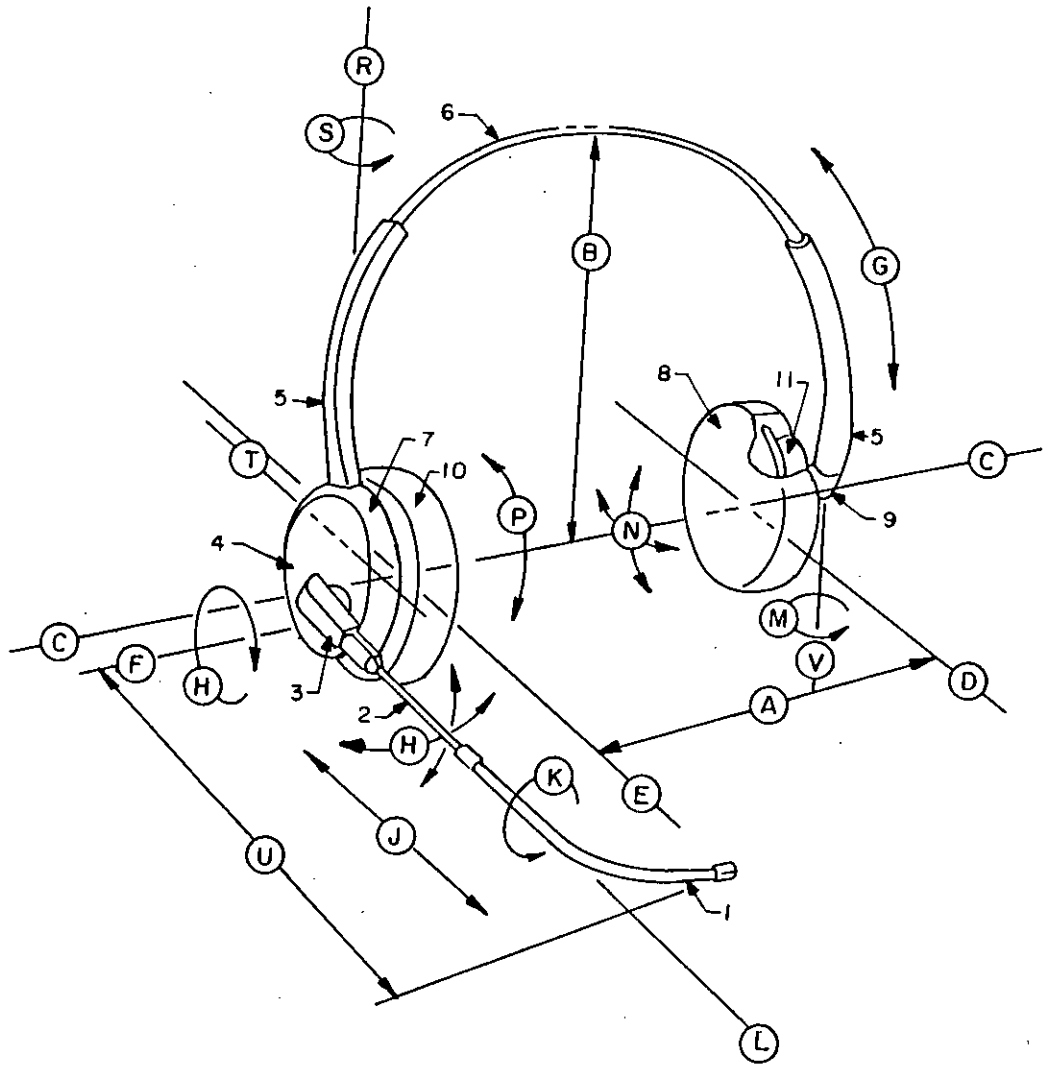


FIGURE 2. Headset adjustability.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.

NOTES:
1. The force required to maintain "A" dimensions of 5.5 inches between inside center of cushions (10, 8) shall be 3.0 ±1.0 ounces when one headband tube (5) is fully retracted and the other headband tube is fully extended.
2. The voice tube (1) shall rotate (K) 360° about the axis of the ball tube (2) and shall be slideably adjustable (J) with the ball tube (2) over a 2.0 inche range.
3. The ball tube (2) shall be swivelably adjustable (H) 0° to 25° about axis (L) through turret (3).
4. The turret (3) shall ratate 360° (H) about axis (F).
5. Angular deflection (P) of the earphone capsule (4) with the yoke (7) with respect to vertical axis (R) shall be ±5°.
6. The earphone capsule (4) and yoke (a) shall rotate freely (5) about axis (R) ±15° with respect to axis (C). In addition, the connection between the yoke (7) and the headband tube (5) shall allow rotation with friction of the earphone capsule (4) about the vertical axis (C) with positive detents at ±90°. Between ±165° and 180° the earphone capsule (4) shall rotate freely.
7. The dimension between axis (F) and the end of the voice tube (1) shall be 4.8 inches when adjustments are in neutral position.
8. The dimension (B) when dimension (A) is set to 5.0 inches can be slideably adjusted (G) between 4.2 and 6.2 inches.
9. Angular deflection (N) of the headpad (8, 11) shall be ±15° in all directions with respect to axis (C).
10. Angular deflection (N) of the headpad snap ball (9) about axis (V), with respect to axis (C), shall be frictional with positive detents at 0°, 90°, 180°, and 270°.
11. Adustment shall be maintained by friction by items 1 and 2, 2 and 3, 3 and 4, 5 and 6.

FIGURE 2. Headset adjustability - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.


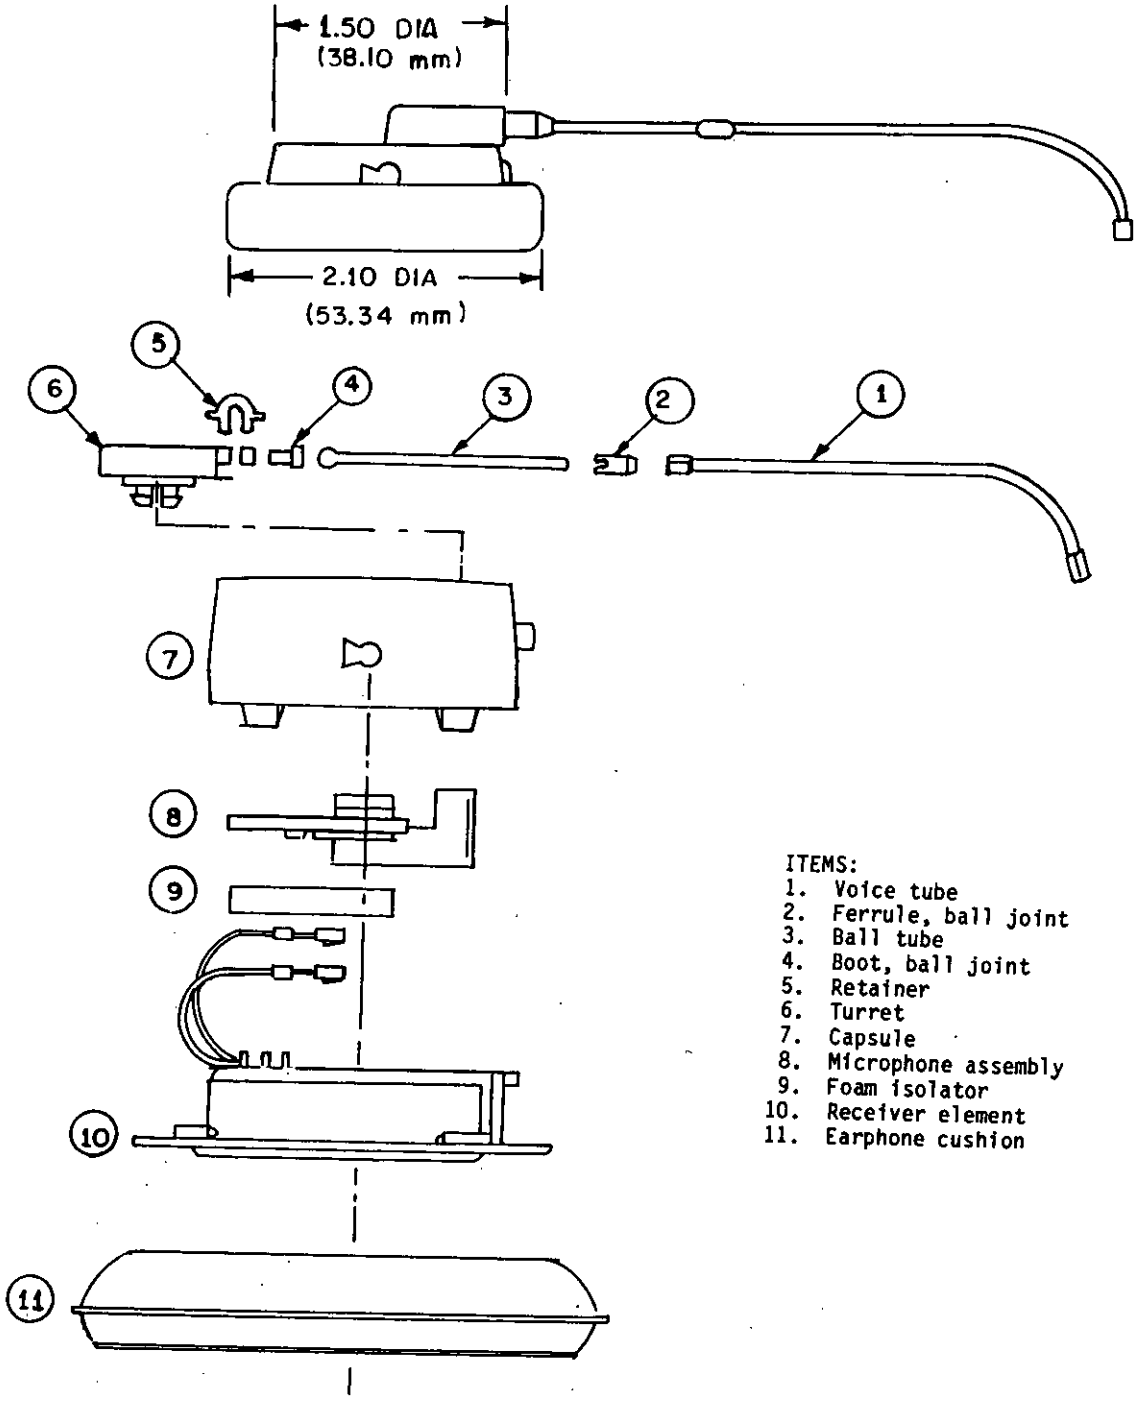


FIGURE 3. Earphone with microphone capsule typical assembly configuration.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the currentversion before use.

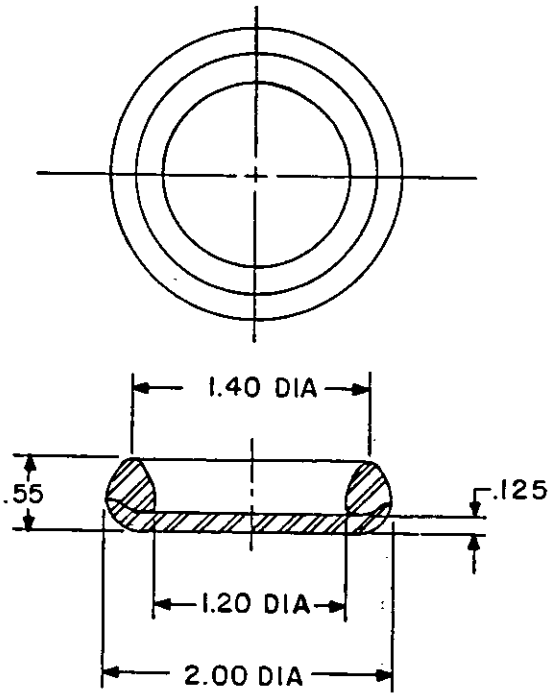


Inches	mm
.125	3.18
.55	14.0
1.20	30.5
1.40	35.6
2.00	50.8

Polyurethane, non-reticulated
Non-clickable foam
Density: 1.75 lbs pcf
Impression load depression: 40 lbs
Resilience: 35%
Tensile: 34 PSI
Elongation 200%
Tear strength: 4.5 lbs/in.
Color: Grey
Certification: Vendor to supply certification which will include hypo-allergenic data.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 4. Earphone cushion and headband cushion configuration.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

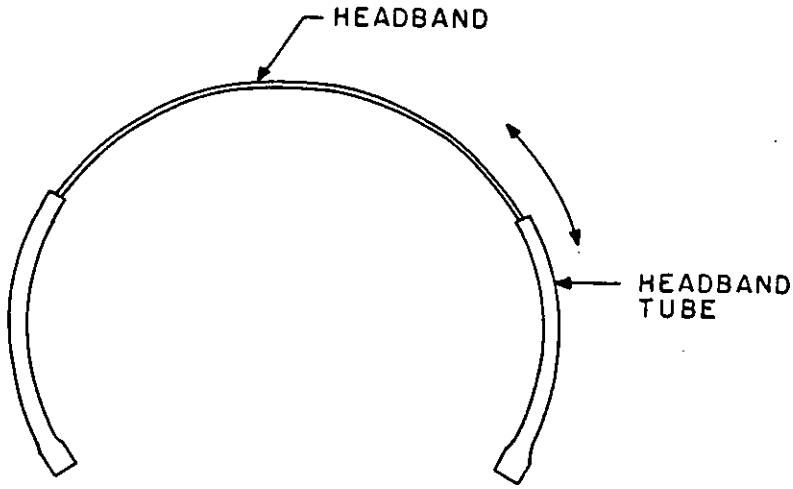


NOTE: Minimum force of 8 ounce, to slide headband with respect to headband tube in direction shown.

FIGURE 5. Headband assembly configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

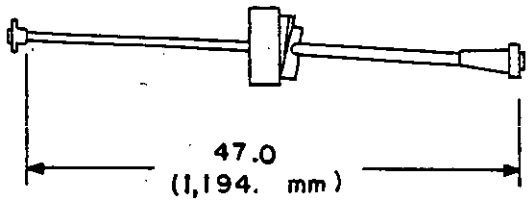

CAPSULE CABLE

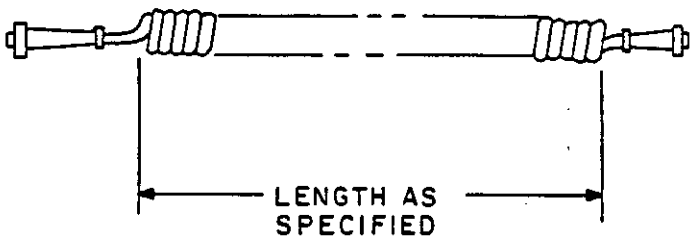



CONNECTOR CABLE

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 6. Cable assemblies.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:45Z
Check the source to verify that this is the currentversion before use.

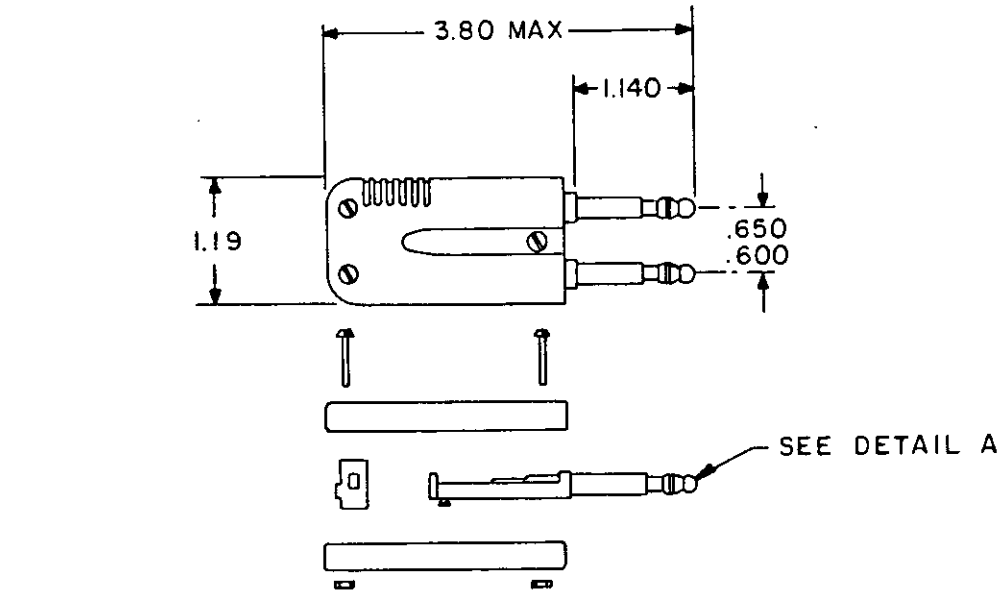

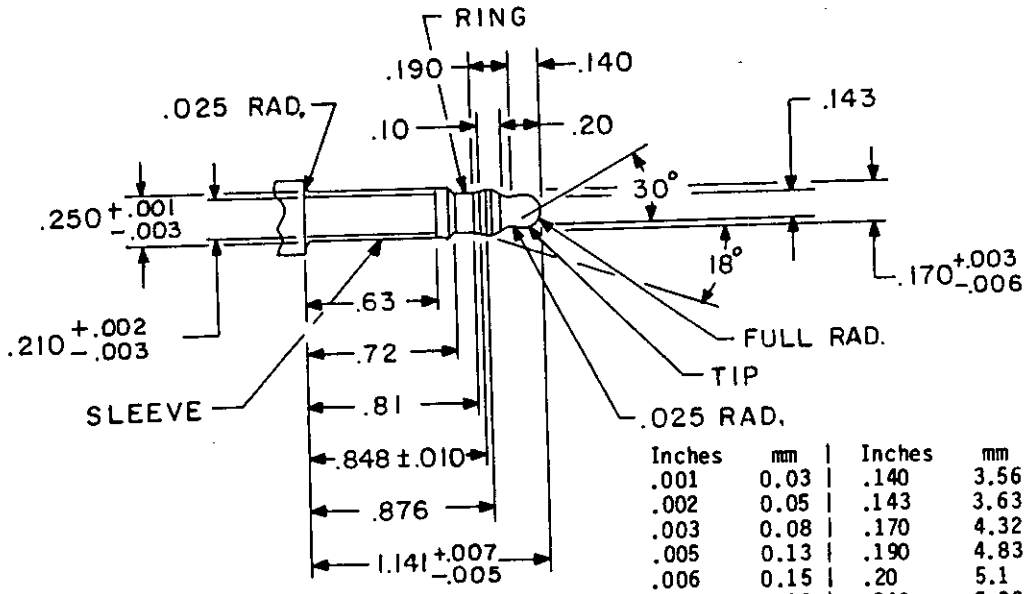


DETAIL A

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.140	3.56	.650	16.51
.002	0.05	.143	3.63	.72	18.3
.003	0.08	.170	4.32	.81	20.6
.005	0.13	.190	4.83	.848	21.54
.006	0.15	.20	5.1	.876	22.25
.007	0.18	.210	5.33	1.140	28.96
.010	0.25	.250	6.35	1.141	28.98
.025	0.64	.600	15.24	1.19	30.2
.10	2.5	.63	16.0	3.80	96.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 7. Connector assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.

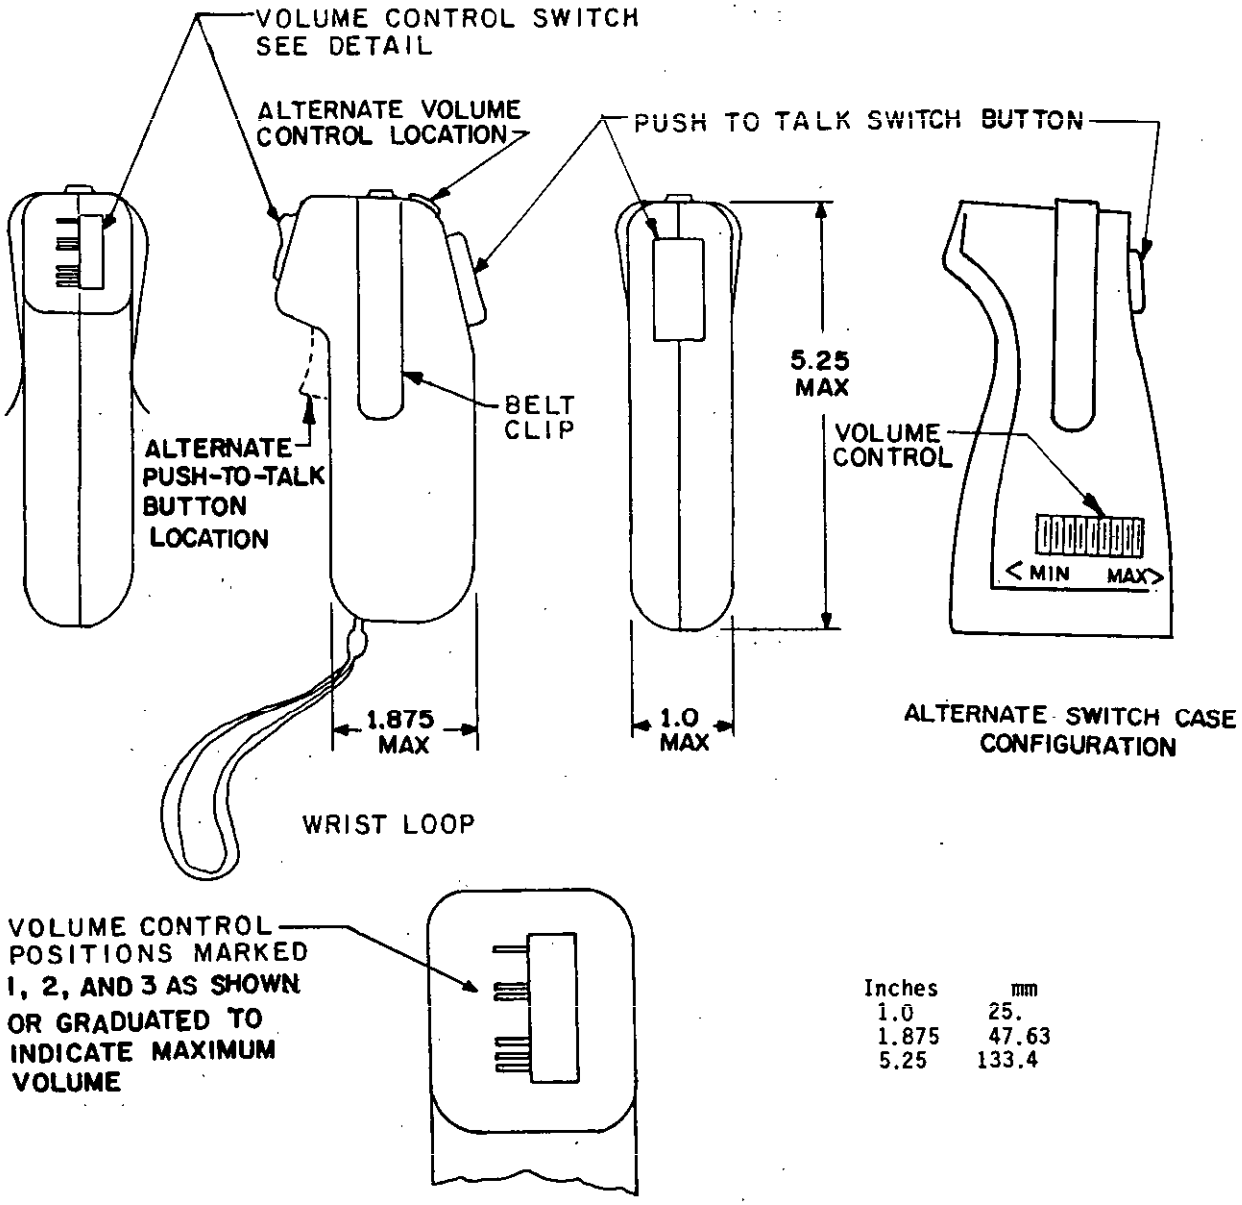

Inches	mm
1.0	25.
1.875	47.63
5.25	133.4

VOLUME CONTROL DETAIL

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Locations of volume control and push-to-talk buttons are left to the manufacturer's option.

FIGURE 8. Switch case amplifier assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.

3.4.6.1 Receiver circuit. The receiver amplifier circuit shall include receive limiting, a receiver amplifier with a volume control and receiver compression.

3.4.6.2 Transmit circuit. The transmit circuit shall include an amplifier, and voice switching and polarity circuitry. The transmit circuit shall include a push-to-talk switch as specified in 3.4.6.4.

3.4.6.3 Volume control switch. The volume control switch shall meet the following requirements: Be either a 3 position rocker switch or a continuously variable thumbwheel rotary potentiometer.

3.4.6.3.1 Life. The volume control shall operate a minimum of 100,000 cycles without failure in any of the 3 switch positions for rocker type volume controls and 25,000 cycles full range for potentiometer type volume controls.

3.4.6.3.2 Volume control operation. If the switch is a 3 position a rocker type, it shall operate as shown on figure 9.

3.4.6.4 Push-to-talk switch. The-push-to-talk switch shall meet the following requirements:

3.4.6.4.1 Life. The switch shall operate a minimum of 100,000 cycles without failure.

3.4.6.4.2 Actuator force. The force necessary, when exerted on the switch button (see figure 10), to activate the switch (fully depressed) shall be one to two pounds.

3.4.6.4.3 Contact/locking sequence. The switch shall provide operation (see figure 10) as follows:

a. Position 1: Switch not depressed, for monitoring telephone or radio.

b. Position 2: Switch depressed, for push-to-talk transmit operation.

c. Position 3: Switch depressed and locked, for locked-on transmit operation. The locking/non-locking push-to-talk option shall not be user selectable.

3.4.6.4.4 Switch contact gap. The gap between the switch contacts shall be between .015 inch and .035 inch when in the off position.

3.4.6.4.5 Switch button. The switch button shall be as shown on figure 11.

3.4.6.5 Locking switch. The locking switch shall control the locking/non-locking feature of the push-to-talk switch (see 3.4.6.4), and shall not be user accessible. This function shall be activated at the service/maintenance level only. When in the non-locking position, Position 3 of the push-to-talk switch (see figure 10) shall not be achievable.

3.4.6.6 Switch case. The switch case shall be contoured to allow comfort during extended periods of handheld use.

3.4.6.7 Wrist loop. The wrist loop shall be configured approximately as shown on figure 12.

3.4.6.8 Belt clip. A belt clip shall be provided (see figure 13).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.


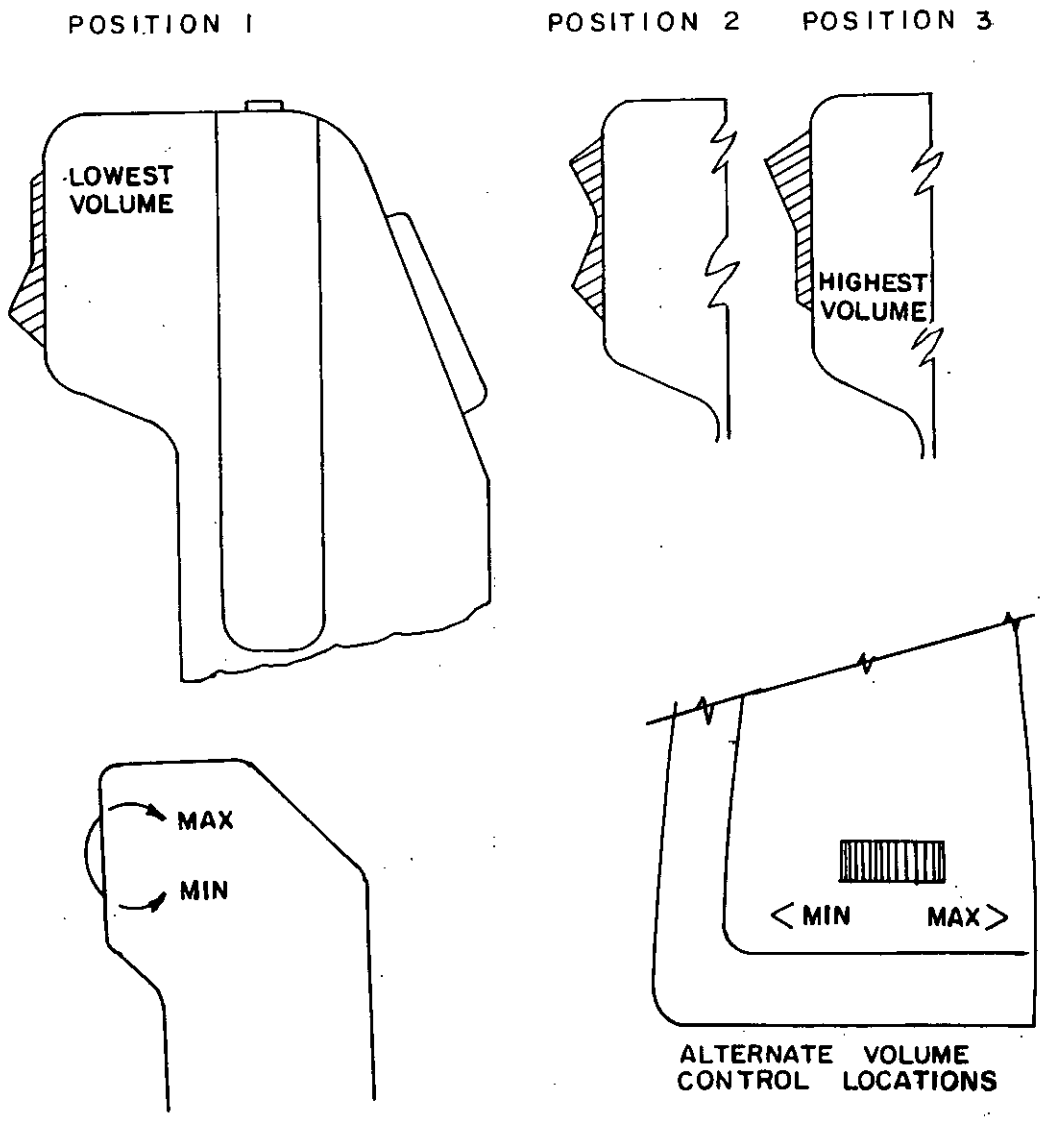


FIGURE 9. Volume control operation.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

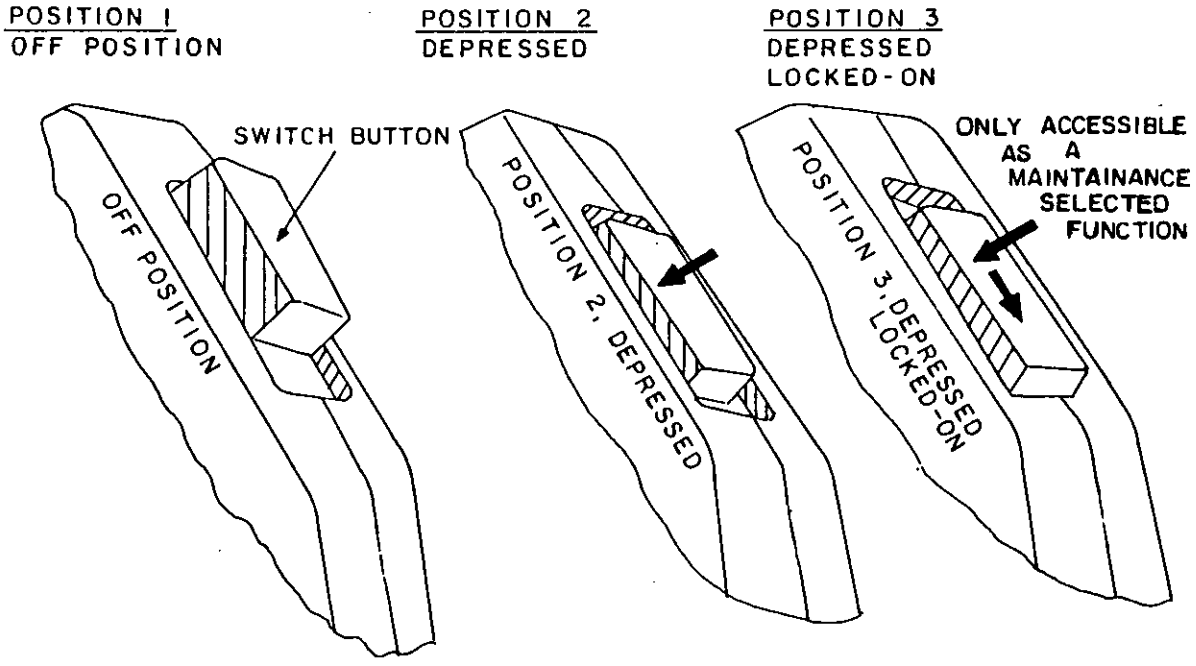

NOTE: To lock-on (position 3) the switch button shall be depressed and moved as indicated by arrows.

FIGURE 10. Push-to-talk switch operation.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

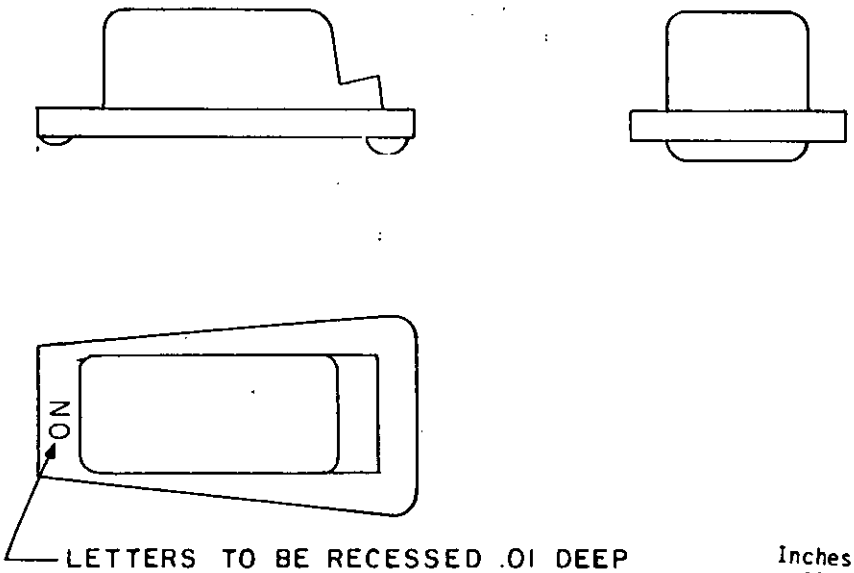


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 11. Switch button.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

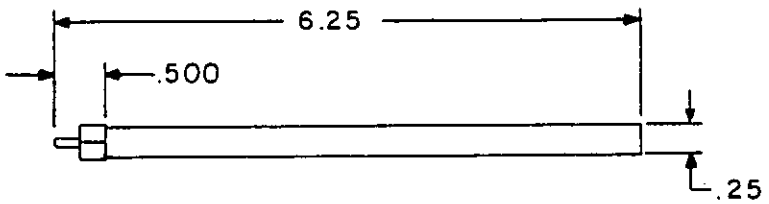

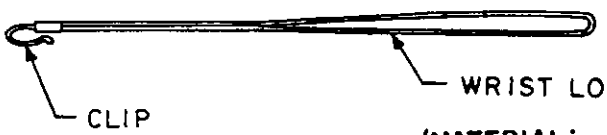


(MATERIAL: COTTON, ACRYLIC, OR COTTON-ACRYLIC BLEND)

Inches	mm
.25	6.4
.500	12.70
6.25	158.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 12. Wrist loop.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

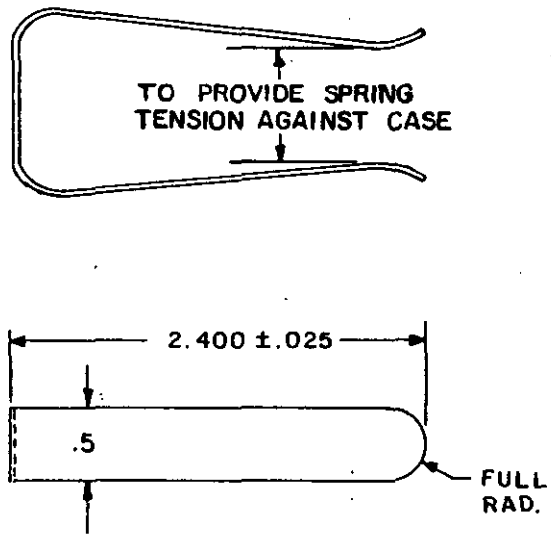

Inches	mm
.25	6.4
.5	13.
2.400	60.96

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Fabricate from 301 stainless steel full hard.
4. Finish: Bright polish.
5. Exterior of part to tbe free of tooling marks. Remove all burrs and sharp edges.

FIGURE 13. Belt clip.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.

3.5 Transmit performance characteristics. Transmit performance characteristics shall be measured under conditions specified in 4.7.2. The transmitter includes the microphone element and microphone amplifier. All transmit specifications shall apply for each polarity of transmitter dc current. The maximum difference in output level from positive to negative current operation shall be 1.5 dB.

3.5.1 Transmit output level. When tested as specified in 4.7.2, the 1000 Hz output level shall be -22 ±4 dBV. When tested with an electrically similar headset connected in parallel, the 100 Hz output level shall be within 9 dB of the value measured as a single headset.

3.5.2 Transmit loudness level (TXLL) (reference only). When tested as specified in 4.7.3, the loudness level shall be -21 ±4 dB. When tested with an electrically similar headset connected in parallel, the loudness level shall be within 9 dB of the value measured as a single headset.

3.5.3 Transmit frequency response. When tested as specified in 4.7.4, the frequency response shall fall within the envelope of figure 14. The response curve may float within the envelope and touch, but not cross, the limits of the envelope.

3.5.4 Voice switching (see 4.7.5).

3.5.4.1 Switch point. Voice switching shall occur between acoustic drive levels of 72.5 dB SPL and 82.5 dB SPL when tested as specified in 4.7.5.1.

3.5.4.2 Switch depth and time. The transmit level with acoustic drive level below switch point shall be 10 to 17 dB less than it is with the drive level above switch point when tested as specified in 4.7.5.2. The switch-up shall occur within 5 to 15 milliseconds. The switch-down shall occur within 150 to 300 milliseconds.

3.5.5 Warm-up time. When tested as specified in 4.7.6, the transmit output shall reach 71 percent of the steady-state value within 50 milliseconds of the time that 90 percent of steady-state power is received at the tips.

3.5.6 Distortion. When tested as specified in 4.7.7, total harmonic distortion shall be 5 percent or less.

3.5.7 DC resistance. When tested as specified in 4.7.8, the dc resistance (DCR) in ohms shall be 50 ohms or greater in test condition 1 and 40 ohms or greater in test condition 4.


3.5.8 Output impedance. When tested as specified in 4.7.9, the output impedance shall 50 ohms ±20 ohms at all current levels.

3.5.9 Transmit noise. When tested as specified in 4.7.10, the average noise level shall be 10 dBrnC or less.

3.6 Receiver performance characteristics. The receiver performance shall be the performance of the combination of the earphone element and receiver amplifier electronics. Receiver performance characteristics shall be measured under the condition specified in 4.7.11. All receiver specifications shall apply for each polarity of transmitter dc current. The maximum difference in output level from positive to negative current operation shall be 1.5 dB.

3.6.1 Receiver output level at 1,000 Hz. When tested as specified in 4.7.11, the 1,000 Hz output level for monaural headsets shall be 84.0 ±5 dB SPL. When a headset with volume control is specified (see 3.1), volume control position 1 shall be used. When binaural headsets are specified (see 3.1), the output level shall be 82 ±5 dB SPL.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:45Z
Check the source to verify that this is the currentversion before use.

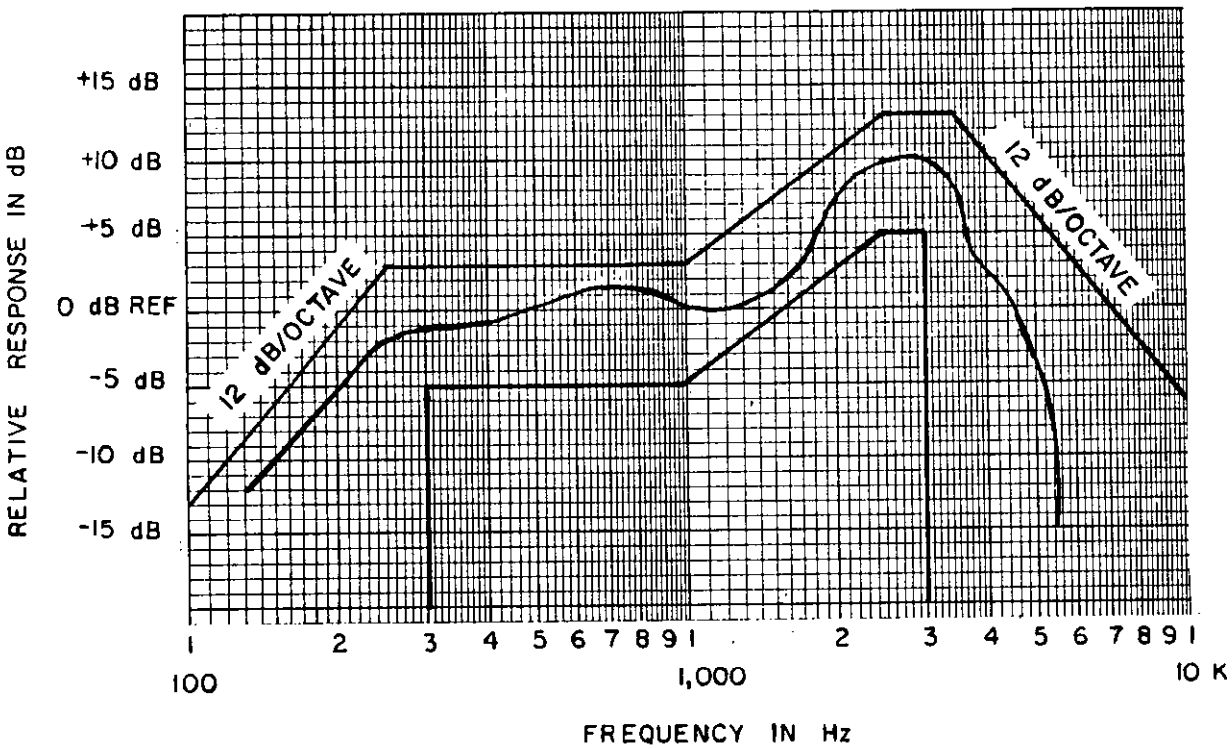

NOTE: The response curve shown is typical and may "float" within the template limits.

FIGURE 14. Transmit response template.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

3.6.2 Receiver loudness level (RXLL). When tested as specified in 4.7.12, the receiver loudness level for monaural headsets shall be 84 dB ±5 dB RXLL. When a headset with volume control is specified (see 3.1), volume control position 1 shall be used. When binaural headset are specified (see 3.1), the loudness level shall be 81.5 ±5 dB RXLL.

3.6.3 Receiver volume control. When a headset with volume control is specified (see 3.1), the receiver volume control gain shall be as follows when tested as specified in 4.7.13:

Lowest Level: Loudness level measurement of 3.6.2 or output level measurment of 3.6.1.
Position II of rocker type switch: Lowest level +5 ± 1 dB.
Highest level: lowest level +15 ± 5 dB.

3.6.4 Compression level. When a headset with volume control is specified (see 3.1), the receiver compression level shall be 99 dB ±4, when tested as specified in 4.7.14.

3.6.5 Receiver frequency response. When tested as specified in 4.7.15, the receiver frequency response of the headset shall fall within the template of figure 15 if a monaural headset is specified (see 3.1) or figure 16 if a binaural headset is specified (see 3.1).

3.6.6 Acoustic limiting. When tested as specified in 4.7.16, the frequency response shall fall on or below the template limits on figure 17.

3.6.7 Receiver linearity. When tested as specified in 4.7.17, the receiver output shall remain within the template limits of figure 18.

3.6.8 Common mode rejection. When tested as specified in 4.7.18, the receiver output level shall be at least 40 dB SPL below the level specified in 3.6.4.

3.6.9 Receiver distortion. When tested as specified in 4.7.19, the total harmonic distortion shall be 5 percent or less.

3.6.10 Transition times.

3.6.10.1 AGC attack time. When tested as specified in 4.7.20.1, the AGC shall act to decrease the output to 120 percent of final level in 5 to 15 milliseconds.

3.6.10.2 AGC release time. When tested as specified in 4.7.20.2, The AGC shall allow the output to rise to 80 percent of final level in 75 to 175 milliseconds.

3.6.10.3 Power-up time. The receiver output shall reach 80% of its final value within 200 milliseconds of the time that power is applied.

3.6.10.4 Power-down time (Dual tone multiple frequency detection). When power is removed, the receive output shall remain withn 6 dB of its original level for at least 100 milliseconds.


3.6.11 Input impedance. When tested as specified in 4.7.21, the receiver impedance shall be as specified (see 3.1).

3.7 Reverse sidetone. When tested as specified in 4.7.22, the transmitter output shall not exceed -46 dBV.

3.8 Insulation breakdown. The headset shall continue to meet specifications after application of a 1,000 V rms signal as specified in 4.7.23.

3.9 Strain relief. When tested as specified in 4.7.24, there shall be no slippage of the cord or cable assembly out of the plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

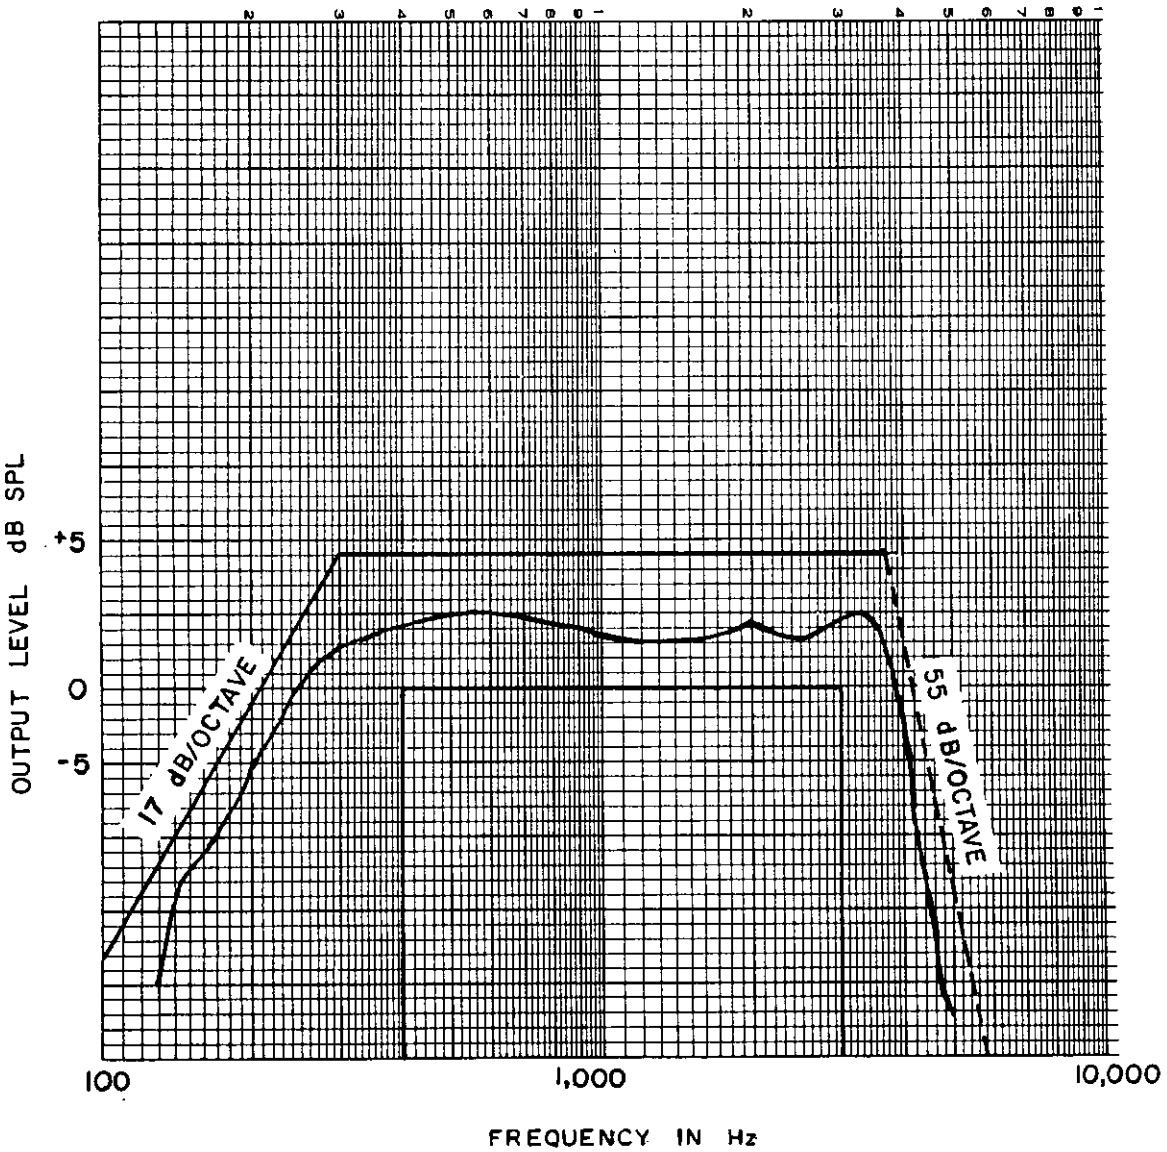

NOTE: The response curve shown is typical and may "float" within the template limits.

FIGURE 15. Receive response template, monaural headsets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

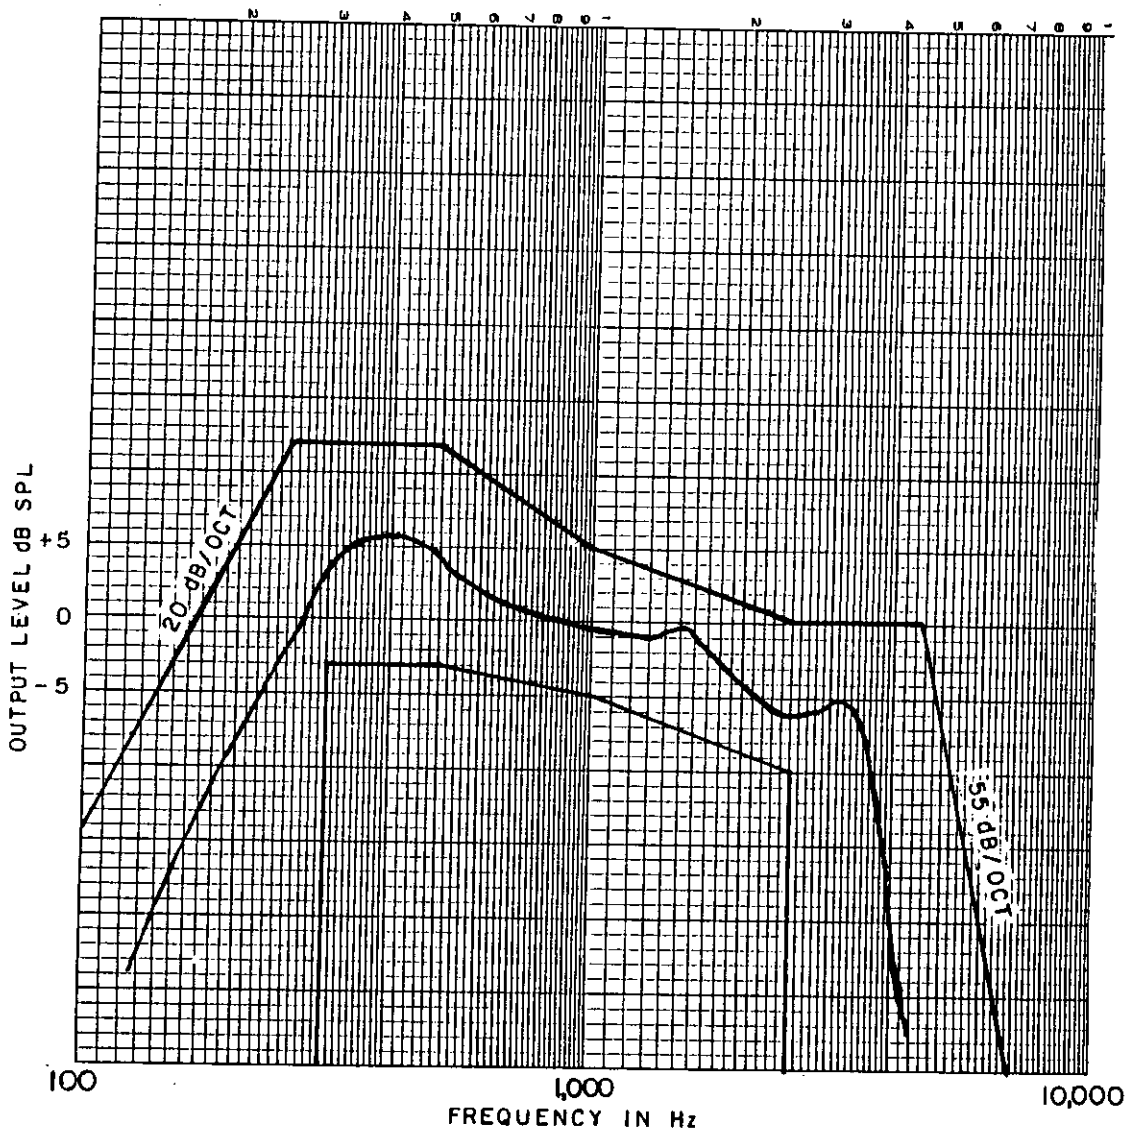


FIGURE 16. Receive response template, binaural headsets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

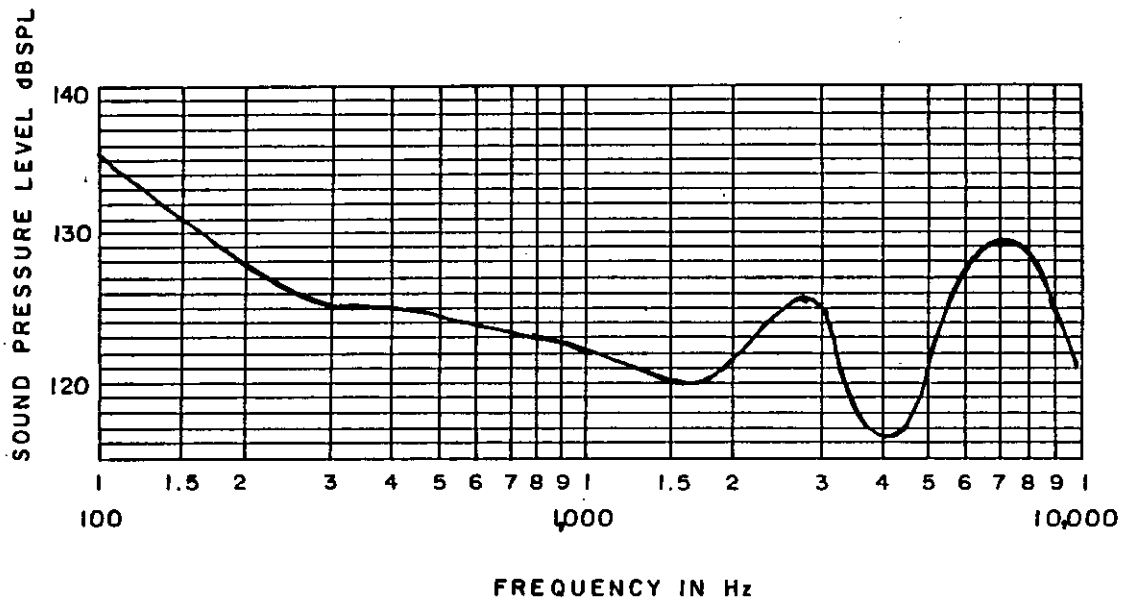


FIGURE 17. Frequency in Hz maximum acoustic output.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

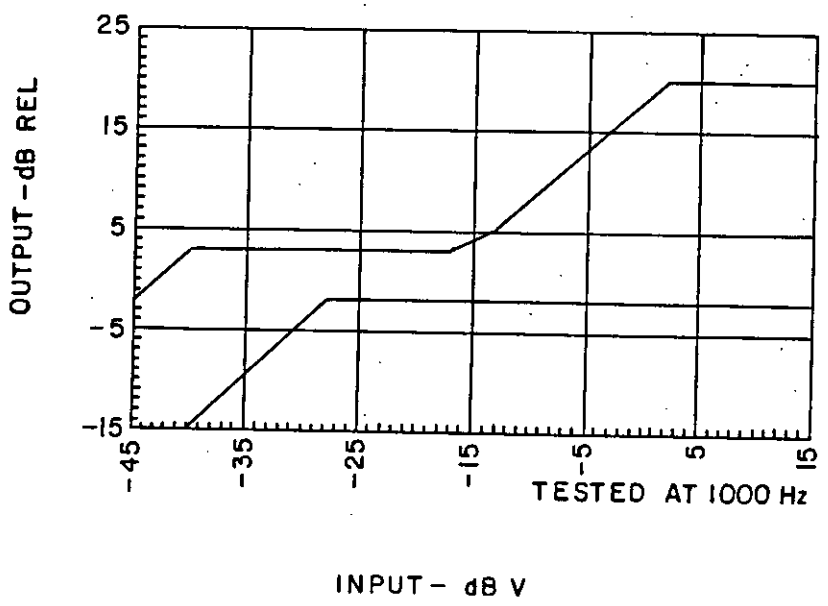


FIGURE 18. Receiver input/output template.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the currentversion before use.

3.10 Static immunity. The headset shall continue to meet specifications after repeated static discharges when tested as specified in 4.7.25.

3.11 Environmental

3.11.1 Temperature, humidity and pressure. When tested in accordance with 4.7.26.1, the transmit and receive output levels shall not deviate by more than ±3 dB from their original levels and the response curves shall remain in their appropriate response envelopes.

3.11.2 Shock. When tested in accordance with 4.7.26.2, the transmit and receive output levels shall not deviate by more than ±3 dB from their original levels and the response curves shall remain in their appropriate response envelopes.

3.11.3 Vibration. When tested in accordance with 4.7.26.3, the transmit and receive output levels shall not deviate by more than ±3 dB from their original levels and the response curves shall remain in their appropriate response envelopes.

3.12 Cable flexing. When tested as specified in 4.7.27, the headset cable shall withstand 50,000 flexes while maintaining electrical integrity

3.13 Marking. Headsets and headset-microphones shall be marked in accordance with MIL-STD-1285 with the part number and manufacturer's code symbol or name.

3.14 Workmanship. Headsets shall be processed in such a manner as to be uniform in quality and shall be free from loose or deposited foreign materials, and other defects that will affect life, serviceability, or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Test equipment and inspection facilities. Test and measuring equipment and inspection facilities of sufficient accuracy, quality and quantity to permit performance of the required inspection shall be established and maintained by the contractor. The establishment and maintenance of a calibration system to control the accuracy of the measuring and test equipment shall be in accordance with MIL-STD-45662.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspections specified herein are classified as follows:

a. Materials inspection (see 4.3).
b. Qualification inspection (see 4.5).
c. Quality conformance inspection (see 4.6).

4.3 Materials inspection. Materials inspection shall consist of certification supported by verifying data that the materials listed in table I, used in fabricating the equipment, are in accordance with the applicable referenced specification prior to such fabrication.

TABLE I. Materials inspection.

Material	Requirement paragraph	Applicable specification
Solder flux	3.3.1	MIL-F-14256
Polyurethane foam	3.3.2	MIL-P-26514

4.4 Inspection conditions. Unless otherwise specified, all inspections shall be performed under the following conditions:

Temperature - Room ambient, +19°C (+67°F) to +25°C (+77°F).
Pressure - Normal atmospheric.
Humidity - 45% to 50% relative humidity.

All acoustical testing shall be made in a free field environment.

4.5 Qualification inspection. Qualification inspection shall be performed at a laboratory acceptable to the Government (see 6.3) on sample units produced with equipment and procedures normally used in production.

4.5.1 Sample size. Six earphones, microphones, headsets and headset-microphones shall be subjected to the qualification inspection.

4.5.2 Inspection routine. The sample shall be subjected to the inspections specified in table II, in the order shown. All sample units shall be subjected to the inspection of group I. The sample shall then be divided equally into two groups of three units each, and subjected to the inspections for their particular group.

4.5.3 Failures. One or more failures shall be cause for refusal to grant qualification approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification inspection.

Inspection	Requirement paragraph	Test method paragraph
Group I		
Visual and mechanical	3.1, 3.3, 3.4, 3.13 and 3.14	4.7.1
Transmit performance characteristics:		
Transmit output level at 1,000 Hz	3.5.1	4.7.2
Transmit loudness level	3.5.2	4.7.3
Transmit frequency response	3.5.3	4.7.4
Voice switching:	3.5.4	4.7.5
Switch point	3.5.4.1	4.7.5.1
Switch depth	3.5.4.2	4.7.5.2
Warm-up time	3.5.5	4.7.6
Distortion	3.5.6	4.7.7
DC resistance	3.5.7	4.7.8
Output impedance	3.5.8	4.7.9
Transmit noise	3.5.9	4.7.10
Receiver performance characteristics:		
Receiver output level at 1,000 Hz	3.6.1	4.7.11
Receiver loudness level	3.6.2	4.7.12
Receiver volume control	3.6.3	4.7.13
Compression level	3.6.4	4.7.14
Receiver frequency response	3.6.5	4.7.15
Acoustic limiting	3.6.6	4.7.16
Receiver linearity	3.6.7	4.7.17
Common mode rejection	3.6.8	4.7.18
Receiver distortion	3.6.9	4.7.19
Transition times:	3.6.10	4.7.20
AGC attack time	3.6.10.1	4.7.20.1
AGC release time	3.6.10.2	4.7.20.2
Power-up time	3.6.10.3	4.7.20.3
Power-down time	3.6.10.4	4.7.20.4
Input impedance	3.6.11	4.7.21
Group II		
Reverse sidetone	3.7	4.7.22
Insulation breakdown	3.8	4.7.23
Strain relief	3.9	4.7.24
Static immunity	3.10	4.7.25
Group III		
Environmental:	3.11	4.7.26
Temperature, humidity and pressure	3.11.1	4.7.26.1
Shock	3.11.2	4.7.26.2
Vibration	3.11.3	4.7.26.3
Cable flexing	3.12	4.7.27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

4.5.4 Retention of qualification. To retain qualification, the contractor shall forward a report at 12-month intervals to the qualifying activity. The qualifying activity shall establish the initial reporting date. The report shall consist of:

a. A summary of the results of the tests performed for inspeciton of product for delivery, groups A and B, indicating as a minimum the number of lots that have passed and the number that have failed. The results of tests of all reworked lots shall be identified and accounted for.

b. A summary of the results of test performed for periodic inspection, group C, including the number and mode of failures. The summary shall include results of all periodic inspection tests performed and completed during the 12-month period. If the summary of the test results indicates nonconformance with specification requirements, and corrective action acceptable to the qualifying activity has not been taken, action may be taken to remove the failing product from the qualified products list.

Failure to submit the report within 30 days after the end of each 12-month period may result in loss of qualificaion for the product. In addition to the periodic submission of inspection data, the contractor shall immediately notify the qualifying activity at any time during the 12-month period that the inspection data indicates failure of the qualified product to meet the requirements of this specification.

In the event that no production occurred during the reporting period, a report shall be submitted certifying that the company still has the capabilities and facilities necessary to produce the item. If during two consecutive reporting periods there has been no production, the manufacturer may be required, at the discretion of the qualifying activity, to submit the headsets to testing in accordance with qualificaton inspection requirements.

4.6 Quality conformance inspection.

4.6.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A and B.

4.6.1.1 Inspection lot. An inspection lot shall consist of all headset-microphone assemblies of the same type produced under essentially the same conditions, and offered for inspection at one time.

4.6.1.2 Group A inspection. Group A inspection shall consist of the inspections specified in table III.

4.6.1.2.1 Sampling plan. Statistical sampling and inspection shall be in accordance with MIL-STD-105 for general inspection level II. The acceptable quality level (AQL) shall be 1 percent major and 4 percent minor. Major and minor defects shall be as defined in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

TABLE III. Group A Inspection.

Inspection	Requirement paragraph	Test method paragraph
Visual and mechanical	3.1, 3.3, 3.4, 3.13 and 3.14	4.7.1
Transmit performance characteristics:		
Transmit output level at 1,000 Hz	3.5.1	4.7.2
Transmit loudness level	3.5.2	4.7.3
Transmit frequency response	3.5.3	4.7.4
Distortion	3.5.6	4.7.7
DC resistance	3.5.7	4.7.8
Output impedance	3.5.8	4.7.9
Receiver performance characteristics:		
Receiver output level at 1,000 Hz	3.6.1	4.7.11
Receiver loudness level	3.6.2	4.7.12
Receiver volume control	3.6.3	4.7.13
Compression level	3.6.4	4.7.14
Receiver frequency response	3.6.5	4.7.15
Receiver distortion	3.6.9	4.7.19
Input impedance	3.6.11	4.7.21

4.6.1.2.2 Rejected lots. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for reinspection. Resubmitted lots shall be clearly identified as reinspected lots.

4.6.1.3 Group B inspection. Group B inspection shall consist of the inspections specified in table IV and shall be made on sample units which have been subjected to and have passed the group A inspection.

4.6.1.3.1 Sampling plan. The sampling plan shall be in accordance with MIL-STD-105 for special inspection level S-4. The sample size shall be based on the inspection lot size from which the sample was selected for group A inspection. The AQL shall be 2.5 percent defective.

Table IV. Group B inspection.

Inspection	Requirement paragraph	Test method paragraph
Transmit performance characteristics:		
Voice switching:	3.5.4	4.7.5
Switch point	3.5.4.1	4.7.5.1
Switch depth	3.5.4.2	4.7.5.2
Warm-up time	3.5.5	4.7.6
Transmit noise	3.5.9	4.7.10
Receiver performance characteristics:		
Acoustic limiting	3.6.6	4.7.16
Receiver linearity	3.6.7	4.7.17
Common mode rejection	3.6.8	4.7.18
Transition times:	3.6.10	4.7.20
AGC attack time	3.6.10.1	4.7.20.1
AGC release time	3.6.10.2	4.7.20.2
Power-up time	3.6.10.3	4.7.20.3
Power-down time	3.6.10.4	4.7.20.4
Reverse sidetone	3.7	4.7.22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

4.6.1.3.2 Rejected lots. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for reinspection. Resubmitted lots shall be inspected using tightened inspection. Such lots shall be separate from new lots, and shall be clearly identified as reinspected lots.

4.6.1.3.3 Disposition of sample units. Sample units which have passed the group B inspection may be delivered on the contract or purchase order, if the lot is accepted and the sample units are still within specified electrical tolerances.

4.6.2 Periodic inspection. Periodic inspection shall consist of group C inspection. Except where the results of these inspections show noncompliance with the applicable requirements (see 4.6.2.1.4), delivery of products which have passed groups A and B inspections shall not be delayed pending the results of these periodic inspections.

4.6.2.1 Group C inspection. Group C inspection shall consist of the inspections specified in table V, in the order shown. Group C inspection shall be made on inspection lots which have passed the groups A and B inspections.

TABLE V. Group C inspection.

Inspection	Requirement paragraph	Test method paragraph
Insulation breakdown	3.8	4.7.23
Strain relief	3.9	4.7.24
Static immunity	3.10	4.7.25
Environmental:	3.11	4.7.26
Temperature, humidity and pressure	3.11.1	4.7.26.1
Shock	3.11.2	4.7.26.2
Vibration	3.11.3	4.7.26.3
Cable flexing	3.12	4.7.27


4.6.2.1.1 Sampling plan. Four sample units shall be selected from each 2-months production or each 1,000 units, whichever occurs first, after date of notification of qualification.

4.6.2.1.2 Failures. If one or more sample units fail to pass group C inspection, the sample shall be considered to have failed. When an item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure have been determined and appropriately corrected. The contractor shall explain to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all the tests shall be repeated.

4.6.2.1.3 Disposition of sample units. Sample units which have been subjected to group C inspection shall not be delivered on the contract or purchase order.

4.6.2.1.4 Noncompliance. If a sample fails to pass group C inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which were manufactured using essentially the same materials and processes, and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity has been taken. After the corrective action has been taken, group C inspection shall be repeated on additional sample units (all inspections,

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.

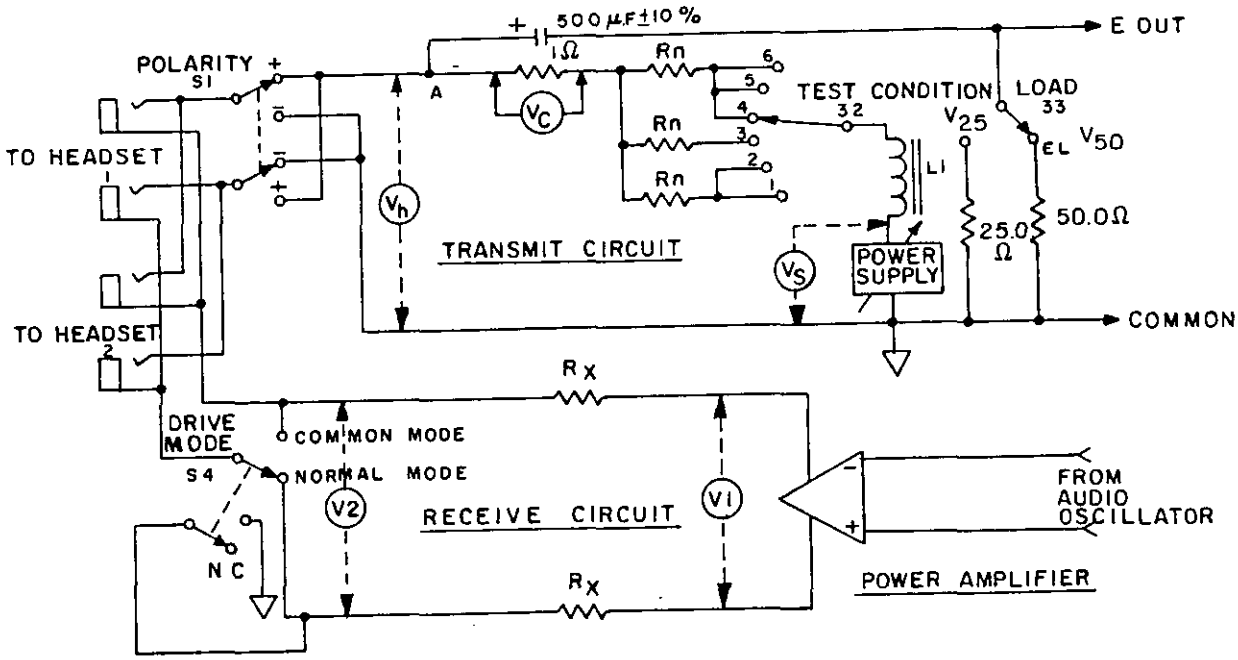

Test conditions	Vs ±5%	Rt ±1%	DCR HDST	Ih
1	4.8 V	226.5 ohms	120 ohms	14.0 mA
2	7.0 V	"	100 ohms	21.1 mA
3	4.0 V	315.5 ohms	400 ohms	5.5 mA
4	24.0 V	163.5 ohms	40 ohms	118.0 mA
5	20.0 V	"	45 ohms	96.0 mA
6	28.0 V	"	34 ohms	141.0 mA

NOTES:
1. All resistors ±1 percent tolerance.
2. R_t is the total DC resistance between A and B.
3. $R_n = R_t$ - 1 ohm - DCR (L1) - R (Power supply).
4. L1 is greater than or equal to 1H, DCR is less than or equal to 60 ohms at 200 mA, Z is greater than or equal to 1000 ohms at 200 Hz.
5. Power supply: 3.0 to 30.0 V dc, current limited to 150 mA maximum.
6. Power amplifier: Output power is greater than or equal to 0.5 watt, output Z is less than or equal to 10 ohm.
7. Headset dc resistance may be calculated from: H_{DST} DCR = V_h (in volts) /Ih (in amperes).
8. Vc is numerically equal to the dc current through the headset. (Ih).
9. Ih is a function of R_t, supply voltage, and the headset DCR; values of Ih and DCR listed are typical.
10. Rx = 150 ohms for 300 ohm receive impedance.
    Rx = 300 ohms for 600 ohm receive impedance.

FIGURE 19. Test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

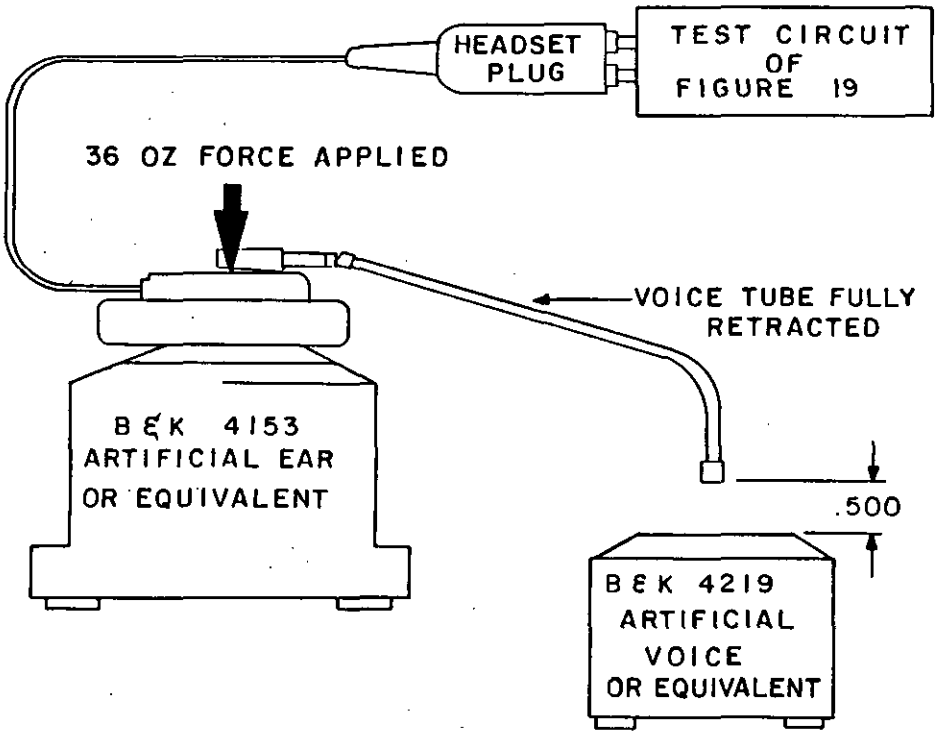


FIGURE 20. Test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.

or the inspection which the original sample failed, at the option of the qualifying activity). Groups A and B inspections may be reinstituted; however, final acceptance and shipment shall be withheld until the group C inspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

4.7.3 Inspection of packaging. The sampling and inspection of the preservation and interior pack marking shall be in accordance with the group A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.7 Methods of inspection.

4.7.1 Visual and mechanical inspection. Headsets shall be examined to verify that the materials, design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements (see 3.1, 3.3, 3.4, 3.13, and 3.14).

4.7.2 Transmit output level at 1,000 Hz (see 3.5.1). The test circuit of figure 19 shall be used for measurement. Limits apply to test conditions one through six (see figure 19) at a frequency of 1,000 Hz.

All transmit measurements shall be made using a sound field source having a frequency response flat within ±1 dB from 250 to 5,000 Hz that can be maintained over a range of 64 to 114 dB SPL. Unless otherwise specified, the sound field shall be calibrated to 94 dB SPL, the normal test level, at one half inch (12.7 mm) above the center of the mouth opening. The tip of the headset voice tube shall be placed at this distance. The tube shall be perpendicular to the mouth opening, and the tube and mouth opening shall be coaxial. The voice tube shall be fully retracted (see figure 20). The transmit output load shall be 50 ohms.

4.7.3 Transmit loudness level (see 3.5.2). Output level measurements shall be made at ten discrete frequencies and shall be used to derive the transmit loudness level (TXLL). Measurements shall be made in accordance with 4.7.2. Test conditions are 1, 2, 4, 5 and 6.

$$TXLL = 20 \log_{10} \left[\sum_{i=1}^{n-1} \left(\frac{V_i^{\frac{1}{2.2}} + V_{i+1}^{\frac{1}{2.2}}}{20} \right) \right]^{2.2}$$

i	1	2	3	4	5	6	7	8	9	10	11
fi	315	400	500	630	800	1000	1250	1600	2000	2500	3150

i = Computational index
fi = Test frequency (Hz)
Vi = Output voltage (V rms)

4.7.4 Transmit frequency response (see 3.5.3). The 200 Hz to 5,000 Hz response shall be measured as specified in 4.7.2 except the sound field shall be calibrated to 87 dB SPL.

4.7.5 Voice switching.

4.7.5.1 Switch point (see 3.5.4.1). The test specified in 4.7.2 shall be performed except the test level shall vary from 64 to 94 dB SPL. The level at which switching occurs shall be recorded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

4.7.5.2 Switch depth (see 3.5.4.1). The test specified in 4.7.3 shall be performed. The transmit output level, switch-up time, and switch-down time shall be recorded.

4.7.6 Warm-up time (see 3.5.5.). The test specified in 4.7.3 shall be performed except the power applied to the headset to reach 71 percent of the steady state value shall be recorded.

4.7.7 Distortion (see 3.5.6). Distortion measurements shall be made at 300, 1,000 and 3,000 Hz according to 4.7.2 except the acoustic input at 3,000 Hz shall be 84 dB SPL.

4.7.8 DC resistance (see 3.5.7). The dc resistance in ohms shall be Vh(in volts)/IH (in amperes) (see figure 19).

4.7.9 Output impedance (see 3.5.8). The output impedance (Zout) in ohms shall be $50 (V_{50} - V_{25})/(2 V_{25} - V_{50})$ (see figure 19).

4.7.10 Transmit noise (see 3.5.9). Transmit noise shall be measured across the 50 ohm output load (test condition 4) using a Wilcom T-194C or equivalent transmission and noise test set. Connect output to LINE I T&R terminal of set. Switches shall be set as follows: LINE SELECT to (RCV I/SEND II), IMPEDANCE to (900), TERM/BRDG to(BRDG), METER RANGE to (-3 to +3), METER RESPONSE to (NORMAL), WEIGHTING to (C-MSG).

4.7.11 Receiver examination and measurement (see 3.6.1). All receiver parameters shall be measured with a Bruel and Kjaer 4153 Artificial Ear which is equivalent to the IEC coupler for Supra Aural earphones per ANSI S3.7-1973. A 36 oz. force shall be applied to the receiver housing to maintain a complete acoustic seal during coupler measurements (see figure 20). The headset receiver drive level at VI (open circuit) shall be -38 dBV, and the test frequency shall be 1,000 Hz, unless stated otherwise.

All specifications shall apply to test condition 3 at volume control position 1 unless otherwise specified. The measurement configuration of 4.7.2 shall apply.

4.7.12 Receiver loudness level (RXLL) (see 3.6.2). Output level measurements shall be made at ten discrete frequencies and used to derive the receiver loudness level (RXLL).

Measurements shall be made in accordance with 4.7.11.

$$RXLL = 20 \log_{10} \left[\sum_{i=1}^{n-1} \frac{(10^{Pi/44} + 10^{Pi+1/44})}{20} \right]^{2.2}$$

i	1	2	3	4	5	6	7	8	9	10	11
fi	315	400	500	630	800	1000	1250	1600	2000	2500	3250

i = Computational index.
fi = Test frequency (Hz).
Pi = Effective acoustical output (dB). Pi is calculated by measuring the sound pressure output (dB SPL) at fi.

4.7.13 Receiver volume control (see 3.6.3). The test specified in 4.7.11 shall be performed. The lowest and highest volume control positions shall be utilized. The dB difference in the output levels shall be recorded.

4.7.14 Compression level (see 3.6.4). The test specified in 4.7.11 shall be performed except the drive level shall be -15 dBV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

4.7.15 Frequency response (see 3.6.5). The test specified in 4..7.11 shall be performed except the drive level shall be swept from 100 Hz to 6,000 Hz.

4.7.16 Acoustic limiting (see 3.6.6). The test specified in 4.7.11 shall be performed except the drive level shall be +15 dBV.

4.7.17 Receiver linearity (see 3.6.7). The test specified in 4.8, shall be performed except the 1,000 Hz drive level shall vary from -45 dBV to +15 dBV.

4.7.18 Common mode rejection (see 3.6.8). A -4 dBV 1,000 Hz drive shall be applied across the simplexed headset sleeves. The receiver output shall be measured according to 4.7.11.

4.7.19 Receiver distortion (see 3.6.9). The test specified in 4.7.11, shall be performed except the test frequencies shall be 300, 1,000 and 3,000 Hz and the receiver volume control shall be in the lowest position.

4.7.20 Transition time.

4.7.20.1 AGC attack time (see 3.6.10.1). The test specified in 4.7.11 shall be performed except that the drive level shall be step increased from a level below the compression level to a level above the threshold.

4.7.20.2 AGC release time (see 3.6.10.2). The test specified in 4.7.11 shall be performed except the drive level shall be step decreased from a level above the threshold to a level below the threshold.

4.7.20.3 Power-up time (see 3.6.10.3). The test specified in 4.7.11 shall be performed except that the supply power shall be turned from off to on. The time required for power-up shall be recorded.

4.7.20.4 Power-down time (see 3.6.10.4). The test specified in 4.7.11 shall be performed except that the supply power shall be turned from on to off. The time required for power-down shall be recorded.

4.7.21 Input impedance (see 3.6.11). Receiver impedance shall be calculated from $Z = 300\ V2/(V1-V2)$ from 300 to 3,000 Hz (see figure 19).

4.7.22 Reverse sidetone (see 3.7). With the microphone acoustic tube sealed, and a receiver drive of -12 dBV, the transmit output level shall be tested according to 4.7.3 except the frequencies shall be from 200 to 10,000 Hz.

4.7.23 Insulation breakdown (see 3.8). Five 10 second applications of a 1,000 V rms, 60 Hz signal shall be applied between the simplexed tip/sleeve leads and all exposed metal parts.

4.7.24 Strain relief (see 3.9). Headset cables shall receive a minimum of 10 pounds pull for one second.

4.7.25 Static immunity (see 3.10). Repeated static discharges shall be applied to the outer surfaces of the headset under simulated normal conditions. The types of discharge shall include: 50 discharges of each polarity, through a 10,000 ohm resistor connected to a 60 picofarad capacitor charged to 20 kilovolts; and 20 discharges of each polarity, through a 500 ohm resistor connected to a 100 picofarad capacitor charged to 10 kilovolts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

4.7.26 Environmental test methods.

4.7.26.1 Temperature, humidity and pressure (see 3.11.1). The headset shall be exposed to the following conditions:

a. Storage temperature, humidity and pressure.. The headset shall be returned to standard environmental conditions from the storage conditions, after a suitable drying out period. Dwell time at each extreme shall be 48 hours.

Temperature range	-40°C to +65.5°C
Humidity range	5% to 95% RH
Pressure range	8.7 to 14.7 psia

b. Operating temperature, humidity and pressure. The headset shall meet the requirements of 3.11.1 under the following environmental conditions:

Temperature range	0°C to 50°C
Humidity range	5% to 95% RH (non-condensing)
Pressure range	9.4 to 14.7 psia

c. Temperature/humidity cycling (storage). The headset shall meet the requirements of 3.11.1 after being cycled at any convenient rate three times through the following conditions:

30 minutes at 150°F and 15% RH
30 minutes at 90°F and 90% RH
30 minutes at -40.0°F and any convenient RH

Condensation shall be avoided and the headset dried out before operation.

4.7.26.2 Shock (see 3.11.2). The headset shall be subjected to 18 random drops onto an asphalt tile-covered concrete floor. Drop height for the capsule shall be 54 inches; for the amplifier, 30 inches.

4.7.26.3 Vibration (see 3.11.3). The headset shall be exposed to 5 g's peak (displacement less than .03 inch) sinusoidal vibration along each of three orthogonal axes. Frequency shall be swept logarithmically at 0.1 octave/min from 5 to 100 Hz and 0.25 octave/min from 100 to 500 Hz for a total of approximately one hour in each axis.

4.7.27 Cable flexing (see 3.12). The cable shall be run through 50,000 flex cycles over a 1/4" radius, 60° to each side of vertical at a rate of 85 flex cycles/minute with a load of 12 ± 1/4 oz., attached to the lower end of the cable. One cycle equals two complete 120° arcs of travel. The 100,000 flex cycles shall be computed as arithmetic mean of 5 test samples, the lowest single sample life being 66,000 flex cycles. Failure of the cable shall be considered as a 25% increase in the initial resistance of the test sample in which the 4 or 6 conductors are connected in series.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. Headset-microphone assemblies shall be cleaned in accordance with MIL-P-116, process C-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

5.1.1.2 Drying. Headset-microphone assemblies shall be dried in accordance with MIL-P-116.

5.1.1.3 Preservative application. Preservatives shall not be used.

5.1.1.4 Unit packs. Each headset-microphone assembly shall be individually unit packed in accordance with submethod IA-8 of MIL-P-116 insuring compliance with the applicable requirements of that specification. Cushioning shall be noncorrosive and shall not crumble, flake, powder or shed. Each unit pack shall be placed in a supplementary container conforming to PPP-B-636, class weather resistant.

5.1.1.5 Intermediate packs. Intermediate packs are not required.

5.1.2 Level B. The requirements for level B shall be as specified for level A except that submethod IC-1 or IC-3 of MIL-P-116 shall be substituted for submethod IA-8 and the supplementary container shall conform to PPP-B-636, class domestic.

5.1.3 Level C. The level C perservation of headset-microphone assemblies shall conform to the MIL-STD-2073-1 requirements for this level.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Headset-microphone assemblies, preserved as specified in 5.1, shall be packed in wood boxes conforming to PPP-B-601, overseas type or PPP-B-621, class 2. Closure and strapping shall be in accordance with the applicable container specification except that metal strapping shall conform to QQ-S-781, type I, finish A. The requirments for level B packing shall be used when the total quantity of a stock numbered assembly for a single destination does not exceed a packed volume of one cubic foot (0.0283 cubic meter).

5.2.2 Level B. Headset-microphone assemblies, preserved as specified in 5.1, shall be packed in fiberboard containers conforming to PPP-B-636, class weather resistant, style optional, special requirements. The requirements for box closure, waterproofing, and reinforcing shall be in accordance with method V of the PPP-B-636 appendix.

5.2.3 Level C. Headset-microphone assemblies, preserved as specified in 5.1, shall be packed in fiberboard containers conforming to PPP-B-636, class domestic, style optional, special requirements. Closures shall be in accordance with the appendix thereto.

5.2.4 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination equal 40 cubic feet (1.1328 cubic meters) or more. Quantities less than 40 cubic feet need not be unitized. Unitized loads shall be uniform in size and quantities to the greatest extent practicable.

5.2.4.1 Level A. Headset-microphone assemblies packed as specified in 5.2.1, shall be unitized on pallets in conformance with MIL-STD-147, load type I, with a wood cap (storage aid 5) positioned over each load.

5.2.4.2 Level B. Headset-microphone assemblies, packed as specified in 5.2.2, shall be unitized as specified in 5.2.4.1 except that weather resistant fiberboard caps (storage aid 4) shall be used in lieu of wood caps.

5.2.4.3 Level C. Headset-microphone assemblies, packed as specified in 5.2.3, shall be unitized as specified in 5.2.4.2 except that the fiberboard caps shall be class domestic.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:45Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special or other identification marking required by the contract (see 6.2), each unit, supplementary, and exterior container, and unitized load shall be marked in accordance with MIL-STD-129. The complete military or contractor's type or part number, as applicable (including the CAGE), shall be marked on each unit and supplementary pack in accordance with the identification marking provisions of MIL-STD-129.

5.4 General.

5.4.1 Exterior containers. Exterior containers (see 5.2.1, 5.2.2, and 5.2.3) shall be of minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.7.3.

6. NOTES.

6.1 Intended use.

6.1.1 Headset-microphone assemblies. The headset-microphone assemblies covered by this specification are intended for use in low ambient noise environments below 85 dBA SPL.

6.1.2 Packaging requirements. The preservation, packing, and marking herein are intended for direct shipments to the Government. However, at the option of the contractor, or when so specified, the packaging provisions herein are also applicable for the preparation of headset-microphone assemblies for shipment from the parts contractor to the original equipment manufacturer.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Levels of preservation and packing required (See 5.1 and 5.2).

c. If special or additional identification marking is required (see 5.3)

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time set for award of contract, qualified for inclusion in Qualified Products List whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Air Force 2750 ABW, ATTN: ESP Gentile AFS OH 45444; however, information pertaining to qualification of product may be obtained from the Defense Electronics Supply Center (DESC-E), Dayton, Ohio 45444. Application for qualification tests shall be made in accordance with provisions governing qualification SD-6 (see 6.3.1).

6.3.1 SD-6. Copies of "Provisions Governing Qualification SD-6" may be obtained upon application to Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

6.4 Condition for use of level B preservation. When level B preservation is specified (see 5.1.2), this degree of protection should be used for the acquisition of headset-microphone assemblies for resupply worldwide under known favorable handling, transportation, and storage conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.

6.5 Anechoic room or chamber (free-field room or environment). An anechoic or free-field environment is a room or area whose boundaries absorb effectively all the sound incident thereon, thereby affording essentially free-field conditions.

6.6 Subject term (key-word) listing.

Headset, lightweight
Voice tube
Supra-aural

CONCLUDING MATERIAL

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5965-F195)

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 - 704-034/M241

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:45Z
Check the source to verify that this is the current version before use.