MILITARY SPECIFICATION

JACKET, UTILITY, WOMAN'S

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of blue, polyester-cotton (durable-press), lightweight jacket.

1.2 Size. The jacket shall be furnished in one of the following sizes as specified (see 6.2).

Short	Regular	Long
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18
	20	

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	Fasteners, Slide, Interlocking
V-T-276	Thread, Cotton
DDD-L-20	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Aeronautical Systems Division, ASD/ENESS, Wright-Patterson AFB, Ohio 45433, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-297	Cloth, Interlining, Cotton Warp, and Spun Hair-Wool Filling
MIL-T-3530	Thread and Twine; Mildew Resistant or Water Repellent Treated
MIL-W-5664	Webbing, Textile, Elastic, Cotton

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking For Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Department of Defense (DOD) Standard Shades for Buttons 1966

(Copies of this publication can be obtained from The Color Association of the United States, Inc.; 200 Madison Avenue; New York, New York 10016.)

3. REQUIREMENTS

3.1 Materials

3.1.1 Basic fabric. The basic fabric shall be a polyester-cotton cloth with a durable water repellent finish. The basic fabric shall conform to the requirements of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE I. Basic fabric.

Characteristics	Requirements 1/
Fiber content of untreated cloth	
Polyethylene glycol terephthalate	65 (plus or minus 3) percent 2/
Cotton	32 percent (minimum) 2/
Nonfibrous content of untreated cloth	2 percent (maximum) starch and protein content, including chloroform-soluble and water-soluble materials
Yarn ply	2 ply warp and filling yarns
Weave	Plain
Color	See 3.1.1.1
Sulfur content	See 3.1.1.1
Colorfastness	
Light	Good
Crocking	Good
Perspiration	Good
Laundering	Good
Wet dry cleaning	Good
Weight	5.6 (minimum) and 6.2 (maximum) ounces per square yard
Number of yarns	
Warp	120 yarns per inch (minimum)
Filling	60 yarns per inch (minimum)
Breaking strength	
Warp	170 pounds (minimum)
Filling	90 pounds (minimum)
Tearing strength	
Warp	7 pounds (minimum)
Filling	4 pounds (minimum)
Seam efficiency	80 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE I. Basic fabric. - Continued

Characteristics	Requirements 1/
Dimensional stability	
Shrinkage or elongation of warp	2 percent (maximum)
Shrinkage or elongation of filling	1 percent (maximum)
Water extract (pH value)	5.5 minimum 8.5 maximum
Water resistance under hydrostatic pressure	
Initial	38 centimeters (minimum)
After three launderings	35 centimeters (minimum)
After one dry cleaning	35 centimeters (minimum)
Water resistance under dynamic conditions	
Initial	15 percent (maximum)
After three launderings	15 percent (maximum)
Spray rating of water resistance	
Initial (three determinations)	100, 100, and 90 (minimum)
After one dry cleaning (three determinations)	80, 80, and 70 (minimum)

1/ Except for the requirements for the fiber content and the nonfibrous content, the requirements of this table shall apply to the finished cloth after the application of the water-resistant treatment.
2/ The requirements for the fiber content shall be based on the dry desized weight of the untreated cloth.

3.1.1.1 Color. The cloth shall be dyed to match the standard sample of USAF color shade No. 1157 (see 6.3) under artificial daylight having a color temperature of 7,500 degrees Kelvin and to be a good approximation to the standard sample under incandescent lamplight at 2,800 degrees Kelvin. The dye used shall not be a sulfur dye and shall not be a dye containing elementary sulfur or sulfur compounds capable of oxidation to sulfuric acid.

3.1.2 Lining. Unless otherwise specified herein, the material for lining the sleeves and the material for the back yoke shall be nylon taffeta cloth. As an option, the basic fabric specified in 3.1.1 may be used for the back yoke. The nylon taffeta cloth shall be USN color shade 3356 (see 6.3). The finished nylon taffeta cloth shall be clean and woven evenly. The warp and the filling yarns of the nylon taffeta cloth shall be first quality; 70 denier; bright, semibright, or semidull; continuous

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

filament yarns with 34 filaments and with sufficient twist to meet the requirements of this specification. The fibers shall be nylon 66 (polyhexamethylene adipamide), having a minimum melting point above 450 degrees Fahrenheit. The nylon taffeta cloth shall conform to the additional requirements specified in table II.

TABLE II. Nylon cloth.

Characteristics	Requirements
Weave	Plain
Weight	1.9 (±0.15) ounces per square yard
Texture	
Warp	108 per inch, minimum
Filling	71 per inch, minimum
Breaking strength	
Warp	125 pounds per inch, minimum
Filling	85 pounds per inch, minimum
Tear strength	
Warp	5 pounds, minimum
Filling	3.5 pounds, minimum
Shrinkage	2 percent, warp and filling
Colorfastness	
Laundering	Good
Perspiration	Good
Crocking	Good
Nonfibrous content	2 percent (maximum) starch and protein content, including chloroform-soluble and water-soluble materials

3.1.3 Slide fastener. The slide fastener for the front closure shall conform to type IV, style 8, size IM of V-F-106. The chain shall be brass or zinc alloy with a short tab pull. The tape shall be cotton or cotton warp and nylon filling, shall be 5/8 to 3/4 inch wide, and shall be vat dyed to approximate the shade of the basic fabric. If a brass chain is supplied, the metal components shall have a black chemical finish. All metal components shall be from the same supplier. The length of the slide fastener shall be as follows: 19 inches for sizes short 6 through 18, 20 inches for sizes regular 6 through 20, and 21 inches for sizes long 6 through 18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

3.1.4 Buttons. The buttons for the collar closure and the cuff closures shall conform to type II, class D, style 20 or 21, size 24 lines of V-B-871. The buttons shall have a glossy finish and shall be DOD Button Shade Blue BU Cable No. 62002 (see DOD Standard Shades for Buttons 1966).

3.1.5 Thread. The thread for seaming, stitching, buttonhole making, and bartacks shall conform to type IA3, ticket No. 50, 3 ply of V-T-276 and to type IA3, ticket No. 60, 3 ply of V-T-276. The thread for sewing on buttons shall conform to type IA3, ticket No. 20, 4 ply of V-T-276. The thread shall have a water repellent finish that conforms to type II, class 1 of MIL-T-3530. All colored thread shall be vat dyed to match the color of the material upon which it is sewn and shall have good colorfastness to laundering and weathering.

3.1.6 Interlining. The interlining for the pocket welt shall conform to type II, class 2 of MIL-C-297. The interlining for the collar, the collar stand, and the cuffs shall be the basic fabric specified in 3.1.1.

3.1.7 Elastic tape. The elastic tape used for shirring the jacket bottom hem at the sides and the sleeve bottoms shall conform to class 1 of MIL-W-5664. The width of the elastic tape shall be 1 inch for the jacket hem and 3/8 inch for the sleeve bottoms. The color of the elastic tape shall be black.

3.2 Design. The jacket shall be single breasted and shall have a covered slide fastener front closure, a two-button convertible collar, two inverted slash pockets, one inside patch pocket, raglan sleeves with cuffs that button, a double back yoke, and a shirred elastic waistband on each side.

3.3 Construction. The jacket shall be constructed in accordance with table III; however, the manufacturer will not be required to follow the exact sequence of operations as listed therein. The thread and the fabric shall not be lubricated by any means prior to or during the seaming.

3.3.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified herein shall conform to FED-STD-751. If two or more methods or seam or stitch types are given for the same part of an operation, any one of them may be used. The looper (under thread) of stitch type 401 shall be on the inside of the jacket.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1	Cut and shade mark (a) Cut the jacket in accordance with the patterns which have markings for placement of pockets, darts, buttons, and buttonholes; sizes; warp directional lines; and notches for proper assembly of all parts. (b) Unless otherwise specified herein, cut all parts of the basic fabric from the same piece of basic material. The slash pockets, the patch pocket, the collar, the cuffs, the pocket welt interlining, and the hanger loop may be cut from ends. Parts cut from ends shall approximately match the shade of the other parts of the jacket. (c) Cut the hanger loop of sufficient width to conform to the finished measurement specified in No. 5(a). The hanger loop may be stripped and placed on rolls. (d) Cut the elastic tape for the bottom hem 2-1/2 inches long. Cut the elastic tape for the sleeve bottoms 1-3/4 inches long. (e) Replace at the time of cutting any part containing holes or seriously weakening defects such as smashes, multiple floats, slubs, snags, or pulls. (f) Replace any part damaged during the manufacturing process by needle chews, tears, holes, mends, burns, or scissor or knife cuts.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(g) Mark or ticket all parts, except parts cut from ends, to insure a uniform shade and size throughout the jacket and the proper assembling of all parts. If shade marking is used, the marking shall not show through and be visible on the outside of the finished jacket.			
2	Make bust darts			
	(a) Fold the bust darts as indicated by the marks on the pattern; stitch, tapering to nothing 3/8 inch below the drill hole.	301	OSf-1	12-14
	(b) Press the bust darts flat with the folded edge toward the bottom.			
3	Make collar			
	(a) Position the collar interlining to the undercollar with the edges even and stitch together along the top and side edges.	301	SSa-1	12-14
	(b) Seam the topcollar and the undercollar pieces together along the top and under edges with a 3/8-inch seam.	301	SSe-2(a)	12-14
	OR			
	(c) As an option to No. 3(a) and 3 (b), join the three plies of the collar in one operation with the topcollar and undercollar face to face and the collar interlining superimposed on the undercollar.	301	SSa-1	12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(d) Trim the corners. Turn and work out the edges and the corners. Edge stitch the collar 1/16 inch from the turned edges.	301	SSe-2(b)	12-14
4	Make cuffs			
	(a) Position the cuff interlining to each cuff. Stitch the interlining 1/8 inch from the raw edge on all four sides to the cuff.	301	SSa-1	12-14
	(b) Fold each cuff in half, and seam the pointed and the square ends. Trim the corners. Turn and work out the point and the edges.	301	SSa-1	12-14
5	Make hanger			
	(a) Double stitch the hanger, which shall be made of the basic fabric, either with a cover stitch on the underside or with the edges folded under. The finished hanger shall be 2-3/8 inches.	406 or 301	EFh-1 or EFp-1	12-14 12-14
6	Make back			
	(a) Insert the lower back between the two yoke pieces, forming two pleats on each side of the lower back; stitch with a single row of stitching 3/8 inch from the edge. The folded edge of the pleats on the outside of the back shall face the armholes. NOTE: The back pleats may be prestitched prior to joining the lower back to the yoke pieces.	301	SSa-1	12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
7	Attach label			
	(a) Center the label on the patch pocket, and sew the label on all four sides to the patch pocket.	301	SSa-1	12-14
8	Make and attach patch pocket to left facing			
	(a) Hem the top of the patch pocket. The finish patch pocket hem shall be 1/4 inch wide.	301	EFb-1	12-14
	(b) Turn in the raw edges of the pocket. Stitch 1/16 inch from the turned edge to the left front facing, as indicated by the marks on the pattern.	301	LSd-1	12-14
9	Hem facing			
	(a) Hem the back edge of the facing. The finished facing hem shall be 1/4 inch wide.	301	EFb-1	12-14
10	Make slash pockets			
	(a) Make a double-welt inverted slash pocket in each front at the pattern marks. The top welt shall be 7/8 inch (plus or minus 1/8 inch) wide. The inside welt shall be 1/2 inch (plus or minus 1/8 inch) wide. The depth at the center of each pocket shall be not less than 5 inches. The length of each pocket opening shall be not less than 6 inches.			
	(b) Fold in half and press the top welt. Place the interlining even with the folded edge, and single stitch 1/8 inch from the folded edge.	301	LSbj-1	12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operati - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(c) Fold and sew the welt and the facing pieces to the pocketing with a single row of stitching 1/16 inch from the edge. If the facing and the welt pieces are cut with the selvage edge, the selvage edge need not be folded (turned over).	301	LSq-1 and LSd-1	12-14
	(d) Sew the pocketing with the inside welt on the front side of the outer shell and the top welt on the side fronts at the drill marks with a single row of stitching at each end of the pocketing and the top welt.	301	LSq-2(a)	12-14
	(e) Cut the opening for the pocket. Tongue notch the corners.			
	(f) Turn the pocketing through the slits, doubled over at the front edge for reinforcement to form a 1/2-inch (plus or minus 1/8-inch) inside welt.			
	(g) Raise stitch the bottom of the inside welt through the front and the pocketing with a single row of stitching 1/16 inch from the edge.	301	LSq-2(b)	12-14
	(h) Fold the top welt over the inside welt.			
	(i) Sew the tongues at the corners to the welts and the facing on the inside with a single row of stitching.	301	SSa-1	12-14
	(j) Place the facing under the opening.			
	(k) Raise stitch the seam joining the facing to the top welt and the end of the opening through the pocket with a single row of stitching 1/16 inch from the edge.	301	LSq-2(b)	12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations. - Continued

No	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(l) Stitch around the pocketing with a single row of stitching 1/2 inch from the edge.	301	SSa-1	12-14
	(m) Secure the corners of each end of the pockets at the base of the tongue at the underside with a 1/2-inch to 5/8-inch bartack.	bar-tack		28 stitches per bartack
11	Attach slide fastener (see figure 1)			
	(a) Position the slide fastener between the right and left front edges of the outer shell and the facing, and stitch through all plies. Turn and roll the front edge of the outer shell out so that the chain is covered; stitch 5/16 to 3/8 inch and 1/16 to 1/8 inch from the folded edges of the outer shell and the facing, respectively. The slide fastener chain shall finish 3/4 inch (plus or minus 1/8 inch) below the raw edge of the neckline and 1 inch (plus or minus 1/8 inch) above the finished bottom.		see section A-A of figure 1	12 14
12	Set sleeves			
	(a) Join the sleeve lining to the sleeves 1/16 to 1/8 inch from the edge.	301	SSa-1	12-14
	(b) Seam the sleeves with the lining to the back and the fronts with a double-lapped, double-stitched seam not less than 3/16-inch gage and not more than 5/16-inch gage, with the sleeves lapped over the fronts and the back parts.	301 or 401	LSc-2	12-14

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations. - Continued

N	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
13	Join side and underarm sleeve seams			
	(a) Join the side and the underarm sleeve seams and lining in a continuous operation, with double-lapped, double-stitched seams not less than 3/16-inch nor more than 5/16-inch gage, with the fronts lapped on the back.	301 or 401	LSc-2	12-14
14	Join cuffs to sleeves			
	(a) Form a pleat in each sleeve, with the folded edge of the pleat facing the back of the sleeve. Position each cuff to the sleeve bottom according to the notches. Seam each cuff to the sleeve 1/2 inch from the raw edge.	301	SSa-1	12-14
	(b) Overedge stitch the raw edges of each cuff and the sleeve seam allowance together.			
	(c) Turn each cuff down with the seam allowance turned up, and raise stitch 1/4 inch from the folded edge. Continue the stitching across the open section of the sleeve bottom, catching the elastic tape in the stitching.	301	LSak	12-14
15	Join collar to neck opening			
	(a) Position the undercollar to the neck opening, and single stitch 3/8 inch from the raw edges, catching the hanger in the center of the collar. The opening of the finished hanger shall be 2-3/8 inches long.	301	SSa-1	12-14
	(b) Turn the collar up with the seam allowance turned down. Turn in the seam allowance of the topcollar. Seam the collar to the neck 1/16 inch from the turned in edge.	301	LSb-1	12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
16	Hem bottom			
	(a) Stitch the ends of the elastic tape to the bottom of the jacket over the side seam.	301	SSa-1	12-14
	(b) Turn up the bottom of the jacket with the raw edges turned in, and stitch 1/16 inch from the folded edge, catching the elastic in the hem. The hem at the front shall be mitered so that it will not interfere with the slide fastener. The width of the finished bottom hem shall be not less than 3/4 inch or more than 1 inch.			
	(c) Stitch across the hem, catching the end of the elastic tape.	301	SSa-1	12-14
17	Mark and make buttonhole			
	(a) Mark and make two horizontal straight buttonholes to fit a 24-line button on the right side of the collar as indicated by the pattern marks. The front end of the finished buttonholes shall be 5/8 inch from the front end of the collar.	buttonhole		52-54 stitches per buttonhole
	(b) Mark and make one horizontal straight buttonhole to fit a 24-line button in each cuff as indicated by the pattern marks. The front end of the finished buttonholes shall be 3/4 inch from the pointed end of the cuff.	buttonhole		52-54 stitches per buttonhole
18	Sew on buttons			
	(a) Sew two buttons on the left side of the collar, to the under collar and the interlining only, to correspond with the buttonholes.	301 or		14-16 stitches per

MIL-J-83486 (USAF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
		101 or hand		per button 20-22 stitches per button 4-6 stitches per button
	(b) Sew two buttons on the square end of each cuff to correspond with the buttonholes. The first button shall be 1 inch from the square end of the cuff. The second button shall be 1-1/4 inches from the first button	301 or 101 or hand		14-16 stitches per button 20-22 stitches per button 4-6 stitches per button
19	Clean and press			
	(a) Trim the ends of all thread. Remove all loose thread ends from the jacket.			
	(b) Remove all spots, stains, and shade tickets from the jacket.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE III. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(c) Press the jacket smooth, taking care to remove gloss marks and creases.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

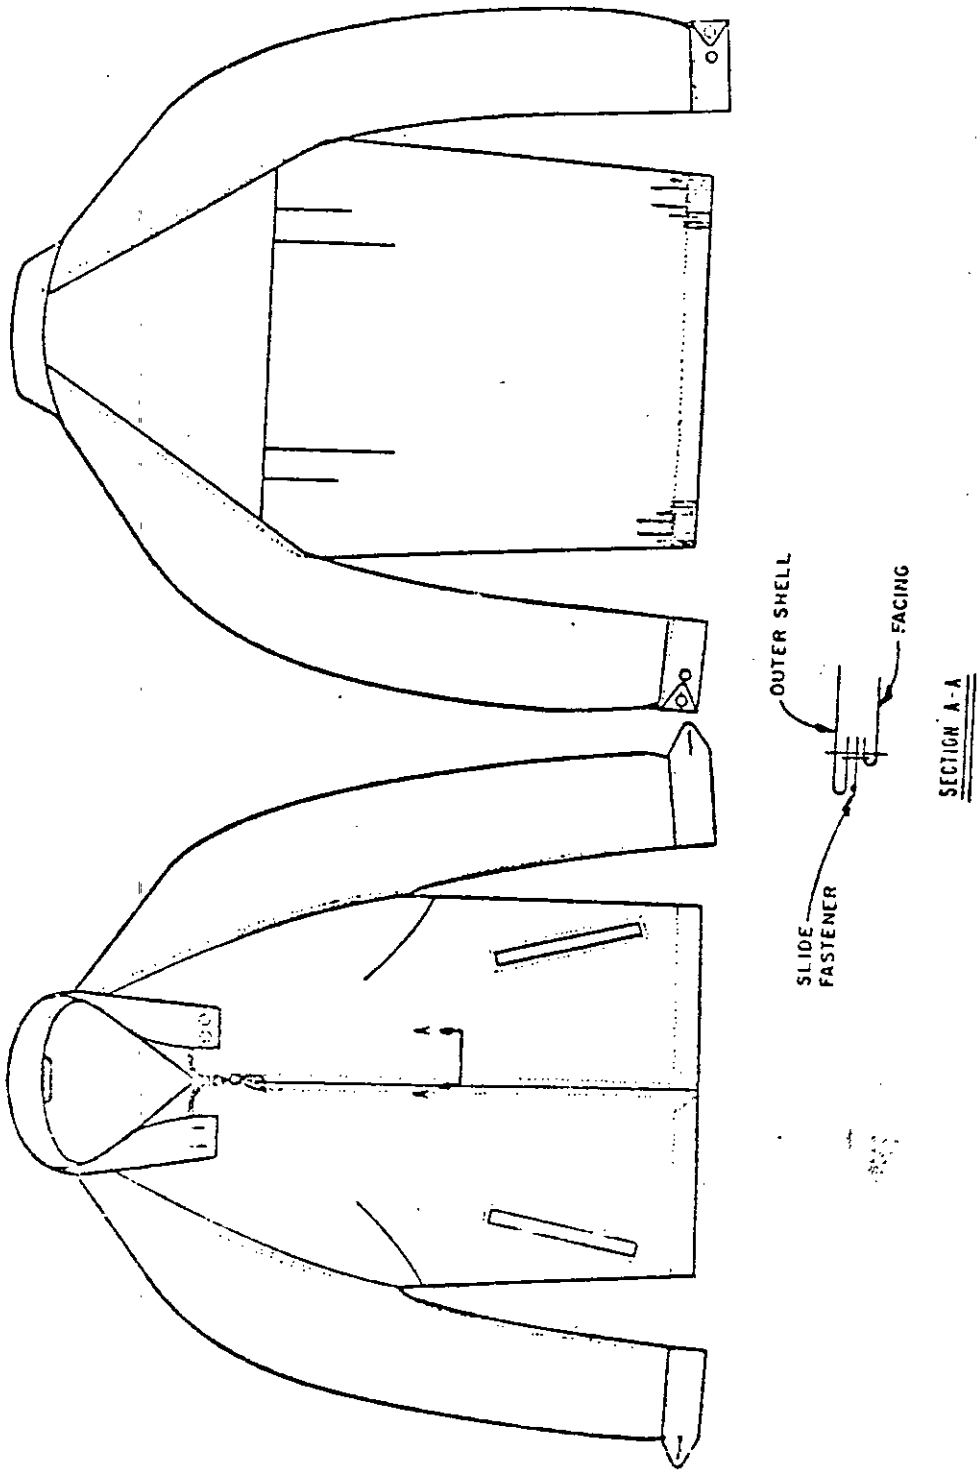


FIGURE 1. Jacket

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:44Z
Check the source to verify that this is the current version before use.

3.3.1.1 Ends of seams and stitchings, thread breaks, and skipped stitches. The ends of all seams and stitchings not caught by other seams and stitchings shall be backtacked not less than 1/2 inch. Thread breaks of stitch type 301 shall be secured by stitching back of the break not less than 1/2 inch. Thread breaks or skipped stitches of stitch type 401 shall be backstitched, not less than 1 inch, with the stitching superimposed and anchoring the ends of the break.

3.4 Patterns. When specified (see 6.2), standard patterns will be furnished, by the Government, to the manufacturer for use in cutting the working patterns. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The parts of the jacket shall be cut, from the specified materials, in accordance with the pattern parts specified in table IV.

TABLE IV. Pattern parts.

Materials	Pattern Parts	Parts Cut
Basic fabric (see 3.1.1)	Front	2
	Back	1
	Sleeve	2
	Slash pocket	2
	Pocket welt	2
	Patch pocket	1
	Collar	2
	Collar interlining	1
	Cuff	2
	Cuff interlining	2
	Back yoke	1
	Back yoke lining 1/	1
	Pocket welt interlining	2
Lining (see 3.1.2)	Sleeve	2
	Back yoke lining 1/	1

1/ The back yoke lining may be cut from either the basic fabric specified in 3.1.1 or the lining specified in 3.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

3.5 Label. Each jacket shall have a combination identification and care instruction label that conforms to type I, classes 1 and 3 of DDD-L-20. The label shall have colorfastness to laundering and dry cleaning. The following information shall be printed on the label.

Jacket, Utility, Woman's
Manufacturer's Name or Trademark 1/
Size 1/

Care Instructions

Preferred Method (Laundering)
Spot wash badly soiled areas.
Wash in hot water (140° F) using detergent.
Rinse at least three times.
Machine spin or squeeze by hand.
Press with moderately hot iron (synthetic setting).

Alternate Method (Dry cleaning)
Dry cleaning in pure solvent or in detergent will not reduce water resistance provided the detergent is removed by rinsing. If poor water resistance is noted after dry cleaning, rinsing in water and then drying and pressing will renew water resistance.

1/ The manufacturer shall include the applicable information.

3.6 Finished measurements. The finished measurements of the jacket shall conform to table V. The finished measurements of the jacket shall be taken as follows: Measure the 1/2 bust, with the slide fastener closed, from folded edge to folded edge at the base of the armhole. Measure the 1/2 sweep, with the slide fastener closed, from folded edge to folded edge 1 inch above the bottom edge. Measure the 1/2 yoke, at the joining back seam, from armhole seam to armhole seam, and divide by two. Measure the back length, at the center back, from the base of the undercollar seam to the edge of the bottom. Measure the sleeve length, along the underarm seam, from the armhole seam to the bottom edge of the cuff. Measure the collar length, with the collar in the flat position, at the base of the collar seam joining the neck from finished neck seam to the other finished end. Measure the cuff length from the finished edge of the point to the other finished end.

3.7 Workmanship. The jacket shall be constructed in a thoroughly workmanlike manner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE V. Finished measurements.

Size of Jacket	Finished Measurements in Inches 1/ 2/						
	1/2 Bust	1/2 Sweep	1/2 Yoke	Back Length	Sleeve Length	Collar Length	Cuff Length
Short							
6	21-1/4	18-1/4	7-1/2	21-3/4	17	16-3/4	8-1/2
8	21-3/4	18-3/4	7-1/2	21-3/4	17-1/8	17-1/4	9
10	22-1/4	19-1/4	7-1/2	21-3/4	17-1/4	17-3/4	9-1/2
12	22-3/4	19-3/4	7-3/4	21-3/4	17-3/8	18-1/4	10
14	23-1/2	20-1/2	8	22	17-1/2	18-3/4	10-1/2
16	24-1/4	20-1/2	8-1/4	22	17-5/8	19-1/4	11
18	25	20-1/2	8-1/2	22	17-3/4	19-3/4	11-1/2
Regular							
6	21-1/4	18-1/4	7-1/2	22-3/4	18	16-3/4	8-1/2
8	21-3/4	18-3/4	7-1/2	22-3/4	18-1/8	17-1/4	9
10	22-1/4	19-1/4	7-1/2	22-3/4	18-1/4	17-3/4	9-1/2
12	22-3/4	19-3/4	7-3/4	22-3/4	18-3/8	18-1/4	10
14	23-1/2	20-1/2	8	23	18-1/2	18-3/4	10-1/2
16	24-1/4	20-1/2	8-1/4	23	18-5/8	19-1/4	11
18	25	20-1/2	8-1/2	23	18-3/4	19-3/4	11-1/2
20	26	21-1/2	8-3/4	23	18-7/8	20-1/4	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE V. Finished measurements. - Continued

Finished Measurements in Inches 1/ 2/							
Size of Jacket	1/2 Bust	1/2 Sweep	1/2 Yoke	Back Length	Sleeve Length	Collar Length	Cuff Length
Long							
6	21-1/4	18-1/4	7-1/2	23-3/4	19	16-3/4	8-1/2
8	21-3/4	18-3/4	7-1/2	23-3/4	19-1/8	17-1/4	9
10	22-1/4	19-1/4	7-1/2	23-3/4	19-1/4	17-3/4	9-1/2
12	22-3/4	19-3/4	7-3/4	23-3/4	19-3/8	18-1/4	10
14	23-1/2	20-1/2	8	24	19-1/2	18-3/4	10-1/2
16	24-1/4	20-1/2	8-1/4	24	19-5/8	19-1/4	11
18	25	20-1/2	8-1/2	24	19-3/4	19-3/4	11-1/2

1/ The finished measurements shall be taken as specified in 3.6.
2/ The tolerances shall be plus or minus 1/2 inch for the 1/2 bust, the 1/2 sweep, the back length, and the sleeve length; plus 1/4 inch or minus 1/8 inch for the collar length, and plus or minus 1/4 inch for the 1/2 yoke and the cuff length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection

4.2.1 Materials and components. Unless otherwise specified (see 6.2), the materials and the components of the jacket shall be examined and tested in accordance with all of the applicable subsidiary documents referenced herein to the extent applicable and in accordance with table VI. The sample unit for the examinations and tests of the lining material specified in table VI shall be 3-1/2 yards full width of the nylon taffeta cloth. The sample unit for the examinations and tests of the basic fabric specified in table VI, except for the fiber content and the nonfibrous content, shall be 5 continuous yards full width of the basic fabric after it has been treated for water resistance. The sample unit for the examinations and tests of the basic fabric for fiber content and nonfibrous content specified in table VI shall be 1/2 yard full width of the basic fabric before it has been treated for water resistance. The sample size for the examinations and tests specified in table VI shall be as specified in table VII. If one or more sample units fail to meet any specified requirement, the lot shall be rejected. A certificate of compliance will be accepted for the requirements that all metal components of the slide fastener shall be furnished from one supplier (see 3.1.3).

4.2.2 End item. The end item shall be examined for defects as specified in 4.2.2.1 and 4.2.2.2. The sample unit for the examination shall be one jacket.

4.2.2.1 Visual examination. The end item shall be visually examined for defects. Except for the defects with an asterisk in the classification column, the defects found during this visual examination shall be classified as specified in tables VIII and IX. Defects with an asterisk in the classification column shall be classified as major defects if the defects seriously affect appearance or serviceability and as minor A defects if the defects affect appearance and serviceability but not seriously. The inspection level for this visual examination shall be II of MIL-STD-105. The acceptable quality level for this visual examination shall be 2.5 defects per 100 units (dhu) for major defects, 15.0 dhu for major and minor A (combined) defects, and 40.0 dhu for total (major and minor A and B combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VI. Testing of materials and components.

Characteristics	Test Methods of FED-STD-191
Basic fabric (see 3.1.1 and table I)	
Polyester fiber identification	see 4.3.1
Fiber content of untreated cloth	see 4.3.2
Nonfibrous content of untreated cloth	2611
Yarn ply	1/
Weave	1/
Color	1/
Sulfur content	2020
Colorfastness	
Light	5660
Crocking	5651
Perspiration	5680
Laundering	5610
Wet dry cleaning	5622
Weight	5041
Number of yarns	5050
Breaking strength	5100
Tearing strength	5132
Seam efficienty	5110
Dimensional stability	5556
Water extract (pH value)	2811
Water resistance under hydrostatic pressure	
Initial	5514
After three launderings	5514 2/
After one dry clearing	5508 and 5514

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VI. Testing of materials and components. - Continued

Characteristics	Test Methods of FED-STD-191
Water resistance under dynamic conditions	
Initial	5500
After three launderings	5500 2/
Spray rating of water resistance	
Initial	5526 3/
After one dry cleaning	5508 3/
Lining (see 3.1.2 and table II)	
Denier	4/
Filaments	1/ 4/
Nylon identification	1530
Melting point	1534
Color	1/
Weave	1/
Weight	5041
Yarns per inch (texture)	5050
Breaking strength	5100
Tear strength	5134
Shrinkage	5552

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VI. Testing of materials and components - Continued

Characteristics	Test Methods of FED-STD-191
Colorfastness	
Laundering	5/
Perspiration	5680
Crocking	5651
Nonfibrous content	2611

1/ The test method shall be visual inspection. One determination per sample unit shall be made.
2/ Prior to this test the specimens shall be subjected to three complete wash and dry cycles in accordance with 5556 (cotton laundering procedure) of FED-STD-191.
3/ Three determinations per sample unit of the initial spray rating shall be equal to or better than 100, 100, and 90. Three determinations per sample unit of the spray rating after one dry cleaning shall be equal to or better than 80, 80, and 70.
4/ A certificate of compliance for this requirement shall be furnished.
5/ The test method shall be 5610 (three cycles) of FED-STD-191. The specimens shall be dried after each of the three cycles of laundering. Only the stain on the nylon fibers of the color transfer cloth shall be evaluated for color transfer cloth evaluation.

TAVLE VII. Sample size.

Lot Size	Sample Size
800 or less	2
801 to 22,000 inclusive	3
22,001 or more	5

4.2.2.2 Examination of finished measurements. The end item shall be examined for conformance to the finished measurements specified herein. The inspection level for this examination of the finished measurements shall be S-3 of MIL-STD-105. The acceptable quality level for this examination of the finished measurements shall be 4.0 dhu for defects (one class). Any finished measurement that deviates from the finished measurements specified herein or sleeve lengths of the jacket uneven 1/2 inch or more shall be classified as a finished measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. General defects.

Defect	Major	Minor A	Minor B
Material defects and workmanship damage 1/			
Any hole	*		
Any weakening defect such as smash, multiple float, or loose slub that might develop into hole	*		
Shade bar or unsightly slub on outside of jacket	*		
Shade bar or unsightly slub on inside of jacket (except sleeve linings)		X	
Shade bar or unsightly slub on sleeve linings			X
Needle chews that might develop into hole	*		
Scissor or knife cut, tear, mend, pull, snag, or burn	*		
One or more exposed drill holes	*		
Shaded parts			
Any shaded parts on outside of jacket	*		
Any lining parts on inside of jacket, except sleeve linings and back yoke, badly shaded		X	
Back yoke badly shaded			X
Any sleeve lining parts badly shaded		X	
Cleanness			
Any spot or stain clearly noticeable on outside of jacket		X	
Any spot or stain clearly noticeable on inside of jacket			X
One or more bastings not removed			X
Thread ends not trimmed throughout major portion of jacket or two or more shade tickets not removed			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. General defects. - Continued

Defect	Major	Minor A	Minor B
Component and assembly			
Any defective component or defect of assembly (not classified herein)	*		
Any component or required operation omitted (not classified herein)	*		
Any component not cut in accordance with direction lines on patterns or specified requirements	*		
Bartacks			
One bartack missing, insecure, or misplaced not serving intended purpose			X
Two bartacks missing, insecure, or misplaced not serving intended purpose		X	
Three or more bartacks missing, insecure, or misplaced not serving intended purpose	X		
Any bartack not specified length or more than two stitches less than specified number			X
Seams and stitchings			
Seam twisted, puckered, or pleated	*		
Part of jacket caught in any unrelated operation or stitching	*		
Thread(s) used on outside of jacket not same shade or not satisfactorily matching shade of jacket		X	
Thread breaks or ends of stitching (if not caught in other seams or stitchings) not securely backtacked		X	
Looper thread of stitch type 401 exposed on outside of jacket		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. General defects. - Continued

Defect	Major	Minor A	Minor B
Gage of stitching (edge, top, or raise stitching) irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance		X	
Gage of stitching (edge, top, or raise stitching) not within range of gage specified or varying more than 1/16 inch if range is not specified			X
Open seam over 1/8 inch but not over 1/4 inch 2/			X
Open seam over 1/4 inch 2/		X	
Stitches skipped or broken more than 1/4 inch but not more than 1/2 inch (on edge, top, or raise stitching when seam is seamed, turned, and stitched) 2/			X
Stitches skipped or broken more than 1/2 inch (on edge, top, or raise stitching when seam is seamed, turned, and stitched) 2/		X	
Raw edges more than 1/8 inch but not more than 1/4 inch on outside of jacket 3/			X
Raw edges more than 1/4 inch on outside of jacket 3/		X	
Raw edges more than 1/2 inch but not more than 1 inch on inside of jacket 3/			X
Raw edges more than 1 inch on inside of jacket 3/		X	
Run offs more than 1/2 inch but not more than 1 inch on edge, top, or raise stitching if not resulting in open seam (outside only) 4/			X
Run offs more than 1 inch on edge, top, or raise stitching if not resulting in open seam (outside only) 4/		X	
Seam or stitch not specified type		X	
Loose tension resulting in loose seam	X		

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. General defects. - Continued

Defect	Major	Minor A	Minor B
Loose tension on edge, top, or raise stitching recognized by loosely exposed loops of top or lower thread		X	
Tight tension 5/			
Stitches per inch on major portion of jacket one or two less than specified			X
Stitches per inch on major portion of jacket three less than specified		X	
Stitches per inch on major portion of jacket four or more less than specified	X		
Stitches per inch on major portion of jacket more than specified			X
Buttonholes			
One or more buttonholes omitted	X		
Buttonhole too small, not permitting button to enter buttonhole	X		
Buttonhole too large, i.e., 3/8 inch or more longer than diameter of button		X	
Buttonhole stitching not securely caught in fabric, causing stitching to pull away from fabric	X		
One or more broken stitches in one buttonhole			X
One or more broken stitches in two or more buttonholes		X	
Buttonhole with ragged edges, affecting appearance			X
Buttonhole not specified type or uncut buttonhole		X	
One or two stitches per buttonhole less than specified			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. General defects. - Continued

Defect	Major	Minor A	Minor B
Three or four stitches per buttonhole less than specified		X	
Five or more stitches per buttonhole less than specified	X		
Buttons			
One or more buttons defective, missing, loose, or blistered		X	
Buttons not specified type, size, or finish		X	

1/ If the condition of the material defects or the workmanship damages is nonweakening and inconspicuous and has a negligible effect on serviceability, the material defects or the workmanship damages shall not be classified as defects. If the condition of the material defects or the workmanship damages is definitely weakening and conspicuously located, the material defects or the workmanship damages shall be classified as specified herein.
2/ A break in a line of stitching or continuous skipped or run-off stitches (except on edge, top, or raise stitching) shall be classified as an open seam.
3/ A raw edge shall be classified as such when it occurs along an edge required to be turned under but the edge is securely caught in the stitching. If the edge is not securely caught in the stitching, it shall be classified as an open seam.
4/ Run offs on joining seams, if resulting in an open seam, shall be classified as open seams.
5/ Puckering is evidence of tight tension. If puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of the seam or stitching. Tight tension shall be classified as an open seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE IX. Defects applicable to specific parts

Defect	Major	Minor A	Minor B
Bust darts			
One or both front bust darts omitted	X		
Bust darts uneven in length by 1/2 inch or more			X
Bust darts not pressed flat with folded edge toward bottom of jacket			X
Bust dart not properly tapered			X
Bottom hem			
Jacket puckered, twisted, or pleated by stitching forming bottom hem		X	
Width of finished bottom hem less than 3/4 inch or more than 1 inch			X
Elastic tape twisted, affecting smoothness on bottom hem		X	
Elastic tape omitted		X	
Back yoke			
Hem badly twisted on bottom of back yoke			X
Back pleat of back yoke omitted		X	
Back yoke twisted, not affecting smoothness on outside surface of jacket			X
Collar			
Collar tight at joining to neck seam causing puckers or pleats on fronts, back, or facings		X	
Collar edge irregular		X	
Collar points poorly shaped or not uniform shape or size		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE IX. Defects applicable to specific parts. - Continued

Defect	Major	Minor A	Minor B
Topcollar tight, i.e., causing edge of collar to curl or bulging on undercollar		X	
Topcollar badly twisted, puckered, or full		X	
Interlining tight or twisted causing puckers on undercollar		X	
Finished width of collar at center back less than 2-1/8 inches or more than 2-3/8 inches			X
Cuffs			
Cuff full or twisted, affecting appearance		X	
Cuff interlining full or twisted, not affecting smoothness on outside part of cuff			X
Cuff reversed, i.e., buttonhole on underside and button on top side	X		
One or both buttons out of alignment with buttonhole, causing bottom of finished cuffs to be uneven 1/4 inch or more when buttoned		X	
First button less than 1 inch or more than 1-1/4 inches from square end of cuff			X
Second button less than 1-1/4 inches or more than 1-1/2 inches from first button			X
Front end of buttonhole less than 5/8 or more than 7/8 inch from pointed end of cuff			X
Cuff interlining omitted	X		
Elastic tape omitted at sleeve bottom		X	
Hanger			
Hanger omitted or ends of hanger not securely caught in collar		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE IX. Defects applicable to specific parts. - Continued

Defect	Major	Minor A	Minor B
Opening of finished hanger less than 2-1/8 inches or more than 2-3/8 inches			X
Width of hanger less than 1/4 inch or more than 1/2 inch			X
Hanger off center 1 inch or more with center of collar			X
Label			
Label missing or size marking omitted, incorrect, or illegible	X		
Information (except size) missing, incorrect, or illegible			X
Label not stitched on four sides to patch pocket			X
Label not stitched in right location			X
Slash pockets			
Left and right slash pockets not in corresponding diagonal position, affecting appearance		*	
Slash pockets 1/2 inch or more out of alignment		X	
Length of slash pocket opening less than 6 inches or more than 6-1/2 inches		X	
Width of top welt less than 3/4 inch or more than 1 inch		X	
Width of inside welt less than 3/8 inch or more than 5/8 inch			X
Sleeves			
Sleeve sagging, twisted, bulging, or short caused by shortness, tightness, or lining not correctly positioned		*	

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:44Z
Check the source to verify that this is the current version before use.

TABLE IX. Defects applicable to specific parts. - Continued

Defect	Major	Minor A	Minor B
Sleeve fullness misplaced or concentrated in one area		X	
Sleeve lining too long, causing lining to sag at bottom		X	
Side seams, fronts, and front closure			
Length of closed fronts uneven at neck 1/4 inch or more or at bottom 1/4 inch or more		X	
Back overlapping front at side seams			X
Slide fastener tape set on too loosely or too tightly causing excessive bulging on opening, affecting appearance open or closed		X	
Slide fastener not specified type, size, or style or any part of assembly omitted, bent, or broken	X		
Slide fastener exposed more than 1/16 inch or gapping more than 1/16 inch when closed		X	
Jacket part stitched too close to metal chain not permitting slider to pass	X		
Top end of slide fastener chain more than 3/4 inch from raw edge of neckline			X
Top end of slide fastener chain less than 1/2 inch from raw edge of neckline			X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:44Z
Check the source to verify that this is the current version before use.

4.2.3 Examination of preparation for delivery. Shipping containers fully prepared for delivery shall be examined, for the defects listed in table X, to determine conformance to packaging, packing, and marking requirements. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 of MIL-STD-105. The acceptable quality level shall be 2.5 dhu.

TABLE X. Defects applicable to preparation for delivery

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application
Materials	Any component missing
	Any component not as specified or damaged, not serving intended purpose
Workmanship	Inadequate application of components such as incomplete closure of case liners or container flaps, loose strapping, or inadequate stapling
	Bulging or distortion of containers
Content	Number of intermediate packages per container more or less than required
	Size shown on one or more jackets not as specified on container 1/

1/ One package from each container in the sample shall be examined for this defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

4.3 Test methods

4.3.1 Polyester fiber identification. This is a visual qualitative test. The polyester fibers shall be tested in each of the following solvents: acetone (boiling), 70 percent sulfuric acid, 5 percent sodium hydroxide (boiling), and methylene chloride (boiling). Unless otherwise specified herein, each of the solvents shall be at room temperature. The quantity of each reagent shall be 100 times more than the polyester fibers tested. The fibers shall be placed in each of the solvents for 10 minutes and stirred intermittently. The polyester filament shall be insoluble in each of the solvents.

4.3.1.1 Methylene chloride. The methylene chloride shall be prepared by mixing nine parts reagent methylene chloride with one part Unites States Pharmacopoecia (95 percent) ethyl alcohol. The methylene chloride solution is extremely toxic; therefore, provisions for adequate ventilation or the use of a fume hood is recommended.

4.3.2 Fiber content of untreated cloth. Two specimens from each sample unit shall be tested in accordance with the general procedure specified in test method 2100 or FED-STD-191. The average percent of polyester in the two specimens and the average percent of cotton in the two specimens shall be reported to the nearest 0.1 percent. The following method shall be used to calculate the fiber content.

$$\text{Percent polyester} = \frac{\text{Weight of residual fiber X 100}}{\text{Weight of dry desized specimen}}$$

Percent cotton = 100 percent - percent polyester

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each jacket shall be folded in accordance with good commercial practice. The folded jacket shall be placed in a box conforming to type CF, class domestic, style RSC, minimum bursting strength 200 pounds per square inch of PPP-B-636. The box shall be closed with tape conforming to PPP-T-45.

5.1.2 Level C. Level C packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice provided it meets the requirements specified for level C packaging.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:44Z
Check the source to verify that this is the currentversion before use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Four jackets of one size and packaged as specified shall be packed in a box that is constructed, closed, and reinforced to conform to type CF or SF, class weather-resistant, grade V3c or V3s, style RSC of PPP-B-636. Toward the end of the contract or if the quantity of jackets of the same size is less than the quantity required per box, mixed size (see 5.3.1) may be packed within the same box.

5.2.2 Level B. Level B packing shall be as specified in 5.2.1 except that the box shall conform to style RSC, class domestic of PPP-B-636.

5.2.3 Level C. Jackets packaged as specified shall be packed to insure acceptance by the carrier and safe delivery to destination at the lowest transportation rate for such supplies. The containers shall be in accordance with the rules or regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Mixed sizes. Each shipping container packed with mixed sizes (see 5.2.1) shall have white paper labels, 5 inches by 4 inches in size, securely attached to the end and side. The words "mixed sizes" shall be plainly printed on the labels. Under these words, the sizes and quantities of each size of jackets contained therein shall be legibly printed.

6. NOTES

6.1 Intended use. The jacket covered by this specification is intended to be worn by female personnel of the Department of the Air Force.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Size required (see 1.2)

(c) Government furnished patterns (see 3.4)

(d) Waiver of requirements for testing materials and components and requirements for certificate of compliance (see 4.2.1)

(e) Selection of applicable levels of preservation and packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

6.3 Color samples. Color samples can be obtained from the procuring activity or as directed by the contracting officer.

6.4 Figure. Figure 1 show general design of the jacket and is furnished for information only. In the event of conflict between this figure and the text of this specification, the text of this specification shall govern.

Custodian:
Air Force - 11

Reviewer:
Air Force - 99

Preparing activity:
Air Force - 11

Project No. 8410-F323

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in *submitting comments and suggestions* for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFWAL/MLSE
Wright-Patterson AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:44Z
Check the source to verify that this is the current version before use.