MILITARY SPECIFICATION

MICROSCOPE, OPTICAL, MONOCULAR, HAND-HELD, PORTABLE, MILITARIZED, 200X MAGNIFICATION, FOR FIELD INSPECTION OF OPTICAL FIBERS


This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification describes a monocular, focusable, compact, portable, light-weight, militarized, hand-held, 200X magnification microscope with an integral through the lens (vertical) illumination system for use in the visual inspection and examination of terminated or cleaved end of optical fiber in field applications.

1.2 Classification.

1.2.1 Military part number. The military part number shall consist of the letter "M", the basic number of the specification and an assigned dash number (see 3.1), as shown in the following:

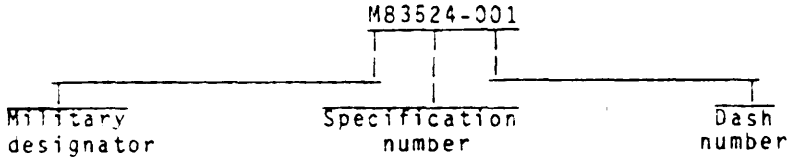

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-A-250/1	-	Aluminum Alloy 1100, Plate and Sheet.
QQ-A-250/2	-	Aluminum Alloy 3003, Plate and Sheet.
QQ-A-250/4	-	Aluminum Alloy 2024, Plate and Sheet.
QQ-A-250/8	-	Aluminum Alloy 5052, Plate and Sheet.
QQ-A-250/11	-	Aluminum Alloy 6061, Plate and Sheet.
QQ-A-250/12	-	Aluminum Alloy 7075, Plate and Sheet.
QQ-B-626	-	Brass, Leaded and Non-Leaded, Rod, Shapes, Forgings, and Flat Product with Finished Edges (Bar and Strip).
QQ-B-750	-	Bronze, Phosphor, Bar, Plate, Rod, Sheet, Strip, Flat Wire, and Structural and Special Shaped Sections.
QQ-C-530	-	Copper-Beryllium Alloy Bar, Rod, and Wire (Copper Alloy Numbers 172 and 173).
QQ-P-35	-	Passivation Treatment for Austenitic, Ferritic, and Martensitic Corrosion-Resisting Steel (Fastening Devices).
QQ-S-763	-	Steel Bar Wire, Shapes, and Forging, Corrosion Resisting.
QQ-S-766	-	Steel Plates, Sheets and Strip-Corrosion Resisting.
QQ-S-781	-	Strapping, Steel, and Seals.
QQ-W-321	-	Wire, Copper Alloy.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Air Force Acquisition Logistics Division, Electronic Support Division AFLC, 2750 ABW/ES, Gentile AF Station, Ohio 45444 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6650

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Pin connections

PPP-B-601 - Boxes, Wood, Cleated Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Boxes, Shipping, Fiberboard.

MILITARY

MIL-M-14 - Molding Plastics and Molded Plastic Parts, Thermosetting.
MIL-P-116 - Preservation, Methods of.
MIL-C-5541 - Chemical Conversion Coatings on Aluminum and Aluminum Alloys.
MIL-F-14072 - Finishes for Ground Electronic Equipment.
MIL-C-14550 - Copper Plating (Electrodeposited).
MIL-I-17214 - Indicator, Permeability; Low-Mu (Go-No-Go).
MIL-M-24519 - Molding Plastics, Polyester Thermoplastic.
MIL-P-46174 - Plastic Molding Material, Polyphenylene Sulfide, Glass Fiber Reinforced.
DOD-C-85045 - Cable, Fiber Optics, General Specification For (Metric).

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking For Shipment and Storage.
MIL-STD-147 - Palletized Unit Loads.
MIL-STD-150 - Photographic Lenses.
MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
MIL-STD-454 - Standard General Requirements for Electronic Equipment.
MIL-STD-810 - Environmental Test Methods.
MIL-STD-889 - Dissimilar Metals.
MIL-STD-1285 - Marking of Electrical and Electronic Parts.
MIL-STD-45662 - Calibration Systems Requirements.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 484 - General Requirements for Stainless and Heat Resisting Wrought Steel Products (Except Wire).

ASTM A 582 - Free-Machining Stainless and Heat-Resisting Steel Bars, Hot Rolled or Cold Finished.

ASTM D 3951 - Packaging, Commercial.

(Applications for copies should be addressed to the American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The microscope shall be a monocular, focusable, compact, militarized, portable, light-weight, hand-held instrument. The microscope shall have an optical system capable of providing a magnification of 200X with an integral through the lens (vertical) illumination system.

3.2 First article. Microscopes furnished under this specification shall be products which have been tested and have passed the first article inspection specified (see 4.5 and 6.3).

3.3 Materials. Materials shall be as specified herein. However, when a definite material is not specified, a material shall be used which will enable the microscopes to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product.

3.3.1 Metal. Unless otherwise specified (see 6.2), metal parts shall be aluminum, brass, steel, or copper.

3.3.2 Glass. Glass shall be of optical quality and free from striae, strain, bubbles, pits, scratches or other visible defects producing distortion of magnified images viewed through the lens system. The glass shall contain no radioactive material.

3.4 Design and construction. The microscope, shall consist of an interchangeable widefield eyepiece capable of accepting a reticle, a compact lightweight housing incorporating within it a battery operated through-the-lens (vertical) illumination system capable of being used in a hand-held position; an integral back illumination system to allow fiber to be viewed with light passing through fiber; an integral focusing mechanism, a quick-change mechanism to allow adapter with connector attached to be connected and removed quickly and easily. Standard objective should be easy to interchange with other objectives in the field. The overall dimensions of the microscope shall not exceed 11 by 9 by 3 inches and the shape of the housing shall be such that while in use, the operator can stabilize both elbows against his/her body while viewing the fiber. The weight of the microscope shall be not more than 2 pounds. On-off switch may be push-button momentary type. The microscope shall be provided with a set of operating instructions.

3.4.1 Housing. The housing of the microscope shall be made of a rugged, durable and lightweight plastic, or metal that will house the optical tube, vertical illumination system, batteries, focusing mechanism, on-off switch, and illumination port. The configuration of the housing shall be such that it provides comfortable convenient use when held in a single hand. The housing shall be capable of accepting a lanyard or of such a design that it may be inserted into a belt-type holster.

3.4.2 Optical tube. The optical tube of the microscope shall be militarized in design and shall accept on opposite ends an eyepiece and objective, and shall provide mounting for the focusing and illumination systems.

3.4.3 Lens system. The lenses shall be precision-ground glass providing 200X total magnification. Both the eyepiece and objective lenses shall be contained in metal mounts threaded to fit each end of the tube. The widefield eyepiece shall be capable of accepting reticles fixed in a position to insure the scale on the reticle is in focus when the specimen image is in focus.

3.4.3.1 Lens filter. The microscope shall be designed such that it provides optical radiation protection for the user while viewing active emitting fibers. The protection shall consist of an attenuation filter placed permanently within the optical train of the microscope. Radiation in the wavelength range of 700 to 1400 nanometers (nm) shall be attenuated by at least a factor of 100 (minimum optical density of 2.0). Also, the filter shall not interfere with the normal function of the microscope, thus the filter shall be nearly neutral in appearance and offer at least 50 percent visual transmittance in the 400 to 600 nm wavelength range.

3.4.4 Illumination system. The illuminator shall provide illumination of the specimen by at least two of the methods shown below:

a. Through-the-lens, vertical illumination only.

b. Back illumination of the fiber optic only.

c. Oblique illumination of the fiber when the fiber is viewed other than perpendicular to the optical axis.

d. Simultaneous through the lens (vertical) illumination and back illumination of the fiber.

The illuminator shall be contained within the microscope housing and shall be operated with not more than two batteries (a remote ac power supply is optional) energizing a 1.10 to 1.20 watt lamp. The illumination system must be designed to minimize back reflections in the optical lens system. Battery and lamp replacement shall be accomplished without tools.

3.4.5 Adapters. Optical fiber adapters shall allow simple insertion and removal of bare fiber which conforms to the dimensions of fibers specified in DOD-C-85045, shall be capable of being held firmly in a fixed position, shall be positioned such that the fiber is held parallel to the optical axis and shall provide a means to rotate or otherwise move the fiber in an X-Y direction throughout the field.

3.4.6 Focusing mechanism. The focusing mechanism of the microscope shall be designed to insure that all correctly mounted fibers are capable of being brought into focus. The focusing actuator must be convenient for left- and right-hand operation.

3.4.7 Lanyard or belt-type holster. A lanyard or a belt-type holster shall be provided. The lanyard shall be not less than 30 inches or more than 34 inches in total length. The material shall be a woven nylon webbing vinyl coated fabric or comparable material that will insure safety of the instrument when attached to such instrument. The belt-type holster must allow easy insertion and removal of the microscope into the holster. The material shall be leather or a sturdy, weather resistant synthetic.

3.4.8 Threaded parts. All threaded parts shall be in accordance with FED-STD-H28. Where practicable, all threads shall be in conformity with the coarse-thread series. The fine-thread series shall be used only for applications that might show a definite advantage through their use.

3.4.8.1 Engagement of threaded parts. All threaded parts shall engage by at least two full threads.

3.5 Performance characteristics.

3.5.1 Optical resolution. When tested as specified in 4.7.2, the lens system shall resolve not less than 750 lines per millimeter.

3.5.2 Thermal shock. When tested in accordance with 4.7.3, there shall be no damage detrimental to the operation of the samples.

3.5.3 Moisture resistance. When tested in accordance with 4.7.4, there shall be no deterioration of the samples detrimental to their operation.

3.5.4 Salt spray. When tested in accordance with 4.7.5, there shall be no sign of corrosion of the metal parts after the test.

3.5.5 Vibration. When tested in accordance with 4.7.6, there shall be no damage detrimental to the operation of the samples.

3.5.6 Shock. When tested in accordance with 4.7.7, there shall be no damage detrimental to the operation of the samples.

3.6 Identification marking. The microscope shall be identified in accordance with MIL-STD-1285.

3.6.1 Safety warning. The microscope shall have a warning label as follows: "CAUTION: Viewing of laser actuated fiber cable may cause eye damage." The label shall be placed in a conspicuous place on the microscope.

3.7 Workmanship. All parts, components, and assemblies of the microscope shall be clean and free from dust, dirt, or other harmful extraneous material. All exposed edges shall be rounded or beveled. There shall be no evidence of damaged or bent parts or assemblies.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Test equipment and inspection facilities. The contractor shall establish and maintain a calibration system in accordance with MIL-STD-45662.

4.2 Classification of inspection. The inspections specified herein are classified as follows:

a. Components inspection (see 4.4).

b. First article inspection (see 4.5).

c. Quality conformance inspection (see 4.6).

4.3 Inspection conditions.

4.3.1 Conditions. Unless otherwise specified herein, all inspections shall be performed in accordance with the test conditions specified in the "GENERAL REQUIREMENTS" of MIL-STD-202.

4.4 Components and materials inspection. Components and materials inspection shall consist of certification supported by verifying inspection and test data that the components listed in table I, used in fabricating the microscope, are in accordance with the applicable referenced specification.

TABLE I. Components and materials inspection.

Component material	Requirement paragraph	Applicable specification
Plastic, molded materials- - - -	3.3.4	MIL-M-14, MIL-M-24519, or MIL-P-46174
Copper alloys		
Phosphor bronze- - - - - - - -	3.3.5	QQ-B-750
Brass (leaded and nonleaded) -	3.3.5	QQ-B-626
Aluminum - - - - - - - - - - - -	3.3.6	QQ-A-250/1, /2, /4, /8, /11 and /12; MIL-F-14072
Corrosion-resistant steel- - - -	3.3.7	QQ-P-35, QQ-S-763, QQ-S-766, ASTM A 582, and ASTM A 484
Dissimilar metals- - - - - - - -	3.3.9	MIL-STD-889
Fungus resistance- - - - - - - -	3.3.10	MIL-STD-454

4.5 First article inspection. First article inspection shall be performed by the contractor after award of contract and prior to production, at a location acceptable to the Government. First article inspection shall be performed on sample units which have been produced with equipment and procedures normally used in production. First article approval is valid only on the contract or purchase order under which it is granted, unless extended by the Government to other contracts or purchase orders.

4.5.1 Sample size. Two microscopes shall be subjected to first article inspection.

4.5.2 Inspection routine. The sample shall be subjected to the inspections specified in table II in the order shown.

4.5.3 Failures. Any failure shall be cause for refusal to grant first article approval. Battery failure shall not be cause for rejection.

TABLE II. First article inspection.

Inspection	Requirements paragraph	Test paragraph
Visual and mechanical inspection - -	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1
Visual resolving power - - - - - - -	3.5.1	4.7.2
Thermal shock- - - - - - - - - - - -	3.5.2	4.7.3
Moisture resistance- - - - - - - - -	3.5.3	4.7.4
Salt spray - - - - - - - - - - - - -	3.5.4	4.7.5
Vibration- - - - - - - - - - - - - -	3.5.5	4.7.6
Shock- - - - - - - - - - - - - - - -	3.5.6	4.7.7
Visual resolving power - - - - - - -	3.5.1	4.7.2
Visual and mechanical inspection - -	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1

4.6 Quality conformance inspection.

4.6.1 Inspection of product for delivery. Inspection of product for delivery shall consist of the inspections specified in table III in the order shown.

TABLE III. Quality conformance.

Inspection	Requirement paragraph	Test method paragraph	AQL (percent defective)
Visual resolving power	3.5.1	4.7.2	100% inspection
Visual and Mechanical	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1	2.5

4.6.1.1 Inspection lot. An inspection lot shall consist of all microscopes produced under essentially the same conditions and offered for inspection at the same time.

4.6.1.2 Sampling plan.

4.6.1.2.1 Visual resolving power inspection. The inspection shall be performed on 100 percent of the product supplied under this specification. Any microscope that fails shall be removed from the lot and not charged as a failure.

4.6.1.2.2 Visual and mechanical inspection. Statistical sampling and inspection shall be in accordance with MIL-STD-105 for general inspection level II. The acceptable quality level (AQL) shall be 2.5 percent defective.

4.6.1.2.2.1 Rejected lots. If an inspection lot is rejected, the manufacturer may rework it to correct the defects, or screen out the defective units, and resubmit for reinspection. Resubmitted lots shall be inspected using 100 percent inspection. Such lots shall be separate from new lots, and shall be clearly identified as reinspected lots.

4.7 Methods of inspection.

4.7.1 Visual and mechanical inspection. Samples shall be inspected to verify that the dimensions, materials, design, construction, marking, and workmanship are in accordance with the applicable requirements (see 3.1, 3.3, 3.4, 3.6, and 3.7).

4.7.2 Visual resolving power. The microscope shall be tested for visual resolving power as follows: View a high contrast resolution target through the microscope, using procedures specified in MIL-STD-150. Resolution of less than 700 per millimeter shall constitute failure of this test.

4.7.3 Thermal shock. Samples shall be tested in accordance with method 107, test condition A of MIL-STD-202, (except temperature shall be -40°C to +71°C.) Following the test, the samples shall meet the requirements of 3.5.2.

4.7.4 Moisture resistance. Samples shall be tested in accordance with method 106 of MIL-STD-202, omitting steps 7a and 7b. A 24-hour drying period is permitted with the eyepiece and objective removed. Following the test, the samples shall meet the requirements of 3.5.3.

4.7.5 Salt spray. Samples shall be tested in accordance with method 101, test condition B of MIL-STD-202. A 24-hour drying period is permitted with the eyepiece and objective removed. Following the test, the samples shall meet the requirements of 3.5.4.

4.7.6 Vibration. Samples shall be tested in accordance with method 204, test condition D of MIL-STD-202. Following the test, the samples shall meet the requirements of 3.5.5.

4.7.7 Shock. Samples shall be tested in accordance with method 213, test condition I of MIL-STD-202. Following the test, the samples shall meet the requirements of 3.5.6.

4.8 Inspection of packaging. Except when industrial packaging is specified, the sampling and inspection of the preservation and interior package marking shall be in accordance with the group A and B quality conformance inspection requirements of MIL-P-116. The sampling and inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129. The inspection of industrial packaging shall be as specified in the contract (see 6.2).

5. PACKAGING

5.1 Preservation. Preservation shall be levels A, B, or industrial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. The microscope shall be cleaned in accordance with MIL-P-116, process C-1.

5.1.1.2 Drying. The microscope shall be dried in accordance with MIL-P-116.

5.1.1.3 Preservative application. Preservatives shall not be used.

5.1.1.4 Unit packs. The microscope shall be unit packed one each in accordance with submethod IIc of MIL-P-116 insuring compliance with the applicable requirements of that specification. Each unit pack shall be placed in a supplementary container conforming to PPP-B-636, class weather resistant.

5.1.1.5 Intermediate packs. Intermediate packs are not required.

5.1.2 Level B. The requirements for level B shall be as specified for level A except that submethod IA-8 of MIL-P-116 shall be used as the method of preservation.

5.1.3 Industrial. The industrial preservation of the microscope shall be in accordance with the requirements of ASTM 3951-82.

5.2 Packing. Packing shall be level A, B, or industrial, as specified (see 6.2).

5.2.1 Level A. The microscope, preserved as specified in 5.1, shall be packed in wood containers conforming to PPP-B-601, overseas type or PPP-B-621, class 2. Closure and strapping shall be in accordance with the applicable container specification except that metal strapping shall conform to QQ-S-781, type I, finish A.

5.2.2 Level B. The microscope, preserved as specified in 5.1, shall be packed in fiberboard containers conforming to PPP-B-636, class weather resistant, style optional, special requirements. The requirements for box closure, waterproofing and reinforcing shall be in accordance with method V of the PPP-B-636 appendix.

5.2.3 Industrial. The industrial packing of the microscope shall be in accordance with the requirements of ASTM 3951-82.

5.2.4 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination equal 40 cubic feet or more. Quantities less than 40 cubic feet need not be unitized. Unitized loads shall be uniform in size and quantities to the greatest extent practicable.

5.2.4.1 Level A. The microscope, packed as specified in 5.2.1, shall be unitized on pallets in conformance with the MIL-STD-147; load type I, with a wood cap (storage aid 5) positioned over each load.

5.2.4.2 Level B. The microscope, packed as specified in 5.2.2, shall be unitized as specified in 5.2.4.1 except that weather resistant fiberboard caps (storage aid 4) shall be used in lieu of wood caps.

5.2.4.3 Industrial. Unitization is not required for industrial packing.

5.3 Marking.

5.3.1 Levels A and B. In addition to any special or other identification marking required by the contract (see 6.2), each unit, supplementary and exterior container and unitized load shall be marked in accordance with MIL-STD-129. The complete military or contractor's type or part number, as applicable (including the FSCM), shall be marked on all unit and supplementary packs in accordance with the identification marking provisions of MIL-STD-129.

5.3.2 Industrial. Industrial marking shall be in accordance with ASTM 3951-82.

5.4 General.

5.4.1 Exterior containers. Exterior containers (see 5.2.1, 5.2.2 and 5.2.3) shall be of a minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.8.

6. NOTES

6.1 Intended use. This microscope is intended for use as a portable visual inspection instrument used for the examination of terminated and/or cleaved ends of optical fibers field applications.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Time frame required for submission of first-produced microscope, and number of microscopes required (see 3.2).

c. When metal shall be other than as specified (see 3.3.1).

d. Inspection of industrial packaging (see 4.8).

e. Levels of preservation and packing required (see 5.1 and 5.2).

f. If special or additional identification marking is required (see 5.3.1).

6.2.2 Replacement parts. Microscopes provided under this specification are functionally interchangeable, but may not be physically interchangeable.

6.3 First article microscope. When a first article inspection is required, the item will be tested and should be a first production item. The first article should consist of two units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, and test approval of the documents first article. Any changes or deviations of production microscopes from the approved first article microscope during production will be subject to the approval of the contracting officer. Approval of the first article microscope will not relieve the contractor of this obligation to furnish microscopes conforming to this specification.

6.4 Conditions for use of level B preservation. When level B preservation is specified (see 5.1.2), this degree of protection should be used for microscope under known favorable conditions during transportation, storage and handling.

6.5 Definitions. The definitions used herein are defined as follows:

Strain: In optics, the mechanical tension, compression or shear in optical glass due to internal stress caused by improper cooling or annealing during manufacture of the glass or the subsequent working of molded parts.

Striae: An imperfection in optical glass consisting of a distinct streak of transparent material having a slightly different refractive index from the body of glass; it is caused by improper mixing of ingredients during manufacture.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Preparing activity:
Air Force - 85

(Project 6650-F127)

Review activities:
Army - MI, AR, AT, GL
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AV
Navy - MC, YD
Air Force - 19

Agent:
DLA - ES

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Air Force Acquisition Logistics Division
Electronic Support Division AFLC
2750 ABW/ES
Gentile AF Station, OH 45444

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-83524	Microscope, Optical, Monocular, Hand-Held, Portable,.....

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.