MIL-S-83200E(USAF)
4 February 1983
SUPERSEDING
MIL-S-83200A(USAF)
16 July 1974

MILITARY SPECIFICATION

SHIRT, WOMAN'S, POLYESTER-COTTON (DURABLE PRESS), BLUE 1550

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a woman's shirt, polyester-cotton (durable press), blue 1550.

1.2 Sizes. The shirt shall be furnished in the following sizes as specified (see 6.2):

Short	6	8	10	12	14	16	18	
Regular	6	8	10	12	14	16	18	20
Long	6	8	10	12	14	16	18	

2. APPLICABLE DOCUMENTS

* 2.1 Government documents

* 2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

V-B-871	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-276	Thread, Cotton
DDD-L-20	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-676	Boxes, Setup

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENESS, Wright-Patterson AFB, OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

Military

MIL-B-17757	Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-T-43548	Thread, Polyester, Cotton-Covered
MIL-C-43594	Cloth, Interlining, Polyester
MIL-C-43847	Cloth, Plain Weave, Polyester/Cotton, Precured, Durable Press
MIL-C-83314	Cloth, Broadcloth, Polyester/Cotton, (Durable Press)

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government publications. The following other Government publications form a part of this specification to the extent specified herein.

The Color Association of the United States, Inc.

Department of Defense (DOD) Standard Shades for Buttons 1966

DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Copies of these documents can be obtained from the The Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

2.1.3 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

American Society for Testing and Materials (ASTM)

ASTM B 117 Method of Salt Spray (Fog) Testing

(Copies of this document can be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

The American Association of Textile Chemists and Colorists (AATCC)

Technical Manual of the AATCC

(Copies of this manual can be obtained from The American Association of Textile Chemists and Colorists, Research Triangle Park, Post Office Box 886, Durham, North Carolina 27702.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the National Motor Freight Traffic, Tariff Order Section, 1616 P St., N.W., Washington DC 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries and are also distributed among technical groups and using federal agencies.)

* 2.1.4 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials

3.1.1 Basic material. The basic material of the shirt shall conform to MIL-C-83314.

3.1.2 Tie tab. The material for the tie tab shall conform to MIL-C-43843 and shall be blue conforming to USAF color shade No. 1569 (see 6.3).

3.1.3 Snap fasteners. The snap fasteners for attaching the tie tab to the shirt shall be dress snap fasteners, sewing hole size 2-0, round or square, and silver colored.

3.1.4 Buttons. The buttons for the front closure and shoulder loops shall conform to type II, class K, style 25, size 19 line of V-B-871. The color of the buttons shall be DOD Button Shade White BA, cable No. 62031 (See DOD Standard Shades for Buttons 1966).

3.1.5 Thread. Unless otherwise specified herein, the thread for sewing shall conform to ticket No. 70, 2 ply of MIL-T-43548. As an option, thread conforming to type IA2, ticket No. 40, 6 ply of V-T-276 may be used for buttonholes. The thread for all blindstitching shall be clear polyester monofilament thread having a melting point of not less than 485 degrees Fahrenheit and conforming to HTG Sew Klear (R) size 10, or equal, manufactured by the Synthetic Thread Company, Inc., 825 Twelfth Avenue, Bethlehem, Pennsylvania (see 4.2.1.2). Except for the thread used for stitching the tie tab and the thread used for blindstitching, the thread shall be DOD Thread Shade Light Blue O, cable No. 66029 (see DOD Standard Color Card of Official Standardized Shades for Sewing Thread 1968). The thread used for stitching the tie tab shall be DOD Thread Shade Blue AR, cable No. 66058. The dyed thread shall have colorfastness to light and laundering equal to or better than the standard sample. If a standard sample is not available, the dyed thread shall have good colorfastness to light and laundering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

* 3.1.6 Interlining cloth. The material for interlining the shoulder loops shall conform to MIL-C-43594.

3.2 Design. The shirt shall have shoulder loops that button, a fly front, 5-button closure, rounded Peter Pan collar, short sleeves, and notched hem at the front seams and the back darts. Each shirt shall be furnished with a crescent-shaped, detachable tie tab that will snap to the front under the collar.

3.3 Construction. The shirt shall be constructed in accordance with table I; however, the manufacturer is not required to follow the exact sequence of operations as listed therein, unless otherwise specified. Any additional basting or holding stitching may be used, provided the thread is removed or does not show on the finished shirt.

3.3.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types shall conform to FED-STD-751. The stitches per inch specified in table I shall be interpreted to be the minimum and maximum permitted. Wherever two or more methods of seams or stitchings are given for the same part of an operation, any one of them may be used. The looper (under thread) of stitch type 401 shall be on the inside of the shirt. Edge stitching and top stitching shall be uniformly gaged throughout the shirt. The guides and knives on machines producing stitch types 515, 516, 517, 518, and 519 shall be set to trim only the raveled ends of the fabric. If a knife is used on the overedging machine, only the raveled ends shall be trimmed off; the edge of the fabric shall not be cut off. The trimming shall not exceed 1/16 inch. Seam allowances shall be maintained. Seams shall be sewn so that there will be no raw edges, run-offs, twists, pleats, or puckers. The following practices to avoid puckering and to produce the flattest seams possible shall be given consideration by the manufacturer of the shirt. The needle should be the smallest size possible with a slim point. The smallest throat plate hole possible shall be used to prevent flagging. Pressure on the pressure foot should be just enough to insure a steady flow of material. The feed dogs should contain 18 to 20 teeth per inch for normal sewing and 20 to 25 teeth per inch for stitching down. All attachments should be as smooth as possible to permit free flowing of the material through the machine. The lightest possible thread tensions, while maintaining a good stitch, should be used. The upper and lower threads shall be balanced. Checks to insure that blunt needles are eliminated and that machine adjustments are maintained should be made frequently.

3.3.1.1 Thread breaks and ends of seams. If not caught in other seams or stitching, the ends of all seams and stitching produced with stitch type 301 shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. The ends of a continuous row of stitching shall be overlapped not less than 1/2 inch.

3.4 Patterns. When specified by the procuring activity (see 6.2), standard patterns will be furnished by the Government. Unless otherwise indicated, the standard patterns will provide an allowance of 3/8 inch for all joining seams. The standard patterns will provide an allowance of 1/4 inch for the collar and the tab joining seams and for the outer edge of the collar. The standard patterns shall not be altered in any way. The standard patterns are to be used only as a guide for making the supplier's working patterns which shall be identical to the standard patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1	Cut parts (a) The cloth shall be carefully laid up in uniform lengths and widths where possible. Care shall be taken in spreading the material so that plies are not stretched or full and so that one side of the lay is even. (b) Cut the shirt in strict accordance with the patterns which show size, shape, warp directional line for pattern lay, and notches for proper assembling of all parts. Except for the under-collar, the collar interlining, and the right front fly-facing, cut all parts of the shirt of one piece of cloth. The undercollar under ply of shoulder loops, the collar interlining, and the right front fly-facing may be cut from ends. If the undercollar under ply of shoulder loops, the collar interlining, and the right front fly-facing are cut from ends, they shall approximate the shade of the shirt. Cut the tie tab in accordance with the patterns and from the cloth specified. (c) Mark each part in the top ply of the main lay with the size of the shirt. Cut the tie tab in accordance with the patterns and from the cloth specified.			
2	Replace defective or damaged parts (a) Replace at the time of cutting any part containing holes or seriously weakening defects such as smashes, multiple floats, or slubs.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(b) Replace any part damaged during the manufacturing process by needle chews, tears, holes, mends, burns, or drill holes.			
3	Shade mark parts			
	(a) Mark or ticket all parts to insure a uniform shade throughout the shirt and the proper assembling of all parts. If shade marking is used, the marking shall not show through and be visible on the outside of the shirt.			
4	Make collar			
	(a) Join the outer edges of the three plies of the basic material (the topcollar, the undercollar, and the collar interlining). Trim the seam allowance to 1/8 inch at the curved edge; turn, and work out the edges and the rounded corners. The undercollar shall not be exposed beyond the edge of the topcollar, and the corners shall be uniform in shape. Raise stitch the undercollar through the seam allowance within 1-1/2 inches of the corners.	301 301	SSa-1 LSq-2	8-10 8-12
	(b) Press the edges of the collar smooth and flat with a heated pressing iron.			
5	Make tie tab			
	(a) Join together with a 1/4-inch gage, the three plies of the tie tab by seaming around all outer edges except one end. Clip the point and the corner, turn, and force out the edges and the corners.	301	SSa-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(b) Fold in the raw edges of the open end 1/4 inch; stitch by machine or fell by hand 1/16 to 1/8 inch from the folded edges.	301 or hand	SSc-1	10-14 6-8
	(c) Press the tie tab smooth and flat with a heated pressing iron.			
6	Make bust darts			
	(a) Fold and stitch the bust darts on the fronts below the armhole, tapering to nothing 1/2 inch beyond the drill hole. The darts shall finish on the inside, with the folded edge toward the armhole of the shirt.	301	OSf-1	10-14
	(b) Press the bust darts smooth and flat with a heated pressing iron.			
	(c) Fold and stitch the shoulder darts on the back tapering to nothing 1/2 inch beyond the drill hole. The shoulder dart shall finish on the inside with folded edge turned toward the center back.	301	OSf-1	10-14
	(d) Press the shoulder darts smooth and flat with a heated pressing iron.			
7	Overedge stitch bottom			
	(a) Overedge stitch the bottom raw edges of the front, the side fronts, and the backs.	503 or 504	EFd-1	9-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
8	Join side fronts to fronts. The side front shall be joined to the front, forming a 1-3/4 inch notch opening in the bottom hem.			
	(a) Fold the hem of the front face to face in accordance with the notches, and stitch with a 3/8-inch seam allowance from the folded edge up to the first notch; continue stitching across the seam to the raw edge. Clip the seam allowance diagonally upward to the stitched corners; turn and force out the corners and the edges.	301	SSa-1	10-14
	(b) Fold up the side front bottom hem face to face according to the notches, join the front to the side front with a 3/8-inch seam to the bottom folded edge of the front catching the top of the side front hem in the stitching, forming a slit opening at the bottom.	301	SSa-1	10-14
	(c) Overedge stitch the raw edges together. OR	503 or 504	EFd-1	9-11
	(d) The front and the side front may be seamed and the edge of the seam allowance overedged continuously in one operation. OR	515 or 516 or 517 or 518	SSa-2	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(e) Turn the hem to the underside, forcing out the corners and the seam line to the edge at the sides of the hem notch. Press the seam flat and toward the back with a heated pressing iron.			
9	Make back waist darts. The back waist darts shall be sewn with a 1-3/4-inch slit formed in the bottom hem.			
	(a) Fold up the hem of the back at the edge of the dart adjacent to the side seam face to face in accordance with the pattern notches, and stitch with a 3/8-inch seam from the bottom folded edge up to the first notch; continue the stitching across the seam allowance to the raw edge. Clip the seam allowance diagonally upward to the stitched corner, turn and force out the corner and the edges.	301	SSa-1	10-14
	(b) Fold the waist dart; fold the remaining back hem face to face, and stitch with a 3/8-inch seam from the bottom tapering to nothing 1/2 inch above the drill hole at the top of the dart catching the top of the hem at the side dart adjacent to the side seam in the stitching.	301	SSa-1 or OSf-1	10-14
	(c) Overedge stitch the cut edges of the dart together.	503 or 504	EFd-1	9-11
	(d) Turn and force out the corner and the edges.			
	(e) Press the darts toward the center back with a heated pressing iron.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
10	Join shoulder seam			
	(a) Seam the back to the front with a 3/8-inch seam.	301	SSa-1	10-14
	(b) Overedge stitch the raw edges together.	503 or 504	EFd-1	9-11
	NOTE: The seam shall be folded toward the back in the finished shirt.			
	OR			
	(c) The shoulder seam may be stitched and overedged in one operation.	515 or 516 or 519	SSa-2	10-14
	(d) Press the shoulder seam smooth and flat with a heated pressing iron.			
11	Make fly front			
	(a) Fold the front fly-facing piece in accordance with the pattern marks.			
*	(b) Locate and make five, vertical, straight, cut, purl-type buttonholes barred on each end in accordance with the marks on the pattern. The buttonhole edge shall be 9/16 inch (±1/16 inch) from the folded front edge. The buttonhole opening shall be 1/2 inch (±1/16 inch) in length. The purl side of the buttonhole shall face toward the outside of the shirt.	304 or 101 (zig zag)		52 stitches per buttonhole

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(c) Position the front fly-facing on the outside of the right front facing-interlining so that the back edges are even. Stitch 1/8 inch from the raw neck (gorge) and the bottom edge of the facing-fly to the front from the folded front edge of the fly-facing at the neck to the shoulder edge and to the back of the facing and at the bottom.	301	SSa-1	10-14
	(d) Overedge stitch the shoulder and the back edge raw edges of the front fly-facing piece and the right facing-interlining together.	503 or 504	EFd-1	9-11
	(e) Overedge stitch the shoulder and the back raw edges of the left facing.	503 or 504	EFd-1	9-11
	(f) Securely tack the folded edge of the fly through the grown-on facing of the right front only, between the buttonholes, in four places. The four tacks shall be vertical and shall be 1/8 inch from the folded edge and centered between the buttonholes.	hand or 301		7 stitches minimum per tack
12	Attach labels			
	(a) Position the left end of the instruction label approximately 4 inches upward from the finished bottom of the shirt with the bottom edge parallel to and 1/2 to 3/4 inch from the back edge of the fly-facing. Sew the instruction label on all four sides, to the fly-facing part only, 1/8-inch gage from the edge of the instruction label.	301	LSb-1	8-12

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the currentversion before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(b) Apply the marking of the combination identification and size label in the same location specified for the instruction label except that the combination identification and size label shall be on the left front facing.			
13	Close facing at bottom			
	(a) Fold the facing for the left front and fly-facing and interlining on the right front to the outside of the shirt. Stitch across the bottom in line with the hem fold line indicated on the patterns from folded edge to the back edge of the facing on the left front and the facing interlining-fly facing on the right front.	301	SSa-1 and SSbd-1	10-14
	(b) Raise stitch along the bottom of the left and the right facings through the bottom hem 1/16 to 3/16 inch from the seam, starting at the back edge of the facing for a distance of approximately 1-1/2 inches.	301	LSq-2(b)	10-14
14	Set collar			
	(a) Fold the front facing for the left front and the fly-facing and the interlining on the right front to the outside of the shirt as indicated by the notches on the patterns; insert the collar ends between the fronts and the facing at the notch indicated for the step. Stitch from the fold at the front to 3/8 to 1/2 inch forward of the shoulder edge of the facing, catching the neck edge of the left front facing and	301	SSa-1	10-14

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	right front fly-facing and interlining in the stitching. Continue stitching the free end of the neck edge of the left facing and the right fly-facing and interlining and undercollar to the neck edge across the back.			
	(b) Turn the facings to the inside. Work out the corners and the top edge along the step so that the seam line is at the edge and the underside is not exposed on the outside. Turn under the unsewn portion of the topcollar 3/16 inch, and stitch 1/16 to 1/8 inch from the folded edge of the topcollar through the undercollar joining seam allowance and the undercollar. The undercollar joining seam stitching shall not be exposed below the edge of the topcollar. NOTE: The opening between the front edges of the collar shall be 3/4 to 7/8 inch when the finished shirt is buttoned.	301 or 401	LScf-2(b)	10-14
	(c) Stitch the top edge of the facing to the shoulder seam allowance only not less than 3/4 inch from the back edge of the facing.	301	SSa-1	10-14
* 15	Make and attach shoulder loops			
	(a) Join the three plies of each shoulder loop along the sides and the point with a 1/4-inch seam.	301 or 401	SSa-1	10-14
	(b) Turn each shoulder loop. Work out the edges and the point. Press the shoulder loops flat with a heated pressing iron.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches per Inch
	(c) Locate and make a horizontal straight cut purl-type buttonhole barred one each end, in accordance with the pattern marks, in each shoulder loop. The end of the buttonhole shall be 1/2 inch (±1/8 inch) from the pointed edge of the shoulder loop. The buttonhole opening shall be 1/2 inch (±1/16 inch) long. The purl side of the buttonhole shall face toward the outside of the shoulder loop.	304 or 101 zig zag)		52 stitches per buttonhole
	(d) Trim and measure the shoulder loops to fit the shoulders and match with the shirt. Center the shoulder loops on the shoulder seams so that the pointed end will extend to within 3/8 to 1/4 inch of the collar seam. Stitch each shoulder loop to the shirt 1/16 to 3/16 inch from the armhole edge. The shoulder loops will be paired. They will be attached by sewing left and right shoulder loop to corresponding shoulder.	301	SSa-1	10-14
16	Join sleeves to armholes			
*	(a) Seam the sleeves to the armholes with a 3/8-inch seam, catching the shoulder loops in the stitching and matching the notches as indicated on the patterns, with the fullness at the sleeve head worked in evenly.	301	SSa-1	10-14
	(b) Overedge stitch the raw edges together, catching the shoulder seam outlet.	503 or 504	EFd-1	9-11
	OR			

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	(c) The seam joining the armholes and the sleeves may be stitched and the edge of the seam allowance finished in one operation.	515 or 516 or 517 or 518	SSa-2	10-14
17	Join fronts to backs at sides			
	(a) Join the underarm sleeve and the side seams continuously. The ends of the armhole seam shall be turned against the sleeve. The armhole seam line on the front and the back at the side seam shall be aligned.	301	SSa-1	10-14
	(b) Overedge stitch the raw edges together.	503 or 504	EFd-1	9-11
	OR			
	(c) The underarm sleeve and the side seams may be stitched and the edge of the seam allowance finished continuously in one operation. The ends of the armhole seam shall be turned against the sleeve. The ends of the armhole seam line at the side seam line shall be aligned.	515 or 516 or 517 or 518	SSa-2	10-14
	(d) Press the seams flat and toward the back with a heated pressing iron.			
	NOTE No. 17 shall be performed prior to No. 18.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
18	Hem sleeves			
	(a) Turn up the bottom of the sleeve as indicated by the notches on the patterns, with the raw edge turned in 1/2 inch single stitch 1/16 inch from the top edge, through the sleeve, forming a hem 1-3/8 inches (±1/8 inch) wide, with the underarm sleeve seam turned toward the back.	301	EFb-1	10-12
19	Hem bottom			
	(a) Turn up the bottom of the shirt as indicated by the notches on the patterns; blindstitch at the top edge, forming a hem 2-3/8 inches (±1/8 inch) wide with the side and side front seams toward the back and the back waist darts toward the center back. Either continue the blindstitch or stitch and skip stitch blindstitch the back edge of the facing approximately 1-1/4 inches.	103 or 301 or 306	EF1-1	6-8
20	Topstitch right front			
	(a) Topstitch 1-3/16 to 1-5/16 inches from the folded edge of the right front through all plies from the finished neck edge to the finished bottom edge. The folded edge of the fly-facing shall not be exposed beyond the folded edge of the right front.	301		10-14

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
21	Sew on buttons			
	(a) Sew five buttons on the left front, with the centers of the buttons 5/8 to 3/4 inch from the edge, through the left front facing. The buttons shall be securely sewn and aligned with the centers of the corresponding buttonholes in the front of the shirt.	301 or 101		14-16 stitches per button 20-22 stitches per button
22	Attach snap fasteners			
	(a) Sew the studs of the size 2 - 0 snap fasteners to the underside of each end of the tie tab through all plies of material. The studs shall be located so that, when the shirt is buttoned and the snap fasteners are fastened, the collar will lie smooth without distortion, the tie tab will be centered under the collar ends at the neck. The tie tab will finish evenly with top edge of the plait, and the point of the tie tab will be in the center of the plait.	101 or 104		21-24 stitches per stud 14-16 stitches per stud
	(b) Sew the sockets of the 2 - 0 snap fasteners, through the fronts and the facings, on each front under the collar to correspond with the studs on the tie tab.	101 or 301		21-24 stitches per socket 14-16 stitches per socket

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
23	Clean shirt (a) All ends of thread shall be trimmed, and loose threads shall be removed from the shirt.			
24	Press shirt (a) In lieu of the pressing performed after the various joining operations, the entire shirt may be pressed at this time. (b) Press the shirt with a heated iron at a permanent press (moderate) setting as follows: (1) Press the underarm seams, the side seams, the armholes, the bust darts, the back darts, the shoulder darts, the bottom hem, sleeves, the side fronts, the shoulder seams, and the front edges. (2) Touch-up the shirt before folding it for packaging. NOTE: A steam inflated bag type pressing machine shall not be used to press the shirt. The hot head pressing machine specified herein shall be a hot head pressing machine that is equipped with controls for accurate temperature (350 - 370 degrees Fahrenheit), time (minimum of 10 seconds with 3 seconds for steam and 7 seconds for bake and vacuum), and pressure. (c) Button the shirt. Attach the tie tab to the shirt. Fold the shirt.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

3.4.1 Pattern parts. The shirt shall be cut from the materials and in accordance with the pattern parts specified in table II.

* TABLE II. Pattern parts.

Material	Pattern Parts	Parts Cut
Basic material (see 3.1.1)	Front and facing interlining	2
	Side front	2
	Back	1
	Sleeve	2
	Topcollar	1
	Undercollar	1
	Front facing and fly	1
	Collar interlining	1
	Shoulder loop	4
Polyester-cotton cloth (see 3.1.2)	Tie tab	3
* Interlining cloth (see 3.1.6)	Shoulder loop interlining	2

3.5 Finished measurements. The finished measurements of the shirt shall conform to table III. The finished measurements shall be taken as follows: Take the measurement of the 1/2 bust, with the shirt buttoned, from folded edge to folded edge at the base of the armhole. Take the measurement of the collar, end to end, along the neck seam line. Take the measurement of the back length, at the center back, from the collar seam to the bottom of the shirt. Take the measurement of the sleeve length, along the center of the sleeve, from the armhole at the seam line at the highest point in the sleeve head to the bottom of the sleeve.

* 3.6 Labels. Each shirt shall have a combination indentification and size label and an instruction label. All the labels shall have colorfastness to laundering as specified in DDD-L-20. The combination identification and size label shall conform to type IV, classes I and 2 of DDD-L-20. The instruction label shall conform to type I, class 3 of DDD-L-20.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

The instruction label shall contain the following information:

1. For machine washing, use wash and wear cycle. Wash with moderately hot water (120° F), using soap or mild detergent.

2. For hand washing, wash in moderately hot water(120° F), using soap or mild detergent. Do NOT wring or twist.

3. Dry in tumble dryer at hot setting. Remove immediately at end of drying. Shape and hang.

4. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touch up is required, iron at a moderate heat setting.

DO NOT REMOVE THIS LABEL

TABLE III. Finished measurements.

Finished Measurements in Inches 1/ 2/

Size of Shirt	1/2 Bust	Back Length	Sleeve Length	Collar
Short				
6	18-1/2	19	8	13-1/4
8	19	19-1/4	8-1/8	13-1/2
10	19-1/2	19-1/2	8-1/4	13-3/4
12	20	19-3/4	8-3/8	14
14	20-3/4	20	8-1/2	14-1/2
16	21-1/2	20-1/4	8-5/8	15
18	22-1/2	20-1/2	8-3/4	15-3/8
Regular				
6	18-1/2	20	8-1/4	13-1/4
8	19	20-1/4	8-3/8	13-1/2
10	19-1/2	20-1/2	8-1/2	13-3/4
12	20	20-3/4	8-5/8	14
14	20-3/4	21	8-3/4	14-1/2
16	21-1/2	21-1/4	8-7/8	15
18	22-1/2	21-1/2	9	15-3/8
20	23-1/4	21-3/4	9-1/8	15-7/8
Long				
6	18-1/2	21	8-3/4	13-1/4
8	19	21-1/4	8-7/8	13-1/2
10	19-1/2	21-1/2	9	13-3/4
12	20	21-3/4	9-1/8	14
14	20-3/4	22	9-1/4	14-1/2
16	21-1/2	22-1/4	9-3/8	15
18	22-1/2	22-1/2	9-1/2	15-3/8

1/ The finished measurements shall be taken as specified in 3.5.
2/ The tolerance shall be ±3/8 inch for the 1/2 bust and ±1/4 inch for the back length, the sleeve length, and the collar.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

* 3.7 End item appearance. After the shirt has been laundered five times, the seam appearance of the finished shirt shall have a seam and stitching appearance rating of not less than 3.0 in each of the following stitched areas: collar, shoulder, armholes, sleeve hems, shoulder darts, bust darts, bottom hem, side fronts, fronts, underarm seams, side seams, shoulder loops, and back darts. The average overall rating of all of these stitched areas of the finished shirt shall be not less than 3.5.

3.8 Workmanship. The shirt shall be constructed in a thoroughly workmanlike manner.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection

4.2.1 Materials and components. Unless otherwise specified herein or by the procuring activity (see 6.2), materials and components shall be inspected in accordance with the applicable requirements of the documents referenced herein. In addition to the inspection provisions in the documents referenced herein, the inspection specified in table IV shall be performed.

TABLE IV. Inspection of components.

Characteristics	Test Method 1/
Snap fasteners (see 3.1.3)	
Type	visual
Size	standard commercial
Color	visual
Salt spray	ASTM B 117 2/

1/ One determination for each characteristic shall be made per sample unit. The test results shall be recorded as pass or fail.
2/ A 5 percent sodium chloride solution shall be used, and the time of exposure shall be 24 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

4.2.1.1 Sampling for inspection. Unless otherwise specified in the documents referenced herein, the sample size for the inspection of materials and components shall conform to table V. The lot size for the snap fasteners shall be 1,000 snap fasteners. The sample unit for the snap fasteners shall be 15 snap fasteners. If one or more sample units fail to meet any inspection requirement, the lot represented shall be rejected.

TABLE V. Sample size.

Lot Size	Sample Size
800 or less	2
801 or 22,000 inclusive	3
22,001 or more	5

4.2.1.2 Certificate or compliance. If a certificate of compliance is furnished for any requirements specified herein, the procuring activity will reserve the right to check test the items covered by the certificate of compliance to determine the validity of the certification. A certificate of compliance will be acceptable for the requirements of the clear polyester monofilament thread specified in 3.1.5.

4.2.2 End item. The end item shall be examined for defects as specified in 4.2.2.1 and 4.2.2.2. The sample unit for these examinations shall be one shirt.

4.2.2.1 Visual examination. The end item shall be visually examined for defects. Except for the defects with an asterisk (*) in the classification column, the defects found during the visual examination shall be classified as specified in table VI and VII. Except as otherwise specified herein for material defects and workmanship damages, a defect with an asterisk in the classification column shall be classified a major defect if the defect affects appearance or serviceability but not seriously. The inspection level for this visual examination shall be III of MIL-STD-105. The acceptable quality level for this visual examination shall be 1.5 defects per 100 units (dhu) for major defects, 6.5 dhu for major and minor A (combined) defects and 15.0 dhu for total (major and minor A and B combined) defects.

4.2.2.2 Examination of finished measurements. The end item shall be examined for conformance to the finished measurements specified in table III. The inspection level for this examination of the finished measurements shall be S-3 of MIL-STD-105. The acceptable quality level for this examination of the finished measurements shall be 4.0 dhu for defects (one class). Any finished measurement of the shirt deviating from the finished measurements specified in table III or sleeve lengths of the shirt uneven by 1/2 inch or more shall be classified as a finished measurement defect.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

4.2.3 Testing of end item. The end item shall be tested, as specified in 4.4.1 and 4.4.2 to determine compliance with the requirements specified in 3.7. All requirements shall be applicable to the sample unit. The sample unit shall be one finished shirt. The sample size shall be as specified in table V. One shirt shall be used to evaluate all appearance requirements. If one or more sample units fail to meet any of the special requirements, the lot shall not be acceptable.

4.2.4 Examination of preparation for delivery. Shipping containers fully prepared for delivery shall be examined for the defects listed in table VIII to determine conformance to preservation and packaging, packing, and marking requirements. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 of MIL-STD-105. The acceptable quality level shall be 2.5 dhu.

4.3 Test equipment. The washing and drying equipment, the lighting equipment, and the photographic standards for single needle stitching used for the tests and evaluations specified in 4.4.1 and 4.4.2 shall be as described in AATCC Test Method 888-B-1970 (see Technical Manual of the AATCC). The ballast specified in 4.4.1 shall consist of durable press shirts that are approximately the same weight as the test shirts or of 3-feet-square hemmed pieces of durable press fabric that is similar to the fabric of the test shirts.

* 4.4 Test methods

* 4.4.1 Laundering and conditioning. If the shirts selected as test samples will weigh less than 4 pounds, ballast to make up a standard 4-pound load shall be added to the test shirts. The front of each shirt in the 4-pound load shall be unbuttoned. The 4-pound load shall be placed in the washing machine. Ninety grams of AATCC Standard Detergent 124 shall also be placed in the washing machine. The washing machine shall be set for 12 minutes on the hot wash and wear cycle, high water level. The washing machine shall be filled with water from a water source set at 140 $\pm 5^{\circ}$F. Immediately after the washing machine has completed the final spin cycle, the entire load shall be removed, untangled, and placed in the dryer. The dryer shall be operated at a temperature of 140 to 160°F until the entire load is dry. After the entire load has been dried, the entire load shall be tumbled for 5 minutes in the dryer with the heat turned off (cool-down cycle). Immediately after the tumbling is completed, the entire load shall be removed from the dryer. The preceding wash, dry, and tumble cycle shall be repeated until the entire load has been subjected to five complete wash, dry, and tumble cycles. After completion of the fifth cycle, the test shirts shall be conditioned for 2 hours at 70 $\pm 1^{\circ}$F and at a relative humidity of 50 to 65 percent. (Note: During the interruption between the cycles and during the conditioning and the evaluations, the test shirts shall be placed on wooden or plastic hangers and shall be buttoned at the front.)

4.4.2 Evaluation. After the test shirts have been laundered and conditioned as specified herein, the test shirts shall be evaluated by three trained observers. Each of the trained observers, independent of the other observers, shall evaluate each of the test shirts as follows: The hanger upon which the test shirt has been placed shall be suspended on the viewing board so that the test shirt will lie flat on the surface of the viewing board. The photographic standards for single needle stitching shall be placed on the viewing board. The observer shall stand directly in front but 4 feet from the test shirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VI. General defects.

Defect	Major	Minor A	Minor B
Material defect and damage			
Any hole, cut, tear, smash, burn, drill hole 1/			
Any scorched area, multiple float, or open place 1/			
On outside (longest dimension in any direction)			
Up to an including 1/8 inch		X	
More than 1/8 inch	X		
On inside (longest dimension in any direction)			
Up to and including 1/4 inch			X
More than 1/4 inch		X	
Knot or slub on outside 2/			
Knot larger than C or a slub larger than D outside the shirt	X		
Knot larger than B, or slub larger than C in collar	X		
Knot larger than D, or a slub larger than E in outside area of shirt			X
Misweave, area of no dye penetration, dye streak, missing yarn, broken yarn, visible mend, thin place, or shade bar, on outside 3/	X		
Loose yarn, snagged thread, coarse yarn, or woven in waste 3/		X	
Embedded crease of a permanent nature in cloth	X		
Needle chew on outside (largest dimensions in any direction)			
Up to and including 1/2 inch		X	
More than 1/2 inch	X		
Shaded parts			
Any shading within or between outside parts		4/	
Any part cut from ends, badly shaded			X
Cleanness			
Any spot or stain on outside, clearly noticeable		4/	
Any spot or stain on inside, clearly noticeable			X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VI. General defects. - Continued

Defect	Major	Minor A	Minor B
Thread ends not trimmed or loose thread ends or one or more shade tickets (if used) not removed throughout shirt			X
Components, assembly, and cutting			
Any defective component		4/	
Any component omitted		4/	
Any required operation omitted or improperly performed		4/	
Any part not cut in accordance with warp directional lines on pattern or specification requirements	X		
Seams and stitchings			
Any part of shirt caught in unrelated operation or stitching		4/	
Seams twisted, puckered, or pleated, affecting appearance (unless otherwise classified herein)		X	
Thread breaks or ends of all stitching, if not caught in other seams or stitching, not backtacked as specified		X	
Shade(s) of thread used on outside not satisfactorily matching shade of shirt		X	
Irregular gage of stitching on edge or raise stitching or turned under edges, i.e., unevenly gaged or corresponding stitching not uniformly gaged, affecting appearance		X	
Gage of stitching on edge or raise stitching or turned under edges not within range specified or varying more than 1/16 inch if range is not specified			X
Open seam on joining seam more than 1/8 inch but not more than 1/4 inch 5/			X
Open seam on joining seam more than 1/4 inch but not more than 1 inch 5/			X
Open seam on joining seam more than 1 inch 5/	X		
* Open seam on sleeve hem more than 1/4 inch 5/			X
Open seam on felling of bottom more than 3/4 inch 5/			X
Raw edge on outside more than 1/8 inch but not more than 1/4 inch 6/			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VI. General defects. - Continued

Defect	Major	Minor A	Minor B
Raw edge on outside more than 1/4 inch but not more than 3/4 inch 6/		X	
Raw edge on outside more than 3/4 inch 6/	X		
Raw edge on inside exclusive of overedged edges more than 1/2 inch but not more than 2 inches 6/			X
Raw edge on inside exclusive or overedged edges more than 2 inches		X	
Raw edge on overedged edge more than 1 inch but not more than 3 inches 6/			X
Raw edge on overedged edge more than 3 inches 6/		X	
Run-offs on raise, top, or edge stitching if not resulting in open seam (outside only) more than 1/2 inch but not more than 1 inch 5/			X
Run-offs on raise, top, or edge stitching if not resulting in open seam (outside only) more than 1 inch 5/		X	
Seam not specified type		X	
Stitch not specified type		X	
Loose tension resulting in loose seam	X		
Loose tension on raise, top, or edge stitching, i.e., loosely exposed loops of lower or top thread		X	
Tight tension (stitches break when normal strain is applied to seam or stitching) 7/	X		
Stitches per inch one stitch less than minimum on all seams, except stitching of labels or seams that are later raised, top, or edge stitched 8/			X
Stitches per inch two stitches less than minimum on all seams, except stitching of labels or seams that are later raised, top, or edge stitched 8/		X	
Stitches per inch three or more stitches less than minimum on all seams except stitching of labels or seams that are later raised, top, or edge stitched 8/	X		
Stitches per inch two or more stitches less than minimum on stitching of labels or seams that are later raised, top, or edge stitched 8/			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VI. General defects. - Continued

Defect	Major	Minor A	Minor B
Any number of stitches in excess of maximum stitches per inch specified 8/			X
Stitches skipped or broken 1/4 inch or more but not more than 1/2 inch on raise, top, or edge stitching if stitching is not joining seam			X
Stitches skipped or broken more than 1/2 inch on raise, top, or edge stitching if stitching is not joining seam		X	
Buttonholes, buttons, and snap fasteners			
Buttonhole stitching not securely caught in fabric, causing stitching to pull away from fabric	X		
More than two skipped stitches in one or more buttonholes		X	
One or more broken stitches in one buttonhole		X	
One or more broken stitches in two or more buttonholes	X		
Inadequate bar or insecure tacking of one buttonhole			X
Inadequate bar or insecure tacking of two or more buttonholes		X	
Very ragged edges on buttonhole(s), incomplete stitching, or uncut		X	
Buttonhole not specified type		X	
Buttonhole(s) poorly constructed (unless otherwise classified herein)		X	
Buttonhole(s) not corresponding to size of button(s) so that they do not button properly		X	
One button missing, insecurely sewn or tacked, or broken or defective			X
Two or more buttons missing, insecurely sewn or tacked, or broken or defective		X	
One snap fastener part missing, insecurely sewn or tacked, or broken or defective			X
Two or more snap fastener parts missing, insecurely sewn or tacked, or broken or defective		X	
Any button or snap fastener not specified size, type, or color		X	

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VI. General defects. - Continued

Defect	Major	Minor A	Minor B
Pressing			
Shirt burned or scorched	X		
Pressing omitted	X		
Shirt poorly pressed or partly pressed 9/		X	

1/ Drill hole: This defect should not be scored when visible on the inside of the shirt, provided that the component as attached to the outside of the shirt fully covers the drill hole.
2/ For these defects, use the Sears fabric defect scale which is available from Sears, Roebuck and Co., Dept 7330, "Sears Defect Replica Kit", Sears Tower, Chicago, IL 60684.
3/ These defects shall not be scored on undercollars, inside of the sleeve hem, or inside of the fly front.
4/ See 4.2.2.1.
5/ A break in a line of stitching or continuous skipped or run-off stitches, except on edge or raise stitching, or run-offs on a joining seam, if resulting in an open seam, shall be classified as an open seam.
6/ A raw edge shall be classified as such if overedging is omitted where required or if it occurs along an edge required to be turned under but the edge is securely caught in the stitching, the condition shall be classified as an open seam.
7/ Puckering is evidence of tight tension. If puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of the seam or stitching.
8/ Stitches per inch shall be classified as a defect only if the condition exists on the major portion of a seam.
9/ Wrinkles or creases caused by packaging shall not be classified as defects.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VII. Detailed defect applicables to specific parts.

Defect	Major	Minor A	Minor B
Outside of shirt			
* Collar			
Topcollar twisted or tight, causing edges to curl up	*		
Collar edges crooked		X	
Rounded ends poorly shaped or not uniform shape	*		
Collar edges not properly forced out, i.e., seam line not forced out to edge having folds 1/16 inch or more deep, undercollar exposed along edge for distance of more than 1 inch, or points along curved edge			X
Collar short, i.e., causing puckers on front(s) or back	*		
Collar long, i.e., causing puckers on topcollar or undercollar	*		
Collar not centered by more than 1/4 inch when shoulder seams at neck line are aligned		X	
Raise stitch on seam at top of undercollar omitted		X	
* Tie tab			
Top ply of tie tab twisted or tight causing edge to curl up		X	
Edges of tie tab crooked or not properly forced out, i.e., seam line not forced out to edge having folds 1/16 inch or more deep, underside exposed along edge for distance of more than 1/2 inch, or points along curved edge		X	
Tie tab poorly shaped or not uniform shape		X	
Point of tie tab off center with center of plait by more than 1/8 inch		X	
* Front closure			
Folded edge of fly-facing exposed along right edge for distance of more than 1 inch		X	
Buttons and buttonholes out of alignment causing noticeable bulge on fronts when buttoned	*		
Length of fronts when buttoned uneven at neck by more than 1/8 inch or at bottom by 1/8 inch or more		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VII. Detailed defect applicables to specific parts. - Continued

Defect	Major	Minor A	Minor B
Top edge of tie tab more than 1/8 inch from top edge of plait		X	
Corner not forced out to point or edge of step not forced out, i.e., seam line not forced out to edge having folds 1/16 inch or more deep or underside exposed along edge of step			X
Bottom corner or bottom edge not forced out, i.e., seam line not forced out to edge having folds 1/16 inch or more deep or facing exposed below bottom edge of front		X	
Steps uneven in length by 1/8 inch or more		X	
Width of stitching on right front fly less than 1-3/16 inches or more than 1-5/16 inches from front edge		X	
Stitching on right front irregular in width by more than 1/8 inch		X	
Buttonholes on right front fly-facing out of vertical alignment or unequally spaced by more than 1/4 inch		X	
Buttonhole(s) less than 5/8 inch or more than 3/4 inch from folded front edge			X
Center of top buttonhole from top of finished front step less than 1 inch or more than 1-1/4 inches			X
Length of unbuttoned fronts uneven more than 1/4 inch		X	
Cut length of buttonhole less than 5/8 inch or more than 3/4 inch			X
Buttons less than 5/8 inch or more than 3/4 inch from folded edge			X
Opening between edges of collar, with shirt buttoned, less than 3/4 inch or more than 7/8 inch			X
* Bust darts			
Ends of bust darts not tapered to point causing unsightly bulge			X
Bust dart(s) at dart line or end(s) of dart(s) on outside not pressed flat			X
Bust darts not uniformly positioned or not equal in length		X	
Dart(s) not pressed toward armhole of shirt or inside			

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VII. Detailed defect applicables to specific parts. - Continued

Defect	Major	Minor A	Minor B
Front seam line			
Front seam line not uniformly positioned from front edges or right or left side seam		X	
Armhole and sleeve			
Excessive fullness or fullness misplaced, resulting in puckers or pleats in sleeve head		*	
Sleeve tight, causing fullness or pleats on fronts or back		*	
Armhole irregular, i.e., crooked		X	
Ends of armhole seam line at underarm and side seam line staggered more than 1/4 inch		X	
Sleeve puckered or pleated in stitching of hem or hem twisted, puckered, or pleated		X	
Hem less than 1-1/4 inches or more than 1-1/2 inches in width			X
Hem irregular in width by 3/16 inch or more			X
Left and right hems not uniform in width by more than 1/8 inch			X
Sleeve hem made prior to closing underarm sleeve and side seam			X
Backs			
Ends of shoulder dart(s) not properly tapered to point causing unsightly bulge			X
Shoulder dart(s) at dart line or end(s) of dart(s) on outside not pressed flat			X
Shoulder darts not uniformly positioned by more than 1/4 inch or not equal in length by more than 3/8 inch		X	
Shoulder dart(s) not pressed toward center back on inside			X
Waist dart(s) not uniformly positioned from right and left side seams by 1/2 inch or more		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VII. Detailed defect applicables to specific parts. - Continued

Defect	Major	Minor A	Minor B
Waist darts at top uneven in length by more than 1/2 inch			X
Waist dart(s) not turned toward center back			X
Waist dart(s) at dart line or end(s) of dart(s) on outside not pressed flat			X
Inside of shirt			
* Facing			
Facing twisted, puckered, or pulled at neck or shoulder		X	
Facing full or tight between buttonholes		X	
Back edge of one or both facings short or full		*	
Back edge of right front facing-interlining or fly-facing not completely caught in overedge stitching		X	
Gorge of right front facing-interlining, right front fly-facing, left front facing, or neck edge of top or undercollar not securely caught in seaming of collar to neck edge of shirt		X	
Shoulder edge of right front facing-interlining and fly-facing or left front facing not tacked to shoulder seam		X	
One tack between buttonholes insecure or omitted			X
More than one tack between buttonholes insecure or omitted		X	
Tacks between buttonholes caught or exposed on outside	X		
Labels			
Bottom edge of combination identification and size label not parallel to and 1/2 to 3/4 inch from back edge of left front facing or right edge of combination identification and size label positioned less than 2-1/2 inches or more than 4-1/2 inches from finished bottom of shirt			X
Information other than size required for combination identification and size label omitted, incorrect, or illegible			X
Size information required for combination identification and size label omitted, incorrect, or illegible		X	
Combination identification and size label or instruction label missing	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VII. Detailed defect applicables to specific parts. - Continued

Defect	Major	Minor A	Minor B
Information on instruction label incorrect or illegible			X
Instruction label not stitched on one or more sides			X
Stitching on instruction label caught through outside of shirt		X	
Instruction label not positioned as specified herein			X
Seams			
Seamed edges of shoulder seam not overedged together		X	
Shoulder seams not pressed flat toward back			X
Seamed edges of armhole seam not overedged together		X	
End of shoulder seam allowance not caught in overedge stitching of ends of armhole seam at side seam not turned against sleeve			X
Side or sleeve seam(s) or part thereof including ends not pressed flat toward back			X
One or more side or sleeve seam edges not overedged together		X	
Ends of armhole seam allowance at side seam not caught in overedging			X
Seamed edges of side front seam not overedged together		X	
Side front seam(s) or part thereof including ends not pressed flat toward back above bottom notch		X	
Bottom hem			
Bottom hem badly twisted		X	
Front or back puckered or pleated in blindstitching of hem		X	
Bottom edge of bottom hem irregular		X	
Edge of bottom hem not overedged before blindstitching to shirt			X
Bottom hem irregular in width by 1/4 inch or more			X
Corner and edge(s) of notch opening not forced out, i.e., seam line not forced out to edge having folds 1/16 inch or more deep or underside exposed along side of notch			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VII. Detailed defect applicables to specific parts. - Continued

Defect	Major	Minor A	Minor B
Sides of notch opening not equal in length by more than 1/8 inch			X
Raw edge exposed at top of notch or side of notch at top not aligned with seam or dart line above notch by more than 1/8 inch		X	
Notch openings less than 1-5/8 inches or more than 1-7/8 inches		X	
* Shoulder loops			
Upper side of shoulder loop full or twisted		X	
Shoulder loop poorly shaped		X	
Shoulder loop misplaced so that it will not lie flat when buttoned, causing bulge or twist on shoulder loop		X	
Shoulder loop misplaced so that shoulder seam is exposed	X		
Shoulder loop misplaced, i.e., one shoulder loop further forward or back from position of other shoulder loop more than 3/16 inch up to 1/4 inch		X	
More than 1/4 inch	X		
Width of shoulder loop at pointed end less than 1-7/16 inches or more than 1-9/16 inches		X	
Shoulder loop long, i.e., point extending beyond collar seam	X		
Shoulder loop interlining omitted		X	
Shoulder loop interlining not caught in stitching			X
Width of shoulder loop at armhole end less than 1-13/16 inches or more than 1-15/16 inches		X	
Underside of shoulder loop exposed 1/8 inch along edges for a distance of 1/2 inch or more			X
Button not aligned with buttonhole, causing bulge or twist on shoulder loop or puckers on shoulder		X	
Buttonhole finished with purling on reverse side	X		
Buttonhole off center with width of shoulder loop more than 1/8 inch but not more than 1/4 inch			X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE VII. Detailed defect applicables to specific parts. - Continued

Defect	Major	Minor A	Minor B
Buttonhole off center with width of shoulder loop more than 1/4 inch		X	
Shoulder loop off center with shoulder seam more than 1/8 inch up to 3/16 inch		X	
More than 3/16 inch	X		
Shoulder loop short, i.e., point more than 5/8 inch from collar seam	X		
Pointed end of shoulder loop less than 1/4 inch or more than 3/8 inch from collar			X
Buttonhole less than 3/8 inch or more than 5/8 inch from pointed end of shoulder loop			X
Under side of shoulder loop exposed 1/8 inch along edges for a distance of 1/2 inch or more			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

The observer shall then compare the test shirt in each of the areas specified in 3.7 to the photographic standards and shall assign a rating value to each of the specified areas. The rating value assigned to an area by the observer shall be the numerical value of the photographic standard that most nearly matches the area. Seams appearing to fall midway between the numerical values of the photographic standards may be rated 2.5, 3.5, or 4.5. Each rating value assigned by each of the observers shall be recorded. The average of the three rating values assigned by the three observers shall be recorded. The average of the three rating values assigned by the three observers to the same area shall be the rating value for that area.

TABLE VIII. Examination of preparation for delivery.

Examine	Defect
Marking (interior and exterior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application
Materials	Any component missing
	Any component not as specified or damaged, effecting appearance
Workmanship	Inadequate application of components such as incomplete closure of case liners or container flaps, loose strapping, or inadequate stapling
	Bulging or distortion of containers
	Open and noncontinuous heat-seal seams and closure of polyethylene bag
Content	Number of intermediate packages per container more or less than required
	Size shown on one or more shirts not as specified on container 1/

1/ One intermediate package from each container in the sample shall be examined for this defect.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:42Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each shirt shall be folded, in accordance with standard commercial practice, to approximate dimensions of 14 inches by 7-1/2 inches. The shirt shall be inserted in a bag that is fabricated from polyethylene film that is 0.0015 inch thick. All seams and closures shall be effected by heat-sealing (see 5.3.1). Prior to or during the the heat-sealing operation, excess air shall be expelled to the extent necessary to insure the required multiples of packaged units will fit into the intermediate containers. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or a reverse flap. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape.

5.1.1.1 Intermediate packaging. Six shirts of one size only shall be packaged in a two-piece telescope type setup paperboard box conforming to type II, variety 1, class A, style 4 of PPP-B-676. The outside dimensions of the setup box (cover included) shall be 14-3/4 inches in length, 7-3/4 inches width, and 3-11/16 inches in height.

5.1.2 Level C. Shirts shall be packaged in accordance with commercial practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Seventy-two shirts of one size only, packaged as specified, shall be packed three in length and four in depth in a fiberboard shipping container assembled, closed, and reinforced to conform to class weather-resistant, size 3 of MIL-B-17757. Toward the end of the contract or if the number of shirts of the same size is less than the number of shirts required per container, mixed sizes (see 5.3.1.1) may be packed in the same shipping container.

5.2.2 Level B. Seventy-two shirts of one size only, packaged as specified, shall be packed three in length and four in depth in a fiberboard shipping container, assembled and closed to conform to class domestic, size 3 of MIL-B-17757. The container shall be constructed of grade 275 fiberboard. Toward the end of the contract or if the number of shirts of the same size is less than the number of shirts required per container, mixed sizes (see 5.3.1.1) may be packed within the same shipping container.

5.2.3 Level C. Shirts shall be packed in a manner to assure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification, as applicable.

5.3 Marking. Intermediate and exterior shipping containers shall be marked in accordance with requirements of MIL-STD-129.

5.3.1 Polyethylene packages. Each polyethylene bag (see 5.1.1) shall have the national stock number, the size, the nomenclature, and the quantity of the shirts contained therein legibly printed or stamped in black across the center face of the bag, or a white paper label with the required information printed thereon in black shall be placed in the bag so that it is readable through the polyethylene.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

5.3.1.1 Mixed sizes. Each shipping container packed with mixed sizes (see 5.2.1 and 5.2.2) shall have, securely attached to the end and side, white paper labels 5 inches by 4 inches with the words mixed sizes plainly printed thereon and under these words shall be legibly printed the correct quantity and sizes of shirts contained therein.

6. NOTES

* 6.1 Intended use. The shirt covered by this specification is intended to be worn with the USAF color shade No. 1549 skirt and coat by the female personnel of the Department of the Air Force.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Size required (see 1.1)

(c) Government-furnished standard patterns (see 3.4)

* (d) Testing of materials and components (see 4.2.1)

(e) Selection of applicable levels of preservation and packaging and packing (see 5.1 and 5.2).

6.3 Color shades. Samples of color shades may be obtained from the procuring activity or as directed by the contracting officer.

6.4 Figure. Figure 1 shows the general design of the shirt and is for information only.

6.5 Marginal notations. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only, and the Government will assume no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 11

Preparing activity:
Air Force - 11

Reviewer:
Air Force - 99, 82

Project No. 8410-F512

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

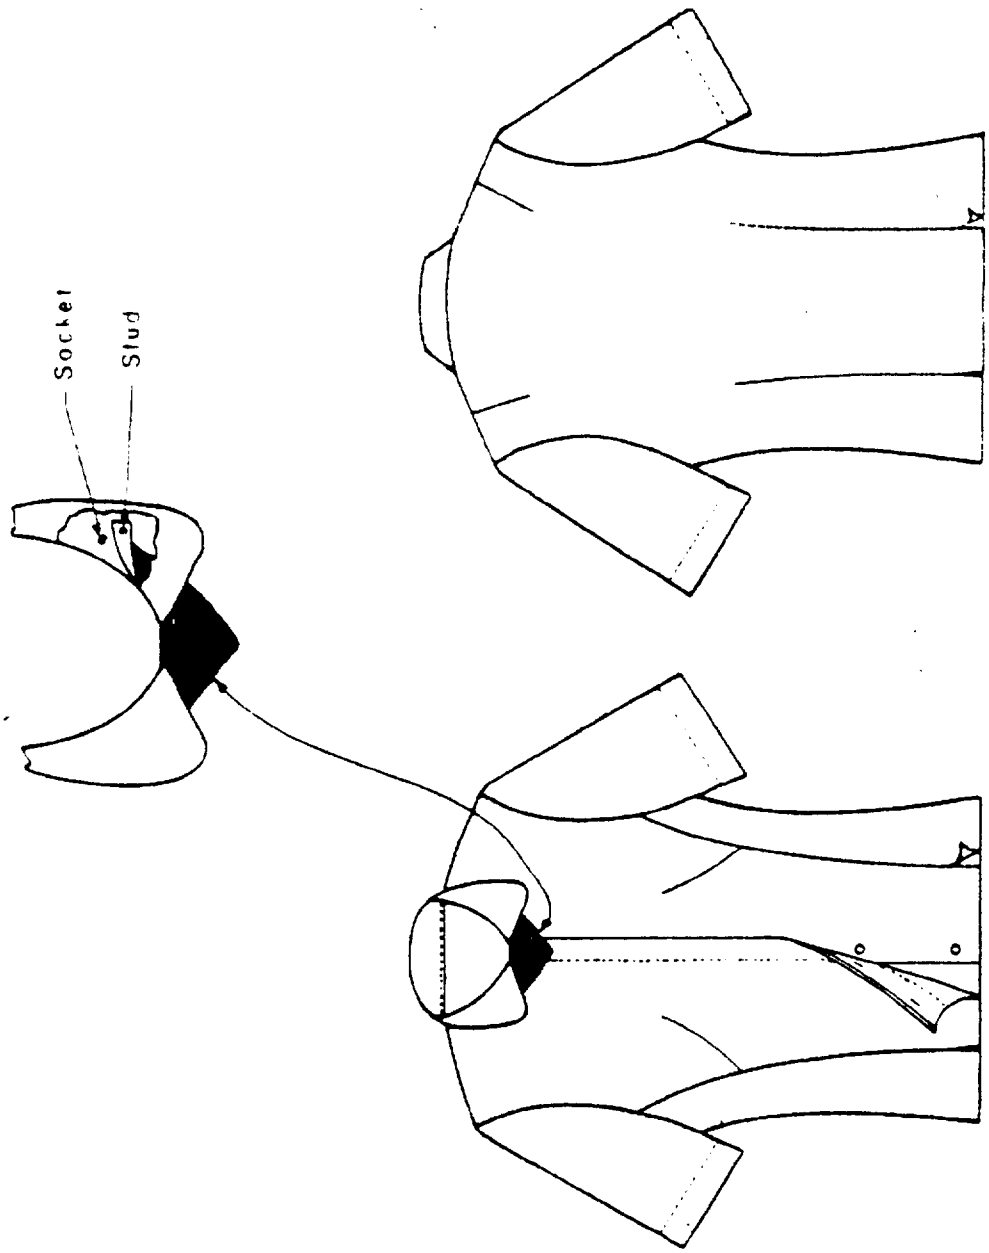


FIGURE 1. Shirt (front and rear views).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENESS
Wright-Patterson AFB, O 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-S-33200B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1426 OCT 76 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.