MIL-S-83234C(USAF)
1 June 1988
SUPERSEDING
MIL-S-83234B(USAF)
6 August 1982

MILITARY SPECIFICATION

SKIRTS, WOMEN'S, BLUE

This specification is approved for use within the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's skirts.

1.2 Classification. The skirts shall be of one type furnished in the following classes, as specified (see 6.2):

Class 1 - Polyester/wool, tropical cloth, USAF Blue 1578, 10.00 oz.
Class 2 - Texturized polyester/serge cloth, USAF Blue 1578, 6.50 oz.
Class 3 - Polyester/wool, tropical cloth, USAF Blue 1608, 10.25 oz.

1.2.1 Lengths and sizes. The skirts shall be furnished in the following lengths and sizes, as specified (see 6.2):

Schedule of lengths and sizes

Short	6	7	8	9	10	11	12	13	14	15	16		
Regular	6	7	8	9	10	11	12	13	14	15	16	18	20
Long	6		8		10		12		14		16	18	

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENES, Wright-Patterson AFB OH 45433-6503 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-B-871	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	Fastener, Slide, Interlocking
V-T-276	Thread, Cotton
V-T-280	Thread, Gimp, Cotton, Buttonhole
V-T-295	Thread, Nylon
NN-P-71	Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
DDD-L-20	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-C-368	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-P-15011	Pallets, Material Handling, Wood Post Construction, 4-Way Entry
MIL-C-21115	Cloth, Tropical: Wool, Polyester/Wool
MIL-T-43548	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	Cloth, Polyester; Polyester and Cotton; Polyester and Rayon, for Pockets
MIL-C-44296	Cloth, Fusibles
MIL-C-83448	Cloth, Serge, Polyester Texturized

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

MIL-STD-147	Palletized Unit Loads
MIL-STD-1609	Provisions for Evaluating Quality of Womens' Skirts
MIL-STD-2073-1	DoD Materiel Procedures for Development and Application of Packaging Requirements

2.1.2 Other Government documents. The following other Government document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

Rules and Regulations under the Textile Fiber Products Identification Act

(Application for copies should be addressed to the Federal Trade Commission, Washington DC 20580-0001.)

(Copies of specifications, standards, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the document which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment document which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads

Department of Defense (DoD) Standard Shades for Buttons

(Application for copies should be addressed to The Color Association of the United States, 343 Lexington Ave., New York NY 10016-0927.)

(Nongovernment standards and other publications are normally available from the organization which prepare or which distribute the documents. These documents also may be available in or through libraries or other information services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples, when furnished (see 6.3), are solely for guidance and information to the contractor. Variations from the document may appear in the samples, in which case the document shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.4 and 6.2).

3.3 Materials (see 6.5)

3.3.1 Basic material. The basic material for the class 1 skirt shall be USAF Color Blue, Shade No. 1578 conforming to type III, class 3 of MIL-C-21115; the material for the class 2 skirt shall be USAF Color Blue, Shade No. 1578 conforming to MIL-C-83448; and the material for the class 3 skirt shall be USAF Color Blue, Shade No. 1608 conforming to type III, class 4 of MIL-C-21115.

3.3.2 Rayon cloth. The rayon cloth for the lining shall conform to class 1 of MIL-C-368 and shall be USAF Color Blue, Shade No. 1086 (see 6.3).

3.3.3 Polyester-cotton twill cloth. The polyester-cotton twill cloth for the waistband interlining shall be black conforming to class 1 of MIL-C-43718.

3.3.3.1 Fusible material. As an alternate, the waistband interlining may be type VI, style A, class 2 of MIL-C-44296 and the color shall be black.

3.3.4 Tape. The tape for finishing the bottom of the skirt shall be 1/2 +1/16 inch wide, 65 inches in length, plain weave, woven of continuous filament rayon yarn. The tape shall weigh not less than 5.0 ounces per gross yards and shall contain not less than 66 ends full width and 52 picks per inch. The tape shall match the color of the basic material and shall have good colorfastness to wet dry cleaning and crocking.

3.3.5 Braid. The braid for the hanger loops shall be cotton flat braid or rayon flat braid. The braid shall be 1/8 inch to 3/16 inch wide, shall have a minimum breaking strength of 75 pounds, and shall match the color of the basic material. The braid shall have good colorfastness to crocking and wet dry cleaning.

3.3.6 Labels. The skirt shall have an identification, a size and an instruction label or a combination identification, size and instruction label conforming to DDD-L-20. The colorfastness to dry cleaning requirements of DDD-L-20 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

3.3.6.1 Identification, size, and instruction labels. The identification, size, and instruction labels for the skirt shall conform to type VI, classes 1, 2, and 3.

3.3.6.2 Combination identification, size and instruction label. The combination identification, size and instruction label for the skirt shall conform to type VI, class 14 and shall include the following information:

Skirt, Women's, Blue
Contract No.: DLA-100-00-0-0000 (Example) 1/
Fiber Products Act (information as applicable) 1/
Stock No.: 8410-00-000-0000 (Example) 1/
Size: 12R (Example)
Contractor 1/
DRY CLEAN ONLY

1/ The contractor shall include the applicable information.

3.3.7 Thread. The thread for all seaming and stitching shall be shade Navy Blue AT, C.A. 66060 (see DoD Standard Color Card). The cotton thread for seaming the skirt and making the buttonhole shall be type IA3, ticket No. 50, 3 ply; for attaching the button by hand sewing shall be type IB3, ticket Nos. 12 or 16, 4 ply; and for attaching the button by machine sewing shall be type IB3, ticket No. 20, 4 ply conforming to V-T-276. If an automatic machine that sews and shanks (wraps) a button in one operation is used, the thread shall be waxed nylon, monocord, special No. 5, having a minimum breaking strength of 16 pounds and a minimum length of 2,150 yards per pound and shall be tested for these requirements and for colorfastness requirements to wet dry cleaning and light in accordance with V-T-295. As an alternate, cotton-covered polyester thread conforming to ticket No. 50 of MIL-T-43548 may be used for all seaming and stitching.

3.3.7.1 Colorfastness. The dyed thread shall show fastness to wet dry cleaning and light equal to or better than the standard sample (see 6.3). When no standard sample is available, the dyed thread shall show "good" fastness to wet dry cleaning and light.

3.3.8 Slide fastener. The slide fastener shall be 7 inches in length and shall conform to type I, style 3, short tab pull, size LS, brass, aluminum, or zinc chain of V-F-106, except that the salt spray resistance requirement shall not apply.

3.3.8.1 Tape for slide fastener. The tape extension at the top shall extend not less than 1-1/4 inches beyond the stops. The tape shall match the color of the basic material and shall have colorfastness to wet dry cleaning equal to or better than the standard sample (see 6.3). If a standard sample is not available, the tape shall have good colorfastness to wet dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:43Z
Check the source to verify that this is the current version before use.

3.3.9 Gimp. The gimp shall be Navy Blue AT, C.A. 66060 (see DoD Color Card) and shall conform to type I or II, size No. 8 of V-T-280. The gimp shall have colorfastness to wet dry cleaning equal to or better than the standard sample (see 6.3). If a standard sample is not available, the gimp shall have good colorfastness to wet dry cleaning.

3.3.10 Button. The button shall be Blue BV, C.A. 62003 (see DoD Color Card) and shall conform to type II, class D, style 20 or 21, size 24 line of V-B-871.

3.4 Design. Each skirt shall have six gores, a dart at the waistband in each side front gore and in each side back gore, an attached waistband, and a small inside hanging pocket in the waistband seam and shall be fully lined and unhemmed. The closure of the skirt shall be effected by a button and a buttonhole at the waistband and a slide fastener in the left side (as worn).

3.5 Patterns. Standard patterns shall be furnished by the Government. The standard patterns show size, seam allowance, shape and placement of pockets, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts. The standard patterns shall provide a seam allowance of 3/4 inch for the front, back, and the side seams, and 3/8 inch for the waistband seam. The standard patterns for the lining shall provide a 3/4 inch seam allowance for the front and back seams and a 5/8 inch seam allowance for the side seams. The standard patterns shall not be altered in any way, and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the Government patterns.

3.5.1 Pattern parts. The component parts of the skirt shall be cut from the materials specified in accordance with the number of parts indicated in table I.

3.6 Construction. The construction of the skirt shall conform in all respects to the requirements specified in table II and herein. Figures are furnished for guidance and information only. If there are any inconsistencies between the specification and the figures, the specification shall govern.

3.6.1 Stitches, seams, and stitchings. All stitches, seams, and stitching types specified in table II shall conform to FED-STD-751. The type of stitches, seams, stitchings, and the minimum and maximum number of stitches per inch shall be as specified in table II. Whenever two or more seam or stitch types are specified for the same part of the operation, any one may be used. The looper (underthread) of stitch type 401 shall be on the inside of the finished skirt. Seam allowances shall be maintained with seams sewn so that raw edges, run-offs, twists, pleats, puckers, or open seams will not result. All seams shall start and finish evenly at the seam line. Thread tension shall be properly maintained so that stitching will not be tight or loose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts.

Material	Pattern nomenclature	Cut parts
Basic material (see 3.3.1)	Center front	1
	Side front	2
	Center back	1
	Side back	2
	Waistband	1
	Pocket	1
	Placket	1
Rayon cloth (see 3.3.2)	Center front	1
	Side front	2
	Center back	1
	Side back	2
Polyester-cotton twill cloth (see 3.3.3)	Waistband interlining	1

3.6.1.1 Thread breaks and ends of seams and stitchings. The ends of all seams and stitchings produced with stitch type 301, when not caught in other seams or stitchings, except the pointed ends of the darts, shall be backtacked not less than 1/4 inch. The thread ends at the bottom of each dart shall be trimmed to a length of 1/2 to 3/4 inch. The ends of continuous lines of stitching, except on labels, shall be overlapped not less than 1/2 inch. The ends of continuous lines of stitching on labels shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks of stitch type 401 may be repaired using stitch type 301.

3.6.1.2 Repair of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, the stitching shall be repaired by superimposing and restarting the stitching a minimum of 1/4 inch back of the end of the stitching (see NOTE).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

b. Except for prestitching, thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/4 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/4 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner (see NOTE).

NOTE: When making the above repairs, the ends of the repairing stitch must be backstitched and thread ends trimmed close to the skirt.

3.6.1.3 Types 101, 502, 503, 515, 516, 517, 518, 519, and 801 stitchings. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the material. All repairs shall be in accordance with 3.6.1.2.

3.6.1.4 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch patterns, stitches per inch, and size and type of thread are met; and at least three tying, overlapping, or backstitches are used to secure the ends of stitches.

3.7 Manufacturing operations requirements. The skirt shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed unless otherwise specified. Any additional basting or holding stitches used to facilitate manufacture are permissible provided the thread is removed or does not show on the finished skirt.

3.7.1 Shade and size marking. The component parts of the skirt and lining shall be marked, ticketed, or bundled to insure a uniform shade and size. Any method may be used except:

a. Corrosive metal fastening devices.

b. Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of an ink pad numbering machine, rubber stamp, or pencil is allowed, provided the numbering does not show on the outside of the finished skirt or lining, and wherever possible, is covered by the seam allowance.

3.8 Finished measurements. The measurements of the finished unhemmed skirt shall conform to the requirements specified in table III . When measuring, the skirt shall be buttoned and placed flat upon a table.

3.9 Workmanship. The finished skirt shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1.	Cut parts. a. Spread the materials without tension so that the cut parts in the top ply and in the bottom ply will match the patterns. b. Place the patterns so that the directional lines on the patterns will be in the warp direction of the basic material. Unless otherwise specified herein, cut all parts of the skirt that are made of the basic material from the same piece of basic material and in strict accordance with the patterns. The pockets may be cut from ends of the basic material. c. Cut the parts of the lining with the directional lines on the patterns in the warp direction of the rayon cloth and in strict accordance with the patterns. d. Cut the waistband interlining with the directional lines on the pattern in the warp direction of the polyester-cotton twill cloth and in strict accordance with the pattern.			
2.	Replace defective parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages as specified in MIL-STD-1609 are excluded and replaced with nondefective and properly matched parts.			
3.	Mark parts. Mark, ticket, or bundle the cut parts to insure a uniform shade and size throughout the skirt (see 3.7.1). Sew-on type tickets may be used to shade mark the basic material.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
4.	Make darts.			
	a. Fold the darts in the side fronts and the side backs in accordance with the pattern marks. Stitch each dart, tapering to nothing, 1/2 inch below the drill hole.	301	OSf-1	12-14
	b. Press the dart in each side front and the dart in each side back flat so that the inside folded edge of the darts in the finished skirt will be towards the center front and the center back, respectively.			
	c. Trim the thread ends at the bottom of each dart to a length of 1/2 to 3/4 inch.			
5.	Make fronts.			
	a. Stitch each side front to the center front, starting at the waistline.	301	SSa-1	12-14
	b. Pink the raw edges of the seam allowance of each seam.			
	NOTE: The width of the pinked seam allowance shall be not less than 5/8 inch.			
	c. In lieu of Operations 5.a and 5.b, stitch each side front to the center front and pink the raw edges of the seam allowance in one operation.	301	SSa-1	12-14
	d. Press the seam allowance of each seam open.			
6.	Make backs.			
	a. Stitch each side back to the center back, starting at waistline.	301	SSa-1	12-14
	b. Pink the raw edges of the seam allowance of each seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
6.	Make backs. - Contd			
	NOTE: The width of the pinked seam allowance shall be not less than 5/8 inch.			
	c. In lieu of Operations 6.a and 6.b, stitch each side back to the center back and pink the edges of the seam allowance in one operation.	301	SSa-1	12-14
	d. Press the seam allowance of each seam open.			
7.	Make pockets.			
	a. Mark the location of the pocket opening, at the top of the side front panel on the right side (as worn), 1 inch in from the finished side seam and 2-3/4 inches towards the center of the skirt.			
	NOTE: The finished pocket shall be 2-3/4 ±1/8 inches in width and 4 ±1/4 inches in depth.			
	b. Place the pocket on the side front panel, face to face, in accordance with the pattern marks and stitch. Notch the side front panel for the pocket opening.	301	LSq-2(a)	12-14
	c. Fold the seam allowance and the pocket toward the top of the skirt. Raise stitch 1/16 inch from the folded edge through the seam allowance and the pocket.	301	LSq-2(b)	12-14
	d. Fold the pocket even with top edge of skirt, with the face sides together. Seam the pocket from the top to the folded bottom edge 3/8 inch from the raw edges.	301	SSa-1	12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
7.	Make pockets. - Contd			
	e. Overedge stitch the raw edges of the seam allowance together.	502 or 503	SSa-1	6-10
	OR			
	f. As an option, perform Operations 7.d and 7.e in one operation.	515 or 516 or 517 or 518 or 519	SSa-2	10-14
8.	Join fronts to back.			
	a. Stitch each front to the back, starting at the top and leaving an opening for the placket in accordance with marks on pattern, on the left side (as worn).	301	SSa-1	12-14
	b. Pink the raw edges of the seam allowance of each side seam, the raw edges of the left side opening, and the raw edges of the bottom of the skirt.			
	OR			
	c. As an alternate method, the raw edges of the seam allowance of each side seam, the raw edges of the left side opening, and the raw edges of the bottom of the skirt may be overedge stitched.	502 or 503	EFd-1	6-10
	NOTE: The width of the pinked seam allowance shall be not less than 5/8 inch.			
	d. In lieu of Operations 8.a, 8.b, and 8.c stitch each front to the back and pink the raw edges of the seam allowance of each side seam.	301	SSa-1	10-14
	e. Press the seam allowance of each side seam open.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
9.	Set slide fastener. The slide fastener closure shall be smooth and flat. The stop at the top of the slide fastener shall be not less than 1/8 inch nor more than 3/8 inch below the bottom of the finished waistband. The stop at the bottom of the slide fastener shall be not more than 1/4 inch above or below the top end of the side seam line. The stitching on the front and the back of the side opening shall not interfere with the operation of the slider. When the slide fastener is closed, the welt shall cover the slide fastener and the stitching along the back edge. The edge of the welt on the front of the opening shall overlap the back of the skirt slightly at the bottom of the side opening without pleats or puckers on the outside of the skirt.			
	a. Fold the placket piece in half lengthwise. Place slide fastener on placket with the center of the closed chain 3/4 to 7/8 inch from folded edge and stitch fastener tape to placket 1/8 inch from edge of chain along the side nearest to the raw edge of placket.	301	SSa-1	10-14
	b. Pink side and bottom edge of placket piece. As an alternate, the side and bottom edge of placket piece may be overedged.	502, 503, 301	SSa-1	6-10 10-14
	c. Place placket (chain side down) on back of skirt with the center of the closed chain 1/8 to 3/16 inch to the front of the side seam and stitch placket to opening, following the curve of the hip. Do not stretch fabric.	301	SSbd-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
9.	Set slide fastener. - Contd			
	d. Turn placket to its finished position and stitch 1/16 to 1/8 inch from folded edge of skirt through fastener tape and placket piece.	301	LSah-1	10-14
	e. Stitch front half of fastener tape to front raw edge of skirt opening, following curve of hip. Do not stretch fabric.	301	SSbd-1	10-14
	f. Fold front opening in line with side seam and stitch to fastener tape, forming a welt 1/2 to 5/8 inch wide. Stitch across the bottom of welt to the side seam, catching the placket and ends of fastener tapes in the stitching. The stitching shall be 1/8 to 1/4 inch from the chain and the welt shall cover the slide fastener and the stitching along back edge when fastener is closed.	301	SSak-1	10-14
10.	Make lining.			
	a. Fold the pleats in each side front lining and each side back lining, using the pattern notches for a guide, so that the pleats will correspond with the darts in the outer shell of the finished skirt. Stitch across the top of each pleat.	301	SSa-1	10-14
	b. Press each pleat, tapering to nothing.			
	NOTE: The inside edge of the pleat in each side front lining shall face the center front in the finished skirt. The inside edge of the pleat in each side back lining shall face the center back in the finished skirt.			
	c. Stitch each side front lining to the center front lining.	301	SSa-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations.- Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
10.	Make lining. - Contd			
	d. Pink the raw edges of the seam allowance of each seam.			
	NOTE: The width of the pinked seam allowance shall be not less than 5/8 inch.			
	e. In lieu of Operations 10.c and 10.d, stitch each side front lining to the center front lining and pink the raw edges of the seam allowance in one operation.	301	SSa-1	10-14
	f. Stitch each side back lining to the center back lining.	301	SSa-1	10-14
	g. Pink the raw edges of the seam allowance of each seam.			
	NOTE: The width of the pinked seam allowance shall be not less then 5/8 inch.			
	h. In lieu of Operations 10.f and 10.g, stitch each side back lining to the center back lining and pink the raw edges of the seam allowance in one operation.	301	SSa-1	10-14
	i. Pink the bottom raw edge of the front lining and of the back lining.			
	j. Stitch the front lining to the back lining, leaving an opening for the placket on the left side (as worn). The opening shall be the length of placket.	301	SSa-1	10-14
	k. Pink the raw edges of the seam allowance of each side seam and the raw edges of the left side opening.			
	NOTE: The width of the pinked seam allowance shall be not less than 1/2 inch.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
10.	Make lining. - Contd			
	l. In lieu of Operations 10.j and 10.k, stitch each side of the back lining to the front lining and pink the raw edges of the side seam allowance in one operation.	301	SSa-1	10-14
	m. Press open the seam allowance of each seam of the lining.			
11.	Join lining to outer shell.			
	a. Position back lining placket opening to back placket opening with attached placket, face to face and raw edges even and join from top to approximately 1-1/2 inches below placket with a 5/8 inch seam.	301	SSa-1	10-14
	b. Position front lining opening to front lining panel, face to face and raw edges even and join from top to approximately 1-1/2 inches below placket opening.	301	SSa-1	10-14
	c. Turn lining to inside of skirt, fold the front opening in line with the side seam forming a 1/2 to 5/8 inch welt and stitch 1/8 to 1/4 inch from turned back edge of lining. The stitching shall be through the lining, slide fastener tape and front panel.	301	SSa-1	10-14
	d. Turn the skirt to the outside, close the slide fastener and stitch across the bottom of the opening from the side seam to the welt stitching, catching the placket and ends of slide fastener tape in the stitching.	301	SSa-1	10-14
	e. In lieu of Operations 11.a, 11.b, 11.c, and 11.d the following may be used: Fold under the lining seam allowance on the left side, along the seam line, and stitch 1/4 to 3/8 inch from folded edge.	301	EFa-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
11.	Join lining to outer shell. - Contd			
	f. With the pleats and seams of lining aligned with the darts and seams of the outer shell and the top raw edges aligned, stitch lining to shell 1/8 to 3/16 inch from top raw edge.	301	SSa-1	10-14
	g. When Operation 11.e is used, tack the bottom of the side opening of the lining to the skirt left side seam allowance at the bottom of the side opening.	Hand		4 per tack
12.	Attach two hanger loops.			
	a. Position one hanger loop on the back, at the top of the lining and in line with the right side seam line, and one hanger loop on the back, at the top of the lining and approximately 1 inch from the left side opening. Stitch each hanger loop to the skirt with a single row of stitching 3/16 inch from the edge. NOTE: The length of each hanger loop in the finished skirt shall be 1-1/2 ±1/4 inches.	301	SSab-1	10-14
13.	Attach waistband.			
	a. Overedge stitch the raw edges of the inside portion of the waistband and the waistband interlining together.	502 or 503	EFd-1	6-10
	b. Match the notches on the waistband sections with the notches on the skirt, as indicated by the pattern marks, leaving the waistband extensions. Seam the waistband sections to the top of the skirt on the outside 3/8 inch, working in the fullness evenly at the back portion of the skirt between the side seams and catching the top ends of the slide fastener tape and the darts in the stitching.	301	BSg-2(a)	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
13.	Attach waistband. - Contd			
	NOTE: The finished waistband extensions shall be 3/4 ±1/8 inch beyond the placket.			
	c. Fold the waistband in half lengthwise. Seam across the end of the waistband extensions. Trim, turn, and work out the corners and the point of the waistband extensions.	301	SSe-2(a)	10-14
	NOTE: Operation 13.c may be performed before Operation 13.b.			
	d. Turn the free edge of the waistband to the inside and stitch on the outside 1/16 inch below the waistband seam through all plies.	301	Similar to BSf-2(b)	10-14
	NOTE: The top of the slide fastener chain in the finished skirt shall be not more than 3/8 inch from the waistband joining seam and shall extend under the waistband. The width of the waistband in the finished skirt shall be 1 ±1/8 inch.			
14.	Attach labels.			
	a. Position the tops of the identification, size, and instruction labels on the bottom of the waistband at the center back (off center tolerance of 1/2 inch), with the size label on the left side and the instruction label on the right side (as worn). Stitch the tops of the identification, size, and instruction labels to the bottom of the waistband with one row of stitching. Labels may be caught in waistband joining.	301	LSa-1	10-14
	OR			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
14.	Attach labels. - Contd			
	b. In lieu of Operation 14.a, position the top of the combination identification, size, and instruction label on the bottom of the waistband at the center back (off center tolerance of 1/2 inch). Stitch the top of the combination identification, size, and instruction label to the bottom edge of the waistband with one row of stitching. NOTE: The stitching shall not be through the printing on the labels.	301	LSa-1	10-14
15.	Bartack each end of pocket opening.			
	Place a 1/4 inch long bartack at each end of the pocket opening, with the bartack perpendicular to the pocket opening.	Bartack		21-28 stitches per bartack
16.	Make buttonhole in waistband.			
	Make a buttonhole in the skirt waistband end. Bartack the ends of the buttonhole in a separate operation.	Buttonhole Bartack		52-54 stitches per buttonhole including tack 21 stitches per bartack
	NOTE: The buttonhole shall be a square-bar-type, eyelet-end buttonhole, worked over gimp, with the purling on the outside of the waistband and with the inside edge of the eyelet 7/16 to 9/16 inch from the point of the waistband. The finished cut length of the buttonhole shall be 5/8 to 3/4 inch.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
17.	Attach button to waistband.			
	a. Close the slide fastener, and mark the location for the button on the waistband to correspond with the eyelet of the buttonhole in the waistband.			
	b. Sew the button, on the mark, through the waistband.	101 or		20-24 stitches per button
		301 or		14-16 stitches per button
		hand or		3 stitches per button double thread
		801 (see Fig 1)		7 (min) 1 deep set per button
	NOTE: If the button is attached by hand sewing, the hand sewing shall be tacked off with two stitches, and the ends of the thread shall be hidden.			
18.	Clean skirt.			
	a. Trim thread ends and remove all loose thread.			
	b. Remove all spots, stains, and shade tickets.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
19.	Press skirt. a. Press the entire skirt. b. Remove gloss marks, wrinkles, and impressions from thread, tickets, and seams.			
20.	Prepare skirt for packaging. a. Insert the tape for finishing the bottom of the skirt (see 3.3.4) in a paper envelope. b. Using a string, attach the envelope containing the tape to the hanger loop on the left side (as worn) of the skirt.			


4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facility suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

NOTE: Stitch class 800 shall be formed with one or more needle threads and has a general characteristic that the thread does not interloop with itself or any other thread or threads. The thread is passed completely through the material by means of a double pointed center eye needle and returned by another path. Stitch class 800 simulates hand stitching.

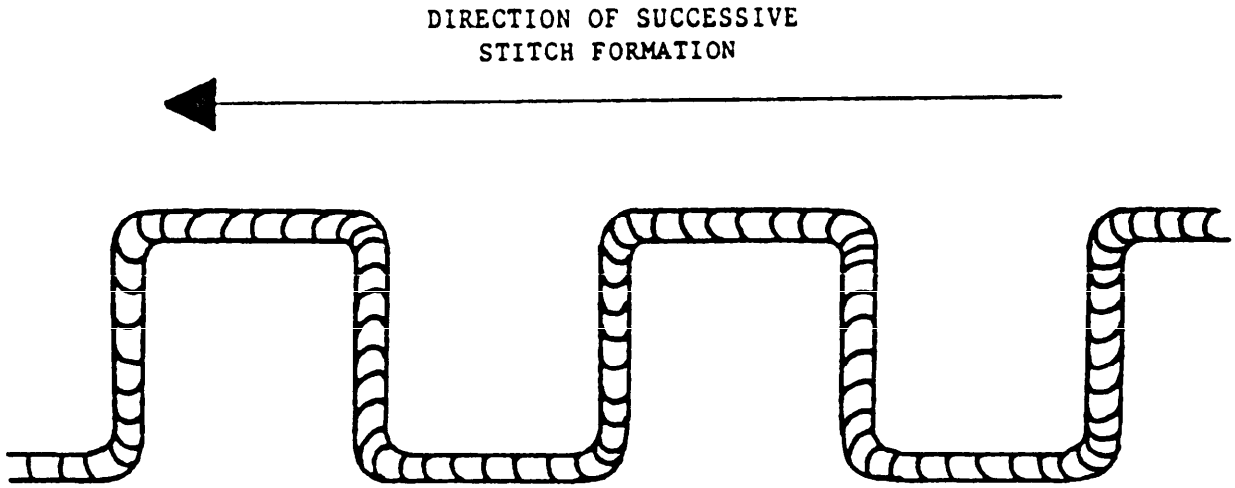

Stitch type 801 shall be formed with one needle thread which is passed completely through the material and returned by another path after the material has been moved forward one stitch length.

FIGURE 1. Stitch type 801.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements (inches).

Size	1/2 Waist 1/	1/2 Hip 2/	Length 3/
Short			
6	11	17	26-1/4
7	11-1/2	17-1/2	26-3/8
8	12	18	26-1/2
9	12-1/4	18-1/4	26-5/8
10	12-1/2	18-1/2	26-3/4
11	12-3/4	18-3/4	26-7/8
12	13	19	27
13	13-3/8	19-3/8	27-1/8
14	13-3/4	19-3/4	27-1/4
15	14-1/8	20-1/8	27-3/8
16	14-1/2	20-1/2	27-1/2
Regular			
6	11	17	27-1/4
7	11-1/2	17-1/2	27-3/8
8	12	18	27-1/2
9	12-1/4	18-1/4	27-5/8
10	12-1/2	18-1/2	27-3/4
11	12-3/4	18-3/4	27-7/8
12	13	19	28
13	13-3/8	19-3/8	28-1/8
14	13-3/4	19-3/4	28-1/4
15	14-1/8	20-1/8	28-3/8
16	14-1/2	20-1/2	28-1/2
18	15-1/4	21-1/4	28-3/4
20	16-1/4	22-1/4	29
Long			
6	11	17	28-1/4
8	12	18	28-1/2
10	12-1/2	18-1/2	28-3/4
12	13	19	29
14	13-3/4	19-3/4	29-1/4
16	14-1/2	20-1/2	29-1/2
18	15-1/4	21-1/4	29-3/4
Tolerances	±1/4	±3/8	±1/4

1/ Measure the 1/2 waist from folded edge to folded edge at the waistband opening.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements (inches). - Continued

2/ Measure the 1/2 hip of the size Short skirt from folded edge to folded edge, 1/4 inch above the side opening.
Measure the 1/2 hip of the size Regular skirt from folded edge to folded edge, at the side opening.
Measure the 1/2 hip of the size Long skirt from folded edge to folded edge, 1/4 inch below the side opening.
3/ Measure the length at the center front from the bottom edge of the waistband to the unfinished bottom edge of the skirt.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in FED-STD-191 or MIL-STD-1609, as applicable.

4.4 First article inspections. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.5.3. The presence of any defect shall be cause for rejection of the first article.

4.5 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be in accordance with MIL-STD-1609.

4.5.1 Components and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.5.1.1 Component testing. In addition to any testing required by 4.5.1, components listed in table IV shall be tested for the characteristics noted. The methods of testing specified in FED-STD-191 and as listed in table IV shall be followed. All test reports shall contain the individual values used in expressing the final results. The lot size and sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. The lot size units and the sample units shall be as follows:

Component	Lot size unit	Sample unit
Tape	Yard	1 linear yard
Braid	Yard	5 yards

TABLE IV. Component tests.

Component	Characteristic	Requirement Paragraph	Test Method
Tape	Material identification	3.3.4	1500 1/
	Width	3.3.4	2/
	Weight (per gross yards)	3.3.4	5040 3/
	Yarns per inch:		
	Warp	3.3.4	5050
	Filling	3.3.4	5050
	Colorfastness:		
	Crocking	3.3.4	5651
	Wet dry cleaning	3.3.4	5622
Braid	Material identification	3.3.5	1200 or 1500 1/
	Width	3.3.5	5020
	Breaking strength	3.3.5	4/
	Colorfastness:		
	Crocking	3.3.5	5651
	Wet dry cleaning	3.3.5	5622

1/ A certificate of compliance is acceptable for this requirement.
2/ The test method shall be 5020 of FED-STD-191, except that one determination per sample unit shall be made.
3/ The average of the ounces per linear yard shall be multiplied by 144 to yield ounces per gross yards.
4/ The test method shall be 5100 of FED-STD-191, except that the breaking strength shall be determined on the full width of the braid and the jaw dimensions shall be greater than the width of the braid.

4.5.2 In-process inspection. Inspection shall be made at any point or during any phase of manufacturing to determine whether operations or assemblies are accomplished as specified and to verify that the working patterns conform to the Government patterns in all respects. The Government shall reserve the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

4.5.3 End item inspection

4.5.3.1 Individual examination. As a final step in the contractor's production control plan and before formation of a lot, each skirt shall be laid out flat on a table and examined for those defects identified by an asterisk (*) and listed as selected defects in MIL-STD-1609. Any skirt containing a selected defect shall not be included in an end item lot.

4.5.3.2 Point count inspection. After the skirts have been subjected to the individual examination, sampling and inspection provisions for end item examination, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1609. The occurrence of defects during these examinations shall not exceed the applicable point value or defect limit specified.

4.5.3.3 Palletization examination. Examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the acceptable quality level, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Examine	Defects
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps or film as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, C, or Commercial, as specified (see 6.2).

5.1.1 Level A

5.1.1.1 Unit packaging. Each skirt shall be laid out flat. A sheet of 20-pound (minimum) basis weight kraft paper measuring approximately 26 inches by 22 inches shall be placed on top of the skirt. Two lengthwise parallel folds of the skirt and the paper as a unit, resulting in a folded width of 12 inches, shall be made. If the paper is wider than the skirt, the excess paper may be folded over to the same width of the skirt. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

top of the skirt shall then be folded downward to form a unit package measuring approximately 18-1/2 inches by 12 inches. Each folded skirt shall be placed in a flat style bag. The bag shall be made of clear polyethylene that is 0.00125 ±20 percent in thickness. The bag shall be formed with heat-sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The bag shall be not less than 1 inch longer than the folded garment. The unsealed opening shall be at the smallest dimension of the bag.

5.1.1.2 Intermediate packaging. Ten skirts of one class and size only, unit packed as specified in 5.1.1.1, shall be further packaged in a box conforming to type CF, class domestic, variety SW, grade 175, style FTC of PPP-B-636. The unit packs shall be alternated end for end, 10 in depth, within the box. The approximate inside dimensions of the box shall be 19-1/2 inches in length, 12 inches in width, and 4 inches in depth. Two ounces of naphthalene flakes shall be uniformly distributed throughout the contents of each box containing class 1 skirts (see 6.2). The box closure shall be secured with 2 inch wide (minimum) tape conforming to type III, grade B of PPP-T-45. The tape shall be applied at the center of the length opening and shall extend along the bottom and up each side at least 3 inches.

5.1.2 Level C. Each skirt shall be preserved in accordance with MIL-STD-2073-1.

5.1.3 Commercial. Each skirt shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, C, or Commercial, as specified (see 6.2).

5.2.1 Level A. Thirty skirts of one class and size only, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3s of PPP-B-636. Level A packages shall be packed flat, three in length, within the shipping container. The approximate inside dimensions of each shipping container shall be 20-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Each shipping container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification. Towards the end of the contract or when there are less than the quantity of the same size required per shipping container, mixed sizes (see 5.4.3) may be packed in the same container.

5.2.2 Level B. Thirty skirts of one class and size only, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, type CF or SF, class domestic, variety SW, grade 275 of PPP-B-636. Level A packages shall be packed flat, three in depth, within the shipping container. The approximate inside dimensions of each shipping container shall be 20-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Each shipping container shall be closed in accordance with method II as specified in the appendix of the shipping container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

Towards the end of the contract or when there are less than the quantity of skirts of the same size is less than the quantity of the same size required per shipping container, mixed sizes (see 5.4.3) may be packed in the same container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification, except that the inspection shall be in accordance with 4.5.3.2.

5.2.3 Level C. Skirts, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-2073-1.

5.2.4 Commercial. Skirts, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), skirts packed as specified in 5.2, shall be palletized on a 4-way, type I, style 1, 1A, or 1B, size A, class 1 pallet fabricated in accordance with MIL-P-15011 or on a 4-way, type IV, V, or VIII, class 1, size 2, grade A pallet fabricated in accordance with NN-P-71. Each prepared load shall be in accordance with load type I or Ia and bonded with the applicable strap bonding or film bonding means specified in MIL-STD-147. The pallet pattern shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer. Inspection shall be in accordance with 4.5.3.3.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Bar code markings. Bar code markings, when specified (see 6.2), shall be in accordance with MIL-STD-129.

5.4.2 Polyethylene packages. Each polyethylene package (see 5.1) shall have the nomenclature, the national stock number, the size and length of the skirt, and the quantity contained therein legibly printed, stamped, or bar coded in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.4.3 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label, 5 inches by 4 inches. The words "MIXED NSN'S" shall be plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The skirts covered by this specification are intended to be worn as a part of the service uniform worn by female personnel of the Department of the Air Force.

6.2 Ordering data

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Class, size and length required (see 1.2).

c. When a first article is required (see 3.2 and 6.4).

d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

e. When weather-resistant fiberboard containers are required (see 5.2).

f. When palletization is required (see 5.3).

g. When bar code markings are required (see 5.4).

6.2.2 Naphthalene flakes. The naphthalene flakes requirement is not applicable when Government furnished material for the class 1 skirt has been mothproof treated (see 5.1.1).

6.3 Samples. For access to guide samples of the end item and shade samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article inspection is required, the item should be a first article sample, inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should consist of one skirt. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first article. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key word) listing.

Skirt, women's
Uniform, service

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Air Force - 11

Reviewer:
Air Force - 82, 99
DLA - CT

Preparing activity:
Air Force - 11

Project No. 8410-F674

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

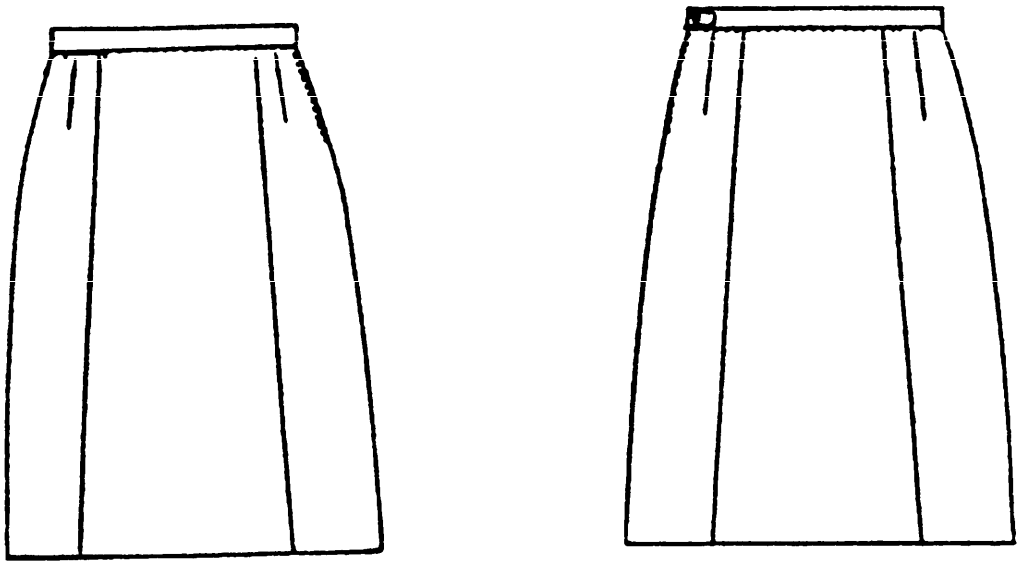

FRONT BACK

FIGURE 2. Front and back views of skirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

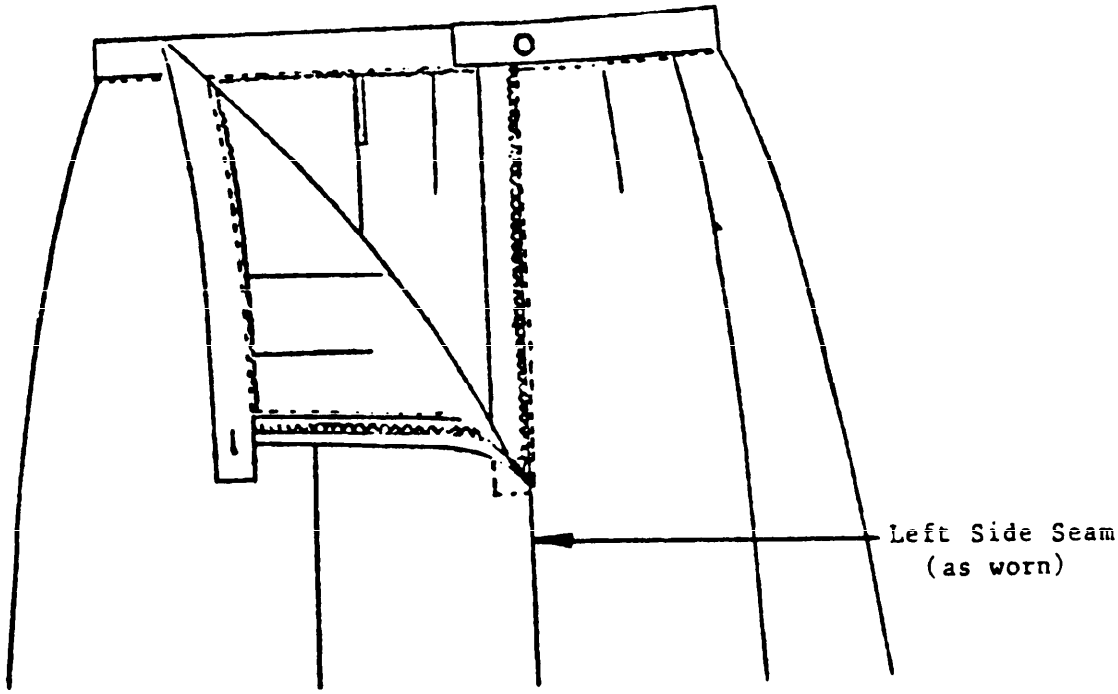


FIGURE 3. Placket of skirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE
ASD/ENES
Wright-Patterson AFB OH 45433-6503

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENES
Wright-Patterson AFB OH 45433-6503

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-83234C(USAF)	Skirts, Women's, Blue

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE. ASD/ENES OVERPRINT, JAN 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.