MILITARY SPECIFICATION

TACHOMETER, RATE, COMPUTER: 11732700

This Amendment forms a part of Military Specification MIL-T-48460B (An) dated 30 June 1981, and is approved for use within the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

2, Delete INAPPLICABLE and substitute "APPLICABLE DOCUMENTS".

PAGE 3

3.3.1, Delete in its entirety and substitute:

3.3.1 Output voltaqe linearity. With the output load in figure 1 and input conditions in table I applied, the output voltage and linearity tolerance shall be as specified in table I (see 4.6.2.1)."

PAGE 4

Figure 2, delete in its entirety and substitute:

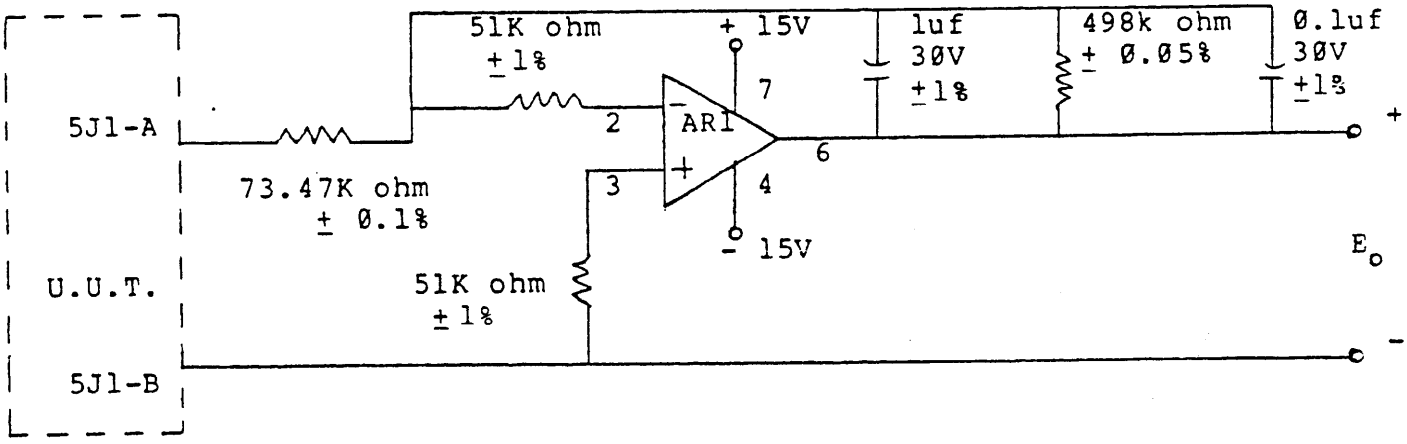

NOTES: Resisters per MIL-R-55182
Capacitors per MIL-C-83421
AR1 is LM107H\883

FIGURE 2. Output load for ripple measurement.

FSC 1220

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

PAGE 4

TABLE I. Delete in its entirety and substitute:

TABLE I - Output voltage accuracy

Item	Input Shaft Rate Milliradians/Sec	Output Voltage (E_o) Millivolts (mv)	Linearity Tolerance mv	% Ripple Tolerance p-p
1	589	589	5	-
2	59	59	1	6
3	-589	-589	5	-
4	-59	-59	1	6

PAGE 5

3.3.3 Delete in its entirety and substiture:

3.3.3 Rest output. With the assembly input shaft at rest, the output voltage shall be no greater than ± 0.5 mV (see 4.6.2.3)"

3.3.4, line 2, delete "two inch-pounds" and substitute "2 inch pounds".

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

Figure 3, Delete in its entirety and substitute:

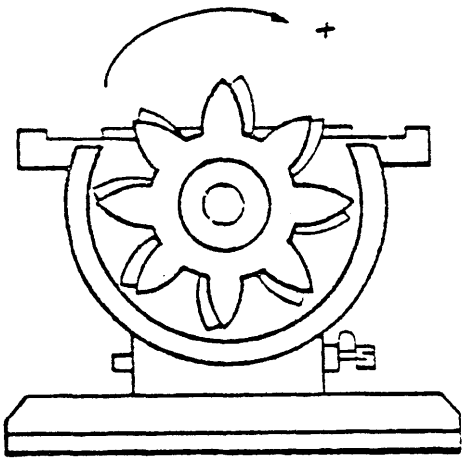

FIGURE 3. Positive shaft rotation.

Custodian:
Army - AR

Preparing activity
Army - AR

(Project 1220-A363)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.