INCH-POUND

MIL-T–48460B (AR)
AMENDMENT 2
20 JUNE 1998
SUPERSEDING
AMENDMENT 1
29 APRIL 1988

MILITARY SPECIFICATION

TACHOMETER, RATE, COMPUTER: 11732700

MIL-T-48460 was inactivated after 13 February 1997 for new design.

This amendment forms a part of MIL-T-48460B (AR), dated 30 JUNE 1981, and is approved for use by the US Army Armament, Research, Development, and Engineering Center, and is available for use by all Departments and Agency of the Department of Defense.

PAGE 1

* 2: Delete “APPLICABLE” and substitute “APPLICABLE DOCUMENTS”.

PAGE 2

2.1: Add “(REF)” to the following drawing numbers as shown:

“11750201 (REF)
11821748 (REF)
11821411 (REF)
11821457 (REF)
11821458 (REF)
11821461 (REF)
11833718 (REF)
11823404 (REF)
11821688 (REF)”

PAGE 3

* 3.3.1: Delete in its entirety and substitute:

“3.3.1 Output voltage linearity. With the output load in figure 1 and input conditions in table I applied, the output voltage and linearity tolerance shall be as specified in table I (see 4.6.2.1).”

AMSC N/A FSC 1220

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

PAGE 3

Figure 1: Delete in its entirety and substitute:

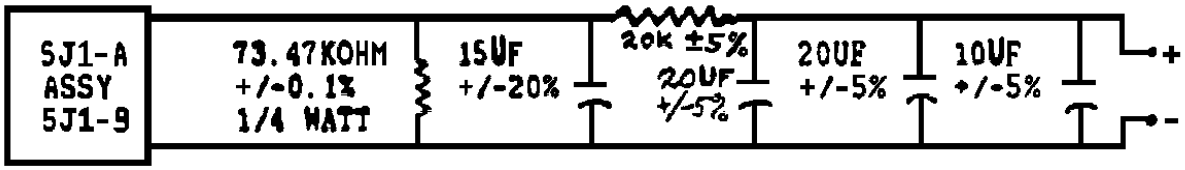

Table I: Delete in its entirety and substitute:

TABLE I. OUTPUT VOLTAGE ACCURACY.

LINEARITY TOLERANCE, MV
5 (9.4 AT + 125°F, 13.8 AT -25°F)
1 (1.4 AT +125°F, 1.8 AT -25°F)
5 (9.4 AT + 125°F, 13.8 AT -25°F)
1 (1.4 AT +125°F, 1.8 AT -25°F)

PAGE 4

Figure 2: Delete in its entirety and substitute:

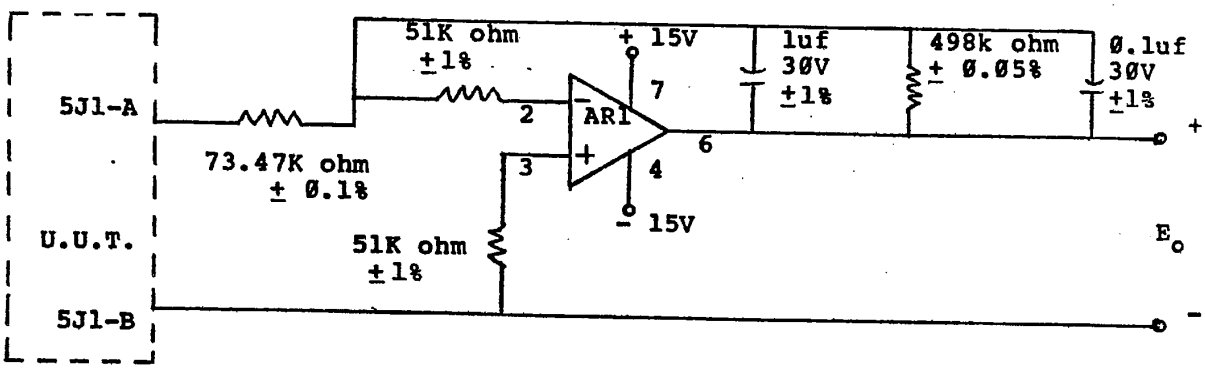

NOTES: Resisters per MIL-R-55182
Capacitors per MIL-C-83421
AR1 is LM10H/883

Figure 2. Output load for ripple measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

PAGE 4

* Table I: Delete in its entirety and substitute the following:

TABLE I. Output voltage accuracy

Item	Input Shaft Rate Milliradians/Sec	Output Voltage (E_o) Millivolts (mv)	Linearity Tolerance mv	% Ripple Tolerance p-p
1	589	589	5	-
2	59	59	1	6
3	-589	-589	5	-
4	-59	-59	1	6

PAGE 5

* 3.3.3: Delete in its entirety and substitute:

"3.3.3 Rest output. With the assembly input shaft at rest, the output voltage shall be no greater than +/- mV (see 4.6.2.3)."

* 3.3.4, line 2: Delete "two inch-pounds" and substitute "2 inch pounds".

* Figure 3: Delete in its entirety and substitute the following:

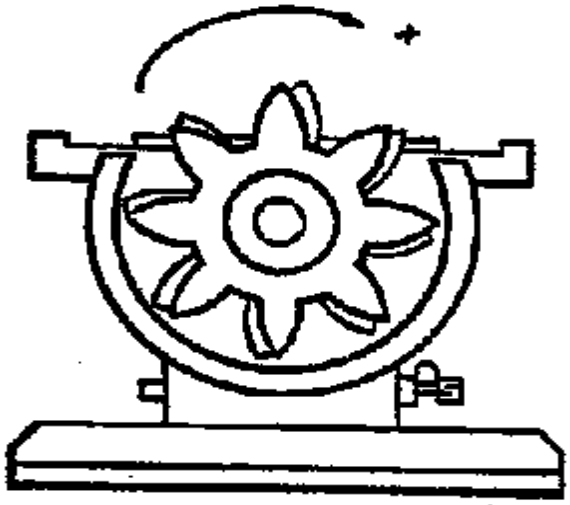

FIGURE 3. Positive shaft rotation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

PAGE 9

TABLE II. First article tests.:

Item 11: Delete “11 Altitude 3.5.6 4.6.3.2” and substitute “11 Altitude 3.5.6 4.6.3.7”.

PAGE 12

4.6.1: Delete in its entirety and substitute:

“4.6.1 Test equipment. The test equipment in table VI may be used where specified to perform the required test. If alternate test equipment is to be used, the designs shall be submitted for review and approval to U.S. Army TACOM ARDEC, Picatinny Arsenal, NJ 07806-5000 ATTN: AMSTA-AR-QAC-F.”

NOTE: The margins of this amendment are marked with asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army – AR

Preparing activity:
Army – AR

(Project 1220-A456)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.