INCH-POUND

MIL DTL-16878/3C
11 August 2000
SUPERSEDING
MIL-W-16878/3B(NAVY)
11 September 1992

DETAIL SPECIFICATION SHEET

WIRE, ELECTRICAL, POLYVINYL CHLORIDE (PVC) INSULATED, 105 °C, 3000 VOLTS (NOT FOR NAVY SHIPBOARD USE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-16878G.

REQUIREMENTS.

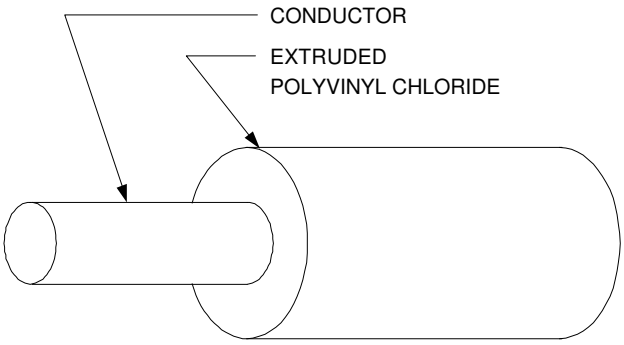

FIGURE 1. Wire configuration.

Note: Not for Navy shipboard use or use in aerospace applications.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Wire configuration and dimensions.

PIN [1/]	Wire size	Stranding	Conductor		Conductor diameter (nominal) (inch)	Finished wire diameter (inch)	
			Material [2/, 3/]	Coating		Min	Max
M16878/3BAA*	32	1 X 32	Copper	Tin	.0080	.024	.030
M16878/3BEA*	24	1 X 24	Copper	Tin	.0201	.071	.086
M16878/3DEA*	24	1 X 24	H.S.C.A	Silver	.0201	.071	.086
M16878/3CEA*	24	1 X 24	C.C. steel	Tin	.0201	.071	.086
M16878/3BEB*	24	7 X 32	Copper	Tin	.0240	.075	.090
M16878/3DEB*	24	7 X 32	H.S.C.A	Silver	.0240	.075	.090
M16878/3BEE*	24	19 X 36	Copper	Tin	.0260	.075	.090
M16878/3DEE*	24	19 X 36	H.S.C.A	Silver	.0260	.075	.090
M16878/3BFA*	22	1 X 22	Copper	Tin	.0254	.075	.091
M16878/3DFA*	22	1 X 22	H.S.C.A	Silver	.0254	.076	.091
M16878/3CFA*	22 [4/]	1 X 22	C.C. steel	Tin	.0254	.076	.091
M16878/3BFB*	22	7 X 30	Copper	Tin	.0300	.081	.096
M16878/3DFB*	22	7 X 30	H.S.C.A	Silver	.0300	.081	.096
M16878/3BFE*	22	19 X 34	Copper	Tin	.0320	.081	.096
M16878/3DFE*	22	19 X 34	H.S.C.A	Silver	.0320	.081	.096
M16878/3BGA*	20	1 X 20	Copper	Tin	.0320	.083	.098
M16878/3DGA*	20	1 X 20	H.S.C.A	Silver	.0320	.083	.098
M16878/3BGB*	20	7 X 28	Copper	Tin	.0380	.089	.104
M16878/3DGB*	20	7 X 28	H.S.C.A	Silver	.0380	.089	.104
M16878/3BGE*	20	19 X 32	Copper	Tin	.0410	.089	.104
M16878/3DGE*	20	19 X 32	H.S.C.A	Silver	.0410	.089	.104
M16878/3BHA*	18	1 X 18	Copper	Tin	.0403	.091	.106
M16878/3BHB*	18	7 X 26	Copper	Tin	.0490	.100	.115
M16878/3BHE*	18	19 X 30	Copper	Tin	.0510	.100	.115
M16878/3BJA*	16	1 X 16	Copper	Tin	.0508	.102	.117
M16878/3BJE*	16	19 X 29	Copper	Tin	.0590	.110	.125
M16878/3BJF*	16	26 X 30	Copper	Tin	.0620	.113	.128
M16878/3BKA*	14	1 X 14	Copper	Tin	.0641	.115	.130
M16878/3BKE*	14	19 X 27	Copper	Tin	.0720	.123	.138
M16878/3BKH*	14	41 X 30	Copper	Tin	.0800	.131	.146
M16878/3BLA*	12 [4/]	1 X 12	Copper	Tin	.0808	.145	.159
M16878/3BLE*	12	19 X 25	Copper	Tin	.0920	.156	.171
M16878/3BLG*	12	37 X 28	Copper	Tin	.0890	.153	.168
M16878/3BLJ*	12	65 X 30	Copper	Tin	.0980	.062	.177
M16878/3BMA*	10 [4/]	1 X 10	Copper	Tin	.1019	.166	.181
M16878/3BMG*	10	37 X 26	Copper	Tin	.1110	.175	.190
M16878/3BMK*	10	105 X 30	Copper	Tin	.1270	.191	.206

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Wire configuration and dimensions - Continued.

PIN 1/	Wire size	Stranding	Conductor		Conductor diameter (nominal) (inch)	Finished wire diameter (inch)	
			Material 2/, 3/	Coating		Min	Max
M16878/3BNL*	8	133 X 29	Copper	Tin	.1690	.241	.256
M16878/3BPL*	6	133 X 27	Copper	Tin	.2130	.286	.301
M16878/3BRL*	4	133 X 25	Copper	Tin	.2680	.348	.368
M16878/3BSP*	2	665 X 30	Copper	Tin	.3420	.422	.442
M16878/3BTR*	1	817 X 30	Copper	Tin	.3820	.472	.492
M16878/3BUS*	0	1045 X 30	Copper	Tin	.4310	.525	.545

Notes:
1/ PIN stands for part or identifying number (see figure 2).
2/ H.S.C.A. stands for high-strength copper alloy.
3/ C.C. stands for copper-clad.
4/ Inactive for new design.

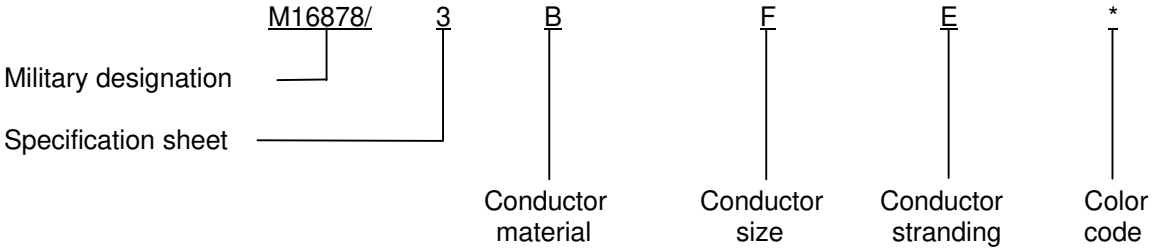

FIGURE 2. Example of PIN (see MIL-DTL-16878G).

Configuration and dimensions:	See figure 1 and table I
Operating voltage:	Up to 3000 volts
Operating temperature:	Up to 105 °C
Insulation:	Extruded polyvinyl chloride
Spark test voltage:	8.0 kV
Impulse dielectric test voltage:	12.0 kV or 8.5 kV using the 3.0 kHz spark test
Dielectric withstanding voltage:	6.0 kV
Insulation resistance:	$IR = K \log_{10} D/d$
Where:	IR = Minimum insulation resistance in megohms per 1000 feet at 20 °C K = 2,000 D = Maximum average diameter of finished wire d = Conductor diameter
Cold bend:	Condition 4 hours at -54±1 °C (see table II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:26Z
Check the source to verify that this is the current version before use.

TABLE II. Cold bend mandrel sizes.

Wire size	Cold bend mandrel diameter (inches, maximum)
32, 24, 22	2
20 through 14	3
12, 10	4.5
8	6
6, 4	10
2, 1, 0	18

Surface resistance:	Not required
Heat resistance:	Condition at 150 °C
Heat aging:	25 percent change (maximum) in 96 hours at 135 °C
Insulation tensile strength:	1800 pounds force per square inch (minimum)
Insulation elongation:	100 percent (minimum)

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issues due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Navy - SH
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 6145-2193-003)

Review activity:
Navy - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:26Z
Check the source to verify that this is the current version before use.