DOD-STD-35-19A(MI)
15 MARCH 1984
SUPERSEDING
MIL-STD-35-19(MI)
16 APRIL 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

TERMINALS AND TERMINAL STRIPS

NO DELIVERABLE DATA REQUIRED BY THIS DOCUMENT

AREA-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Terminals and Terminal Strips
Automated Engineering
Document Preparation System

DOD-STD-35-19A(MI)

1. This Military standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in Improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-19A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for terminals and terminal strips.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	9
	2.1	Issues of documents	9
	2.2	Other publications	10
	3.	DEFINITIONS	11
	4.	GENERAL REQUIREMENTS	13
	4.1	Introduction	13
	4.2	Specification Requirement Sheet (SRS)	13
	4.3	Configuration	
	4.3.1	Dimensions	13
	4.3.2	Illustrations	13
	4.4	Units of measure	13
	5.	DETAILED REQUIREMENTS	
	5.1	Introduction	15
	5.2	MSE Formats	
	5.3	Referenced documents	15
	5.4	Test matrix	15
	5.5	Tabulation	16
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	19
	5.6.1	Interrelationship of Codes	19
	5.6.2	Automatic MSE Data	19
	5.6.3	DOD-STD-35 Tables	19

TABLES

Table	I.	Title Index	2
	II.	Test matrix	16
	III.	Tabulation candidates	17

APPENDICES

Appendix	A.	Illustrations	115
	B.	Characteristic Code Index	159
		Index	165

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for terminals and terminal strips,

1.2 Purpose This military standard provides the necessary information to prepare a pacification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table 1). Data bases have been established for the generation of MSE'S for the MSE titles indicated, If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request-for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also less restrictive titles are provided to prevent exclusion of items

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
TERMINAL LUG AND SPLICE, CRIMP STYLE, ALUMINUM	029001	MIL-T-7099	ACFT, TERM LUG, STRAIGHT
		MS25435	LUG 90 DEG UPRT
		MS25436	LUG, LEFT ANGLE
		MS25437	LUG, RTANG
		MS25438	SPLICE, PERM, CRIMP STYLE, 2-WAY
		MS25439	
TERMINAL LUG AND SPLICE, CRIMP STYLE, COPPER	029002	MIL-T-7928	TERMINALS GENERAL SPEC
		MS17143	LUG, INSULATED RECT TONGUE
		MS20659	LUG, UNINSULATED, RING TONGUE
		MS21003	LUG, UNINSULATED, RECT TONGUE, TYPE I, CLASS 1 L-64 MAX
		MS2L004	LUG, UNINSULATED RECT TONGUE, TYPE I, CLASS 1 L-86 MAX
		MS21005	LUG, UNINSULATED, RECT TONGUE, TWO STUD
		MS90404	LUG, TERMINAL, TYPE 1, CLASS 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I . TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
TERMINAL LUG AND SPLICE, CRIMP STYLE, COPPER	Ø29ØØ2 (CONT)	MS21006	LUG, UNINSULATED, FLAG TONGUE
		MS21007	LUG, UNINSULATED, RECT
		MS21008	LUG, UNINSULATED, OFFSET RECT TONGUE
		MS21009	LUG, UNINSULATED, RECT TONGUE, LIPPED SIDE
		MS21010	LUG, UNINSULATED, RECT TONGUE, LIPPED END
		MS21011	LUG, UNINSULATED, RECT TONGUE, REINFORCED BOSS
		MS21012	LUG, UNINSULATED, RECT TONGUE
		MS21013	LUG, UNINSULATED, RECT TONGUE, OFF-CENTER HOLE
		MS21014	LUG, UNINSULATED, RECT TONGUE, TwO BARREL
		MS21015	LUG, UNINSULATED, SQUARE TONGUE
		MS25036	LUG, INSULATED, RING TONGUE
		MS25189	LUG, FLAG
		MS25274	CAP, WIRE END
		MS27429	SPLICE, DISCONNECT, CRIMP STYLE, INSULATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
TERMINAL LUG AND SPLICE, SCREW TYPE	029003	MIL-T-55156	Terminals SCREW TYPE, GENERAL SPECIFICATION
TERMINAL LUG AND SPLICE, SOLDERLESS	029004	MIL-T-13513	TERMINALS AND SPLICES, AUTOMOTIVE
TERMINAL LUG, SOLDER	029006	MIL-T-15659	COPPER AND PHOSPHOR BRONZE SOLDER TERMINAL
		MS35430	COPPER STAMPING ONE HOLE
		MS35431	COPPER STAMPING ONE HOLE FLAT
		MS35432	COPPER STAMPING ONE HOLE, FLAT, SLITTED
		MS35433	COPPER STAMPING ONE HOLE, CTR MOUNTING
		MS35434	COPPER STAMPING ONE HOLE, FLAG
		MS35435	COPPER STAMPING ONE HOLE, LOCATING TIP
		MS35436	COPPER STAMPING oNE HOLE, INSULATION GRIP
		MS35437	COPPER STAMPING ONE HOLE, INSULATION GRIP LOCATING
		MS35438	COPPER STAMPING ONE HOLE, INSULATION GRIP FLAG
		MS35439	COPPER STAMPING ELONGATED HOLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I . TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE NUMBER	DOCUMENT COVERAGE
TERMINAL LUG, SOLDER	029006 (CONT)	MS35440	COPPER STAMPING SLOTTED, INSULATION GRIP
		MS35441	COPPER STAMPING SLOTTED, INSULATION GRIP FLAG
		MS35442	COPPER STAMPING SLOTTED, INSULATION GRIP 45 DEGREES
		MS35443	COPPER STAMPING SLOTTED
		MS35444	COPPER STAMPING TWO HOLE
		MS35445	COPPER STAMPING TWO HOLE, FLAT, SLOTTED
		MS35446	COPPER TUBING, ONE HOLE
		MS35447	COPPER TUBING, ONE HOLE, 45 DEGREES
		MS35448	COPPER TUBING, ONE HOLE, 90 DEGREES
		MS35449	COPPER TUBING, TWO HOLE
		MS77066	PHOSPHOR BRONZE STAMPING, ONE HOLE, NO. 4-10 SCR SIZE, LOCK-ING 30 DEGREES
		MS77067	PHOSPHOR BRONZE STAMPING, TWO HOLE, LOCKING, FLAT
		MS77068	PHOSPHOR BRONZE STAMPING, TWO HOLE, LOCKING, 45 DEGREES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TERMINAL LUG, SOLDER	029006 (CONT)	MS77069	PHOSPHOR BRONZE STAMPING, ONE HOLE, NO. 10-0.250 SCR SIZE, LOCKING, 30 DEG
		MS77070	PHOSPHOR BRONZE STAMPING, ONE HOLE, NO, 4-10 SCR SIZE, LOCKING, FLAT
		MS77071	PHOSPHOR BRONZE STAMPING, ONE HOLE, LOCKING, 90 DEGREES
		MS77072	PHOSPHOR BRONZE STAMPING, ONE HOLE, NO. 4-8 SCR SIZE, LOCKING, FLAT
		MS77073	PHOSPHOR BRONZE STAMPING, ONE HOLE, NO. 10 AND 0,250 SCREW SIZE, LOCKING FLAT
		MS77074	PHOSPHOR BRONZE STAMPING) LOCKING
TERMINAL, STUD	029007	MIL-T-55155	STUD AND FEEDTHRU TYPES
		MIL-T-83454	STUD, BLIND PLATE
		MS17155	STUD, FEEDTHRU, SINGLE
		MS17156	STUD, FEEDTHRU, SINGLE, DOUBLE
		MS17157	STUD, FEEDTHRU, DOUBLE, DOUBLE
		MS17172	STUD, THREADED, DOUBLE TURRET
		MS25080	STUD, THREADED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I . TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE NUMBER	DOCUMENT COVERAGE
TERMINAL STUD GROUNDING	Ø29Ø08	MIL-T-83454	STUD, BLIND PLATE, ELEC BONDING AND GROUNDING
		MS39347	SERVICE AND GROUNDING
TERMINAL, FEEDTHROUGH	Ø29Ø09	MIL-T-55155	FEEDTHROUGH (INSULATED), STUD (INSULATED AND UNINSULATED)
TERMINAL, STRIP	Ø29Ø1Ø	MIL-T-83454	STUD, BLIND PLATE, ELEC BONDING AND GROUNDING
TERMINAL, PUSH-IN	Ø29Ø11	MIL-T-15659	LUG, SOLDER, COPPER AND PHOSPHOR BRONZE
SPLICE, CONDUCTOR, HEAT SHRINKABLE INSULATED	Ø29Ø12	MIL-S-81824	SPLICES, CRIMP, INSULATED
		NASl747	SPLICE, CONDUCTOR, HEAT SHRINKABLE
		NAS1744	SPLICE, CONDUCTOR, HEAT SHRINKABLE
		NAS1745	SPLICE, CONDUCTOR, HOT AIR SHRINKABLE
		NAS1746	SPLICE, CONDUCTOR, HEAT SHRINKABLE
TERMINAL LUG, CRIMP	Ø29Ø13	MIL-T-7099	LUG AND SPLICE, ALUMINUM
		MIL-T-7928	LUG AND SPLICE, COPPER
		MIL-T-16366	LUG AND SPLICE, BUTT, PARALLEL AND CABLE CRIMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-T-7099	Terminals; Lug and Splice, Crimp Style, Aluminum, For Aluminum Aircraft Wire
MIL-T-7928	Terminals, Lug; Splices, Conductor; Crimp Style, Copper, General Specification For
MIL-T-13513	Terminal, Lug; Splice, Conductor, Electrical, Solderless, For Automotive Use
MIL-T-15659	Terminal, Lug; Solder, Copper and Phosphor Bronze
MIL-T-16366	Terminals, Electrical Lug and Conductor Splices, Crimp Style
MIL-T-55155	Terminals, Feedthru (Insulated) and Terminals, Stud (Insulated and Noninsulated), General Specification For
MIL-T-55156	Terminals, Lug; Splices, Conductur; Screw Type, General Specification For
MIL-S-81824	Splices, Electric, Permanent, Crimp Style, Copper, Insulated, Environment -Resistant
MIL-T-83454	Terminals, Stud, Blind Plate, For Electrical Bonding and Grounding (Noninsulated), General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME10	Brinell Hardness of Metallic Materials
ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials
ASTME92	Vickers Hardness of Metallic Materials
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Terminals and Terminal Strips.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Terminals and Terminal Strips, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document,

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Terminals and Terminal Strips.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Terminals and Terminal Strips.

4.3.2 Illustrations. Illustrations applicable to Terminal and Terminal Strips are contained_ in Appendix A to this document,

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and referencesfor instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

TEST	CODE	DOCUMENTS											
		MIL-T-7099	MIL-T-7928	MIL-T-13513	MIL-T-15659	MIL-T-16366	MIL-T-55155	MIL-T-55156	MIL-S-81824	MIL-T-83454	ASTME10	ASTME18	ASTME92
Bending	1853				X					X			
Current Cycling/ Rating	1723	X	X	X				X	X	X			
Current Overload	1771			X		X							
Hardness	1945										X	X	X
Heat Aging	2007		X						X				
Tensile Strength	1905	X	X	X		X	X	X	X				
Torque	1885						X	X		X			
Voltage Drop	1703	X	X	X		X		X	X	X			
Waterproofness	2093			X		X							

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for Terminals and Terminal Strips characteristics. When-different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	MIN ACCOM WIRE DIA INCHES	1564	MAX ACCOM WIRE DIA INCHES	1573	MIN ACCOM WIRE DIA MILLIMETER
1574	MAX ACCOM WIRE DIA MILLIMETER	1568	MIN ACCOM WIRE AWG	1570	MAX ACCOM WIRE AWG
1581	TERM STRIP TERMINALS	1638	MTG THKNS INCHES	1640	MTG THKNS MILLIMETER
1646	TERM STUD DIAMETER INCHES	1648	TERM STUD DIAMETER MILLIMETER	1650	TERM STUD SIZE NUMBER
7021	MAX WEIGHT GRAMS	7022	MAX WEIGHT OUNCES		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard-Paragraphs. The (KCI provides codes, to be entered on an that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print, The MSE will contain the exact entry as supplied with the code, except for “X” entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entires. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected, Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	O101
*COMPANY NAME/COMMAND	0102
*sTREET/BuILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1O04
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1O08
*Government DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0l02.
0103	0103.
0l04	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT NUMBER	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	O108. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE. PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER. PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATION)	1600
CLASS (DESIGNATION)	1602
STYLE (DESIGNATION)	1604
MOUNTING (DESIGNATION)	1606
COLOR (DESIGNATION)	1608
CONDUCTOR MATERIAL (DESIGNATION)	1610
SLEEVE MATERIAL AND FINISH (DESIGNATION)	1612
STUD MATERIAL AND FINISH (DESIGNATION)	1614
CURRENT RATING	
MAXIMUM (AMPERES)	1563

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1600	TYPE 1600 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1602	CLASS 1602 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1604	STYLE 1604 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1606	MOUNTING 1606 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1608	COLOR 1608 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1610	CONDUCTOR MATERIAL 1610 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1612	SLEEVE MATERIAL AND FINISH 1612 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1614	STUD MATERIAL AND FINISH 1614 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
l563	CURRENT RATING. THE MAXIMUM CURRENT RATING SHALL BE 1563 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION)	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL -DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
CONDUCTOR ACCOMMODATION (WIRE FACILITY)	
WIRE SIZE (SELECT ONE)	
DIAMETER (SELECT ONE)	
U.S. (SELECT ONE)	
MINIMUM (INCHES)	1562
MAXIMUM (INCHES)	1564

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
1562	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE TERMINAL SHALL ACCEPT WIRE(S) NOT LESS THAN 1562 INCH(S) IN DIAMETER.
1564	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE TERMINAL SHALL ACCEPT WIRE(S) NOT GREATER THAN 1564 INCH(S) IN DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
U.S. (CONT)	
NOMINAL (INCHES)	1566
SI (SELECT ONE)	
MINIMUM (MILLIMETERS)	1573
MAXIMUM (MILLIMETERS)	11574
NOMINAL (MILLIMETERS)	1575
AWG SIZE (SELECT ONE)	
MINIMUM (AWG)	1568
MAXIMUM (AWG)	1570
NOMINAL (AWG)	1572
CRIMPING TOOL	
PART (NUMBER)	1580
VENDOR (NAME)	1642
PER DOCUMENT (DOC DES)	1644

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1566	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE NOMINAL DIAMETER WIRE(S) THAT THE TERMINAL SHALL ACCEPT SHALL BE 1566 INCH(S).
1573	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE TERMINAL SHALL ACCEPT WIRE(S) NOT LESS THAN 1573 MILLIMETER(S) IN DIAMETER.
1574	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE TERMINAL SHALL ACCEPT WIRE(S) NOT GREATER THAN 1574 MILLIMETER(S) IN DIAMETER.
1575	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE NOMINAL DIAMETER WIRE(S) THAT THE TERMINAL SHALL ACCEPT SHALL BE 1575 INCH(S).
1568	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE TERMINAL SHALL ACCEPT WIRE(S) NOT LESS THAN SIZE 1568 AWG.
1570	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE TERMINAL SHALL ACCEPT WIRE(S) NOT GREATER THAN SIZE 1570 AWG.
1572	CONDUCTOR ACCOMMODATION (WIRE FACILITY). THE NOMINAL SIZE WIRE(S) THAT THE TERMINAL SHALL ACCEPT SHALL BE 1572 AWG.
	CRIMPING TOOL.
1580	THE PART NUMBER SHALL BE 1580.
1642	THE VENDOR SHALL BE 1642.
1644	THE ITEM(S) SHALL BE IN ACCORDANCE WITH 1644.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MOUNTING STRUCTURE	
THICKNESS (SELECT ONE)	
(INCHES)	1638
(MILLIMETERS)	1640
TEMPERATURE	
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
TERMINAL STRIP TERMINALS	
(NUMBER)	1581
TERMINAL STUD SIZE (SELECT ONE)	
DIAMETER (SELECT ONE)	
(INCHES)	1646
(MILLIMETERS)	1648
SIZE (NUMBER)	1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1638	MOUNTING STRUCTURE. THE THICKNESS SHALL BE 1638 INCH(S).
1640	MOUNTING STRUCTURE. THE THICKNESS SHALL BE 1640 MILLIMETER(s).
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATuRE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
1581	TERMINAL STRIP TERMINALS. THE TERMINAL STRIP SHALL CONSIST OF 1581 TERMINAL(S).
1646	TERMINAL STUD SIZE. THE DIAMETER SHALL BE 1646 INCH(S).
1648	TERMINAL STUD SIZE. THE DIAMETER SHALL BE 1648 MILLIMETER(S).
1650	TERMINAL STUD SIZE. THE SIZE SHALL BE 1650.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
AXIAL LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1934
AS FOLLOWS:	1935
MAXIMUM INSULATION MOVEMENT (SELECT ONE)	
(INCHES)	1936
(MILLIMETERS)	1937
NO EVIDENCE OF DAMAGE, ARCING, OR BREAKDOWN.	1939

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT.	THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT.	THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT.	THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT.	THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
1934	AXIAL LOAD.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1934.
1935	AXIAL LOAD.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1936	MOVEMENT OF THE INSULATION IN EITHER DIRECTION	SHALL BE NOT GREATER THAN 1936 INCH(S).
1937	MOVEMENT OF THE INSULATION IN EITHER DIRECTION	SHALL BE NOT GREATER THAN 11937 MILLIMETER(S).
1939	THERE SHALL BE NO EVIDENCE OF DAMAGE, ARCING, OR BREAKDOWN.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AXIAL LOAD (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922
PER MIL-T-7928.	1924
MINIMUM APPLIED FORCE (SELECT ONE)	
(POUNDS)	1926
(NEWTONS)	1927
MAXIMUM TENSILE MACHINE RATE OF TRAVEL (SELECT ONE)	
(INCHES PER MINUTE)	1928
(MILLIMETERS PER MINUTE)	1929
BENDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1858
NO EVIDENCE OF CRACKING OF THE BASE METAL, FLAKING OR PEELING OF FINISH.	1860
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1852
PER DOCUMENT (DOC DES)	1853

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1922	AXIAL LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1922.
1924	AXIAL LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-7928.
1926	THE APPLIED FORCE SHALL BE NOT LESS THAN 1926 POUND(S).
1927	THE APPLIED FORCE SHALL BE NOT LESS THAN 1927 NEWTON(S).
1928	THE TENSILE MACHINE RATE OF TRAVEL SHALL BE NOT GREATER THAN 1928 INCH(S) PER MINUTE.
1929	THE TENSILE MACHINE RATE OF TRAVEL SHALL BE NOT GREATER THAN 1929 MILLIMETER(S) PER MINUTE.
1858	BENDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1858.
1860	BENDING. THERE SHALL BE NO EVIDENCE OF CRACKING OF THE BASE METAL, FLAKING, OR PEELING OF FINISH*
1852	BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852,
1853	BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1853,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BENDING (CONT)	
PER DOCUMENT (DOC DES) (CONT)	
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	1855
(MILLIMETERS)	1857
BEND FORCE (SELECT ONE)	
(POUNDS)	1859
(NEWTONS)	1861
BENDS (NUMBER)	1863
BLOCKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1871
NO STICKING TOGETHER.	1873
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1875
PER MIL-S-81824.	1877
CONDITIONING DURATION (HOURS)	1878
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1879
CONDITIONING TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1881

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1855	THE MANDREL DIAMETER SHALL BE 1855 INCH(S).
1857	THE MANDREL DIAMETER SHALL BE 1857 MILLIMETER(S).
1859	THE BEND FORCE SHALL BE 1859 POUND(S).
1861	THE BEND FORCE SHALL BE 1861 NEWTON(S).
1863	THERE SHALL BE 1863 BEND(S).
1871	BLOCKING. THE REQuIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1871.
1873	BLOCKING. THERE SHALL BE NO STICKING TOGETHER.
1875	BLOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1875.
1877	BLOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81824.
1878	DURATION OF CONDITIONING SHALL BE 1878 HOUR(S).
1879	THE CONDITIONING TEMPERATURE SHALL BE 1879 DEGREES CELSIUS.
1881	THE CONDITIONING TEMPERATURE TOLERANCE SHALL BE 1881 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPRESSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1872
AS FOLLOWS:	1883
NO FRACTURE OR FLATTENING.	1874
MINIMUM INITIAL TO FINAL TEETH HEIGHT (PERCENT)	1876
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1864
PER MIL-T-15659.	1866
DURATION OF COMPRESSION (HOURS)	1868
CONDUCTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1794
MINIMUM CONDUCTIVITY (PERCENT PER INTERNATIONAL ANNEALED COPPER STANDARD)	1796
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1788

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1872	COMPRESSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.
1883	COMPRESSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1874	THE TEETH OF LOCKING-TYPE TERMINALS SHALL NOT FRACTURE OR FLATTEN.
1876	HEIGHT OF TEETH AFTER THE TEST SHALL BE NOT LESS THAN 1876 PERCENT OF INITIAL HEIGHT.
1864	COMPRESSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1864.
1866	COMPRESSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-15659.
1868	DURATION OF THE COMPRESSION SHALL BE 1868 HOUR(S).
1794	CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1794.
1796	CONDUCTIVITY. CONDUCTIVITY SHALL BE NOT LESS THAN 1796 PERCENT PER INTERNATIONAL ANNEALED COPPER STANDARD (IACS).
1788	CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDUCTIVITY (CONT)	
TEST METHODS (CONT)	
USE SUITABLE CONDUCTIVITY METER.	1790
CURRENT CYCLING/RATING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
AS FOLLOWS:	1741
MINIMUM TERMINAL TO CONDUCTOR TEMPERATURE DIFFERENTIAL (DEGREES CELSIUS)	1743
MAXIMUM TERMINAL TO CONDUCTOR TEMPERATURE DIFFERENTIAL (DEGREES CELSIUS)	1744
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1747
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1722
PER DOCUMENT (DOC DES)	1723
TEST CURRENT (AMPERES)	1734
TEST CURRENT TOLERANCE (PERCENT)	1735
CYCLES (NUMBER)	1730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1790	CONDUCTIVITY. TESTING SHALL BE PERFORMED USING ANY SUITABLE CONDUCTIVITY METER.
l742	CURRENT CYCLING/RATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742,
1741	CURRENT CYCLING/RATING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1743	THE TERMINAL TO CONDUCTOR TEMPERATuRE DIFFERENTIAL SHALL BE NOT LESS THAN 1743 DEGREES CELSIUS.
1744	THE TERMINAL TO CONDUCTOR TEMPERATuRE DIFFERENTIAL SHALL BE NOT GREATER THAN 1744 DEGREES CELSIUS.
1747	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1747 MILLIVOLT(S).
1722	CURRENT CYCLING/RATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1722.
1723	CURRENT CYCLING/RATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1723.
1734	TEST CURRENT SHALL BE 1734 AMPERE(S).
1735	TEST CURRENT TOLERANCE SHALL BE 1735 PERCENT.
1730	THERE SHALL BE 1730 TEST CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT CYCLING/RATING (CONT)	
CYCLES (CONT)	
DURATION OF APPLICATION (MINUTES)	1732
DURATION AT NO LOAD (MINUTES)	1736
CURRENT OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1780
AS FOLLOWS:	1781
MAXIMUM TERMINAL TO CONDUCTOR TEMPERATURE DIFFERENTIAL (DEGREES CELSIUS)	1782
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1785
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1770
PER DOCUMENT (DOC DES)	1771
INITIAL TEST CURRENT (AMPERES)	1774
TEST CURRENT TOLERANCE (PERCENT)	1772
DURATION OF CURRENT APPLICATION (HOURS)	1773
HIGH TEST CURRENT (AMPERES)	1775
TEST CURRENT TOLERANCE (PERCENT)	1777

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1732	DURATION OF CYCLE WITH A LOAD SHALL BE 1732 MINUTE(S).
1736	DURATION OF CYCLE AT NO LOAD SHALL BE 1736 MINUTE(S).
1780	CURRENT OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1780.
1781	CURRENT OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1782	THE TERMINAL TO CONDUCTOR TEMPERATURE DIFFERENTIAL SHALL BE NOT GREATER THAN 1782 DEGREES CELSIUS.
1785	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1785 MILLIVOLT(S).
1770	CURRENT OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1770.
1771	CURRENT OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1771.
1774	INITIAL TEST CURRENT SHALL BE 1774 AMPERE(S).
1772	INITIAL TEST CURRENT TOLERANCE SHALL BE 1772 AMPERE(S).
1773	INITIAL TEST CURRENT SHALL BE APPLIED FOR 1773 HOUR(S).
1775	HIGH TEST CURRENT SHALL BE 1775 AMPERE(S).
1777	HIGH TEST CURRENT TOLERANCE SHALL BE 1777 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT OVERLOAD (CONT)	
HIGH TEST CURRENT (AMPERES) (CONT)	
DURATION OF CURRENT APPLICATION (MINUTES)	1779
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITIUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1779	HIGH TEST CURRENT SHALL BE APPLIED FOR 1779 MINUTE(S).	
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.	
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDECNE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).	
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.	
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.	
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.	
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.	
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS]	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE (S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENTS(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLATAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
ENDURANCE (ENGAGING AND DISENGAGING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2080
AS FOLLOWS:	2085
NO EVIDENCE OF PHYSICAL DAMAGE.	2081
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	2083
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072
PER MIL-T-7928.	2073
MATING CYCLES (NUMBER)	2074
MATING CYCLE RATE (CYCLES PER MINUTE)	2076

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
2080	ENDURANCE (ENGAGING AND DISENGAGING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2080.
2085	ENDURANCE (ENGAGING AND DISENGAGING). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2081	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2083	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 2083 MILLIVOLT(S).
2072	ENDURANCE (ENGAGING AND DISENGAGING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.
2073	ENDURANCE (ENGAGING AND DISENGAGING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-7928.
2074	THERE SHALL BE 2074 MATING CYCLE(S).
2076	THE MATING CYCLE RATE SHALL BE 2076 CYCLES PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (EXTERNAL FLAME)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2912
AS FOLLOWS:	2913
MAXIMUM DURATION OF VISIBLE FLAME (SECONDS)	2914
NO EVIDENCE OF VIOLENT BURNING.	2915
SELF-EXTINGUISHING.	2916
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2902
PER MIL-STD-202, METHOD 111.	2903
POINT OF IMPINGEMENT OF APPLIED FLAME _____	2904
DIRECTION OF AXIS OF FLAME _____	2906
DURATION OF FLAME APPLICATION (SECONDS)	2908
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2912	FLAMMABILITY (EXTERNAL FLAME). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2912.
2913	FLAMMABILITY [EXTERNAL FLAME). THE REQUIREMENT(S) SHALL BE AS FOLLOWS
2914	DURATION OF A VISIBLE FLAME SHALL BE NOT GREATER THAN 2914 SECOND(S).
2915	THERE SHALL BE NO EVIDENCE OF VIOLENT BURNING.
2916	THE FLAME SHALL SELF-EXTINGUISH.
2902	FLAMMABILITY (EXTERNAL FLAME). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2902.
2903	FLAMMABILITY (EXTERNAL FLAME). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 111 OF MIL-STD-202.
2904	THE POINT OF IMPINGEMENT OF THE APPLIED FLAME SHALL BE 2904.
2906	THE DIRECTION OF AXIS OF FLAME SHALL BE 2906.
2908	THE DURATION OF APPLICATION OF FLAME SHALL BE 2908 SECOND(S).
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1954
AS FOLLOWS:	1959
HARDNESS TESTER(NAME)	1955
SCALE (LETTER)	1957
MINIMUM HARDNESS (NUMBER)	1956

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
1954	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1954.
1959	HARDNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1955	THE HARDNESS TESTER SHALL BE 1955.
1957	SCALE 1957 SHALL APPLY.
1956	THE HARDNESS SHALL BE NOT LESS THAN 1956.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
HARDNESS TESTER (NAME) (CONT)	
MAXIMUM HARDNESS (NUMBER)	1958
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1944
PER DOCUMENT (DOC DES)	1945
HEAT AGING (ACCELERATED AGING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2026
AS FOLLOWS:	2027
NO EVIDENCE OF PHYSICAL DAMAGE, ARCING, OR BREAKDOWN.	2029
DISCOLORATION OF INSULATION PERMITTED.	2030
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	2041
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2006
PER DOCUMENT (DOC DES)	2007

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1958	THE HARDNESS SHALL BE NOT GREATER THAN 1958,
1944	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1944.
1945	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1945,
2026	HEAT AGING (ACCELERATED AGING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2026.
2027	HEAT AGING (ACCELERATED AGING). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2029	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE, ARCING, OR BREAKDOWN.
2030	DISCOLORATION OF INSULATION MATERIAL SHALL BE PERMITTED.
2041	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 2041 MILLIVOLT(S).
2006	HEAT AGING (ACCELERATED AGING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2006.
2007	HEAT AGING (ACCELERATED AGING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2007.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEAT AGING (ACCELERATED AGING) (CONT)	
PER DOCUMENT (DOC DES) (CONT)	
CONDITIONING DURATION (HOURS)	2008
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	2010
TEMPERATURE TOLERANCE (DEGREES CELSIUS	2013
COOLING DURATION (HOURS)	2016
COOL TO (DEGREES CELSIUS)	2018
TOLERANCE (DEGREES CELSIUS)	2021
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2008	DURATION OF CONDITIONING SHALL BE 2008 HOUR(S).
2010	THE CONDITIONING TEMPERATURE SHALL BE 2010 DEGREES CELSIUS.
2013	THE CONDITIONING TEMPERATURE TOLERANCE SHALL BE 2013 DEGREES CELSIUS.
2016	THE COOLING DURATION SHALL BE 2016 HOUR(S).
2018	THE ITEM(S) SHALL BE COOLED TO 2018 DEGREES CELSIUS.
2021	THE COOLED TO TEMPERATURE TOLERANCE SHALL BE 2021 DEGREES CELSIUS.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGHOM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
MAXIMUM VOLTAGE DROP AT HIGH HUMIDITY (MILLIVOLTS)	2033
MAXIMUM VOLTAGE DROP AFTER DRYING (MILLIVOLTS)	2034
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
2033	THE VOLTAGE DROP AT HIGH HUMIDITY SHALL BE NOT GREATER THAN 2033 MILLIVOLT(S).
2034	THE VOLTAGE DROP AFTER DRYING SHALL BE NOT GREATER THAN 2034 MILLIVOLT(S).
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 (HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-202, METHOD 103. (CONT)	
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 1104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMuM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 BOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN INSULATED PARTS AND GROUND.	1523
LOW TEMPERATURE CRIMP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1982
AS FOLLOWS:	1983
NO EVIDENCE OF RUPTURE OR CRACKING.	1984
NO ARCING OR BREAKDOWN.	1987
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1962
PER MIL-T-7928.	1963
CRIMP PERFORMED AT (DEGREES CELSIUS)	1966
TOLERANCE (DEGREES CELSIUS)	1969

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1982	LOW TEMPERATURE CRIMP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1982.
1983	LOW TEMPERATURE CRIMP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1984	THERE SHALL BE NO EVIDENCE OF RUPTURE OR CRACKING.
1987	THERE SHALL BE NO ARCING OR BREAKDOWN.
1962	LOW TEMPERATURE CRIMP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962.
1963	LOW TEMPERATURE CRIMP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-7928.
1966	THE CRIMP SHALL BE PERFORMED AT 1966 DEGREES CELSIUS.
1969	THE CRIMPING TEMPERATURE TOLERANCE SHALL BE 1969 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE CRIMP (CONT)	
PER MIL-T-7928. (CONT)	
DURATION OF CRIMP TEMPERATURE (HOURS)	1967
LOW EXPOSURE TEMPERATURE (DEGREES CELSIUS)	1972
TOLERANCE (DEGREES CELSIUS)	1975
DURATION OF LOW EXPOSURE TEMPERATURE (HOURS)	11973
METAL RELAXATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1816
AS FOLLOWS:	1817
MAXIMUM TERMINAL TO CONDUCTOR TEMPERATURE DIFFERENTIAL (DEGREES CELSIUS)	1822
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1815
MAXIMUM TERMINAL TORQUE LOAD RELAXATION TO PRESET VALUE (PERCENT)	1820
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
PER MIL-T-7099.	1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1967	DURATION OF CRIMPING TEMPERATURE SHALL BE 1967 HOUR(S).
1972	THE LOW EXPOSURE TEMPERATURE SHALL BE 1972 DEGREES CELSIUS.
1975	THE LOW EXPOSURE TEMPERATURE TOLERANCE SHALL BE 1975 DEGREES CELSIUS.
1973	DURATION OF LOW EXPOSURE TEMPERATURE SHALL BE 1973 HOUR(S).
1816	METAL RELAXATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.
1817	METAL RELAXATION THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1822	THE TERMINAL TO CONDUCTOR TEMPERATURE DIFFERENTIAL SHALL BE NOT GREATER THAN 1822 DEGREES CELSIUS.
1815	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1815 MILLIVOLT(S).
1820	THE TERMINAL TORQUE LOAD RELAXATION SHALL BE NOT GREATER THAN 1820 PERCENT OF THE PRESET VALUE DURING THE TESTS.
1802	METAL RELAXATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	METAL RELAXATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-7099.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METAL RELAXATION (CONT)	
PER MIL-T-7099. (CONT)	
INITIAL TEST CURRENT (AMPERES)	1806
DURATION OF INITIAL CURRENT APPLICATION (HOURS)	1808
FINAL TEST CURRENT (AMPERES)	1810
DURATION OF FINAL CURRENT APPLICATION (HOURS)	1812
MAXIMUM TENSILE LOAD APPLIED (SELECT ONE)	
(POUNDS)	1819
(NEWTONS)	1821
VIBRATION PER MIL-STD-202, METHOD 204, TEST CONDITION (LETTER)	1844
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	11396
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH

1806 INITIAL TEST CURRENT SHALL BE 1806 AMPERE(S).

1808 DURATION OF INITIAL TEST CURRENT APPLICATION SHALL BE 1808 HOUR(S).

1810 FINAL TEST CURRENT SHALL BE 1810 AMPERE(S).

1812 DURATION OF FINAL CURRENT APPLICATION SHALL BE 1812 HOUR(S).

1819 THE TENSILE LOAD APPLIED SHALL BE NOT GREATER THAN 1819 POUND(S).

1821 THE TENSILE LOAD APPLIED SHALL BE NOT GREATER THAN 1821 NEWTON(S).

1844 VIBRATION SHALL BE IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202, TEST CONDITION LETTER 1844.

1400 MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BA5E DOCUMENT, EXPECT 1400.

1396 MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

1394 THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE, (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
NO BLISTERED PLATING, CRACKED PLATING, OR EXPOSED BASE METAL.	1823
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENTAGE OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE	4985
STEP 7B NOT APPLICABLE,	4986

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1823	THERE SHALL BE NO EVIDENCE OF BLISTERED OR CRACKED PLATING AND THE BASE METAL SHALL BE NOT EXPOSED.
1825	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1825 MILLIVOLT(S).
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
SPECIAL CONDITIONS FOR INITIAL MEASUREMENT _____	1826
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
1826	SPECIAL CONDITIONS FOR INITIAL MEASUREMENT SHALL BE 1826.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENT(S) TO BE ADDED (NAME)	4838
SOLVENT(S) TO BE DELETED (SUBPARAGRAPH LETTER)	4835

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
PER MIL-STD-202, METHOD 215. (CONT)	
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
NO BLISTERED OR CRACKED PLATING AND BASE METAL SHALL BE NOT EXPOSED.	1827
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1828
MINIMUM TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST {SELECT ONE)	
(POUNDS)	1829
(NEWTONS)	1830

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
1827	THERE SHALL BE NO EVIDENCE OF BLISTERED OR CRACKED PLATING AND THE BASE METAL SHALL BE NOT EXPOSED.
1828	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1828 MILLIVOLT(S).
1829	TENSILE STRENGTH MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1829 POUND(S).
1830	TENSILE STRENGTH MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESSTHAN 1830 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1831

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4770 SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.

4771 SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1101 OF MIL-STD-202.

4772 TEST CONDITION LETTER 4772 SHALL APPLY.

4773 MOUNTING SHALL BE IN ACCORDANCE WITH 4773.

4765 MOUNTING SHALL BE BY THE NORMAL METHOD.

4766 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

1494 SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

1495 SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1464 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1451 THERE SHALL BE NO DISCONTINUITY DURING THE TEST.

1831 THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1831 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MINIMUM TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST (SELECT ONE)	
(POUNDS)	1832
(NEWTONS)	1833
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1832	TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1832 POUND(S).
1833	TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1833 NEWTON(S).
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1835
MINIMUM TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST (SELECT ONE)	
(POUNDS)	1838
(NEWTONS)	1839
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1471 THERE SHALL BE NO DISCONTINUITY DURING THE TEST.

1835 THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1835 MILLIVOLT(S).

1838 TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1838 POUND(S).

1839 TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1839 NEWTON(S).

1502 SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.

1500 SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.

1504 TEST CONDITION LETTER 1504 SHALL APPLY.

4686 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4685 MOUNTING SHALL BE BY THE NORMAL METHOD.

4684 MOUNTING SHALL BE IN ACCORDANCE WITH 4684,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4674 SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.

4675 SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

4672 THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.

4662 SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.

4683 SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.

4666 4666 TERMINATION(S) PER UNIT SHALL BE TESTED.

4667 TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).

4663 TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).

4664 THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.

4665 THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE" BODY.

6205 SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH (MECHANICAL STRENGTH)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1912
NO BREAKING, DISTORTION, OR WIRE PULLOUT WHEN SPECIFIED FORCE IS APPLIED.	1914
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1902
PER DOCUMENT (DOC DES)	1905
TENSILE MACHINE RATE OF TRAVEL (SELECT ONE)	
(INCHES PER MINUTE)	1906
(MILLIMETERS PER MINUTE)	1907
TENSILE MACHINE CLAMPING SURFACES MAY BE SERRATED.	1908
MINIMuM TENSILE FORCE APPLIED (SELECT ONE)	
(POUNDS)	1916
(NEWTONS)	1918
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1912	TENSILE STRENGTH (MECHANICAL STRENGTH). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912,
1914	TENSILE STRENGTH (MECHANICAL STRENGTH). THE TERMINAL(S) SHALL NOT BREAK OR DISTORT NOR SHALL THE WIRE PULL OUT WHEN THE SPECIFIED FORCE IS APPLIED.
1902	TENSILE STRENGTH (MECHANICAL STRENGTH). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1905	TENSILE STRENGTH (MECHANICAL STRENGTH). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1905.
1906	TENSILE MACHINE RATE OF TRAVEL SHALL BE 1906 INCH(S) PER MINUTE.
1907	TENSILE MACHINE RATE OF TRAVEL SHALL BE 1907 MILLIMETER(S) PER MINUTE.
1908	TENSILE MACHINE CLAMPING SURFACES MAY BE SERRATED.
1916	TENSILE FORCE APPLIED SHALL BE NOT LESS THAN 1916 POUND(S).
1918	TENSILE FORCE APPLIED SHALL BE NOT LESS THAN 1918 NEWTON(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1949
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1949	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1949 MILLIVOLT(S).
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXPECT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1890
NO EVIDENCE OF BREAKING, DISTORTION, OR OTHER DAMAGE.	1892
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1882
PER DOCUMENT (DOC DES)	1885
APPLIED TORQUE (SELECT ONE)	
(POUND-FEET)	1886
(POUND-INCHES)	1887
(NEWTON METERS)	1889
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
MAXIMUM VOLTAGE DROP AFTER TEST {MILLIVOLTS)	1893

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1890	TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1890.
1892	TORQUE. THERE SHALL BE NO EVIDENCE OF BREAKING, DISTORTION, OR OTHER DAMAGE.
11882	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1885	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1885.
1886	THE APPLIED TORQUE SHALL BE 1886 POUND-FEET.
1887	THE APPLIED TORQUE SHALL BE 1887 POUND-INCH(S).
1889	THE APPLIED TORQUE SHALL BE 1889 NEWTON METER(S).
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1893	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1893 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MINIMUM TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST (SELECT ONE)	
(POUNDS)	1894
(NEWTONS)	1895
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOUCMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1894	TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1894 POUND(S).
1895	TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1895 NEWTON(S).
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE,	1476
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1897
MINIMUM TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST (SELECT ONE)	
(POUNDS)	1909
(NEWTONS)	1911
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHODS.	4730
MOUNT PER DOCUMENT (DOC DES)	4729

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1897	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1897 MILLIVOLT(S).
1909	TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1909 POUND(S).
1911	TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1911 NEWTON(S).
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 201. (CONT)	
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
NO DISCONTINUITY DURING TEST.	1374
MAXIMUM VOLTAGE DROP AFTER TEST (MILLIVOLTS)	1915
MINIMUM TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST (SELECT ONE)	
(POUNDS)	1917
(NEWTONS)	1919

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1915	THE VOLTAGE DROP AFTER TEST SHALL BE NOT GREATER THAN 1915 MILLIVOLT(S).
1917	TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1917 POUND(S).
1919	TENSILE STRENGTH (MECHANICAL STRENGTH) AFTER TEST SHALL BE NOT LESS THAN 1919 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 2114. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
VOLTAGE DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1718
MAXIMUM VOLTAGE DROP (MILLIVOLTS)	1719
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1702
PER DOCUMENT (DOC DES)	1703
POINTS OF MEASUREMENT SHALL BE _____	1714
TEST CURRENT (AMPERES)	1711
WIRE SIZE (SELECT ONE)	
(AWG)	1727
DIAMETER (SELECT ONE)	
(INCHES)	1729
(MILLIMETERS)	1731

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
1718	VOLTAGE DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1718.
1719	VOLTAGE DROP. THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1719 MILLIVOLT(S).
1702	VOLTAGE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1703	VOLTAGE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1703.
1714	POINTS OF MEASUREMENT SHALL BE 1714.
1711	THE TEST CURRENT SHALL BE 1711 AMPERE(S).
1727	THE WIRE SIZE SHALL BE 1727 AWG.
1729	THE WIRE SIZE SHALL BE 1729 INCH(S).
1731	THE WIRE SIZE SHALL BE 1731 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERPROOFNESS (WATERSEAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2104
NO EVIDENCE OF LEAKAGE.	2106
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ___	2092
PER DOCUMENT (DOC DES)	2093
HYDROSTATIC PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2096
(KILOPASCALS)	2097
DURATION OF EXPOSURE (SELECT ONE)	
(HOURS)	2098
(MINUTES)	2100
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2104	WATERPROOFNESS (WATERSEAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2104.
2106	WATERPROOFNESS (WATERSEAL). THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2092	WATERPROOFNESS (WATERSEAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2093	WATERPROOFNESS (WATERSEAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2093.
2096	THE HYDROSTATIC PRESSURE SHALL BE 2096 POUND(S) PER SQUARE INCH.
2097	THE HYDROSTATIC PRESSURE SHALL BE 2097 KILOPASCAL(S).
2098	DURATION OF EXPOSURE SHALL BE 2098 HOUR(S).
21100	DURATION OF EXPOSURE SHALL BE 2100 MINUTE(S).
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6911
B_____	6992
C_____	6993
D_____	6994
E_____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A265)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

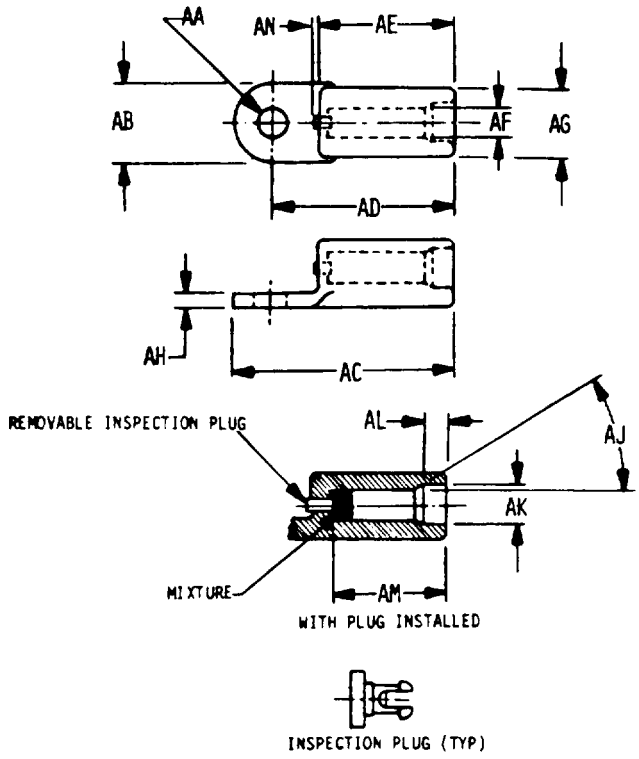

029-01-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

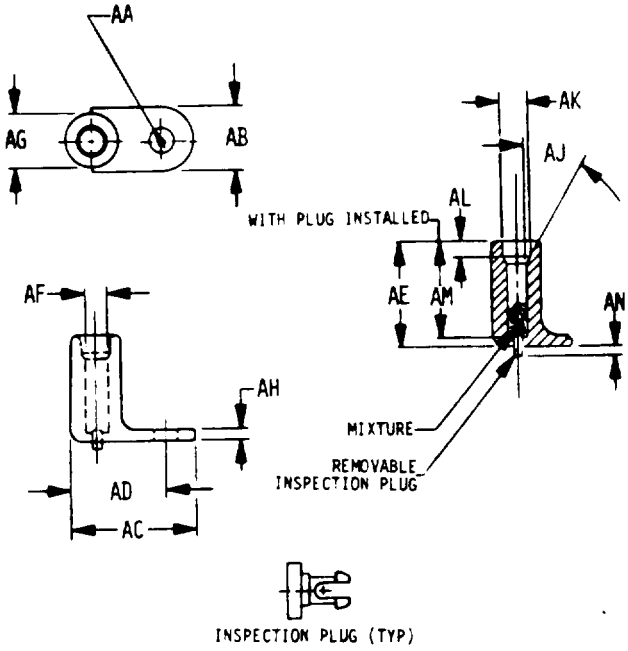

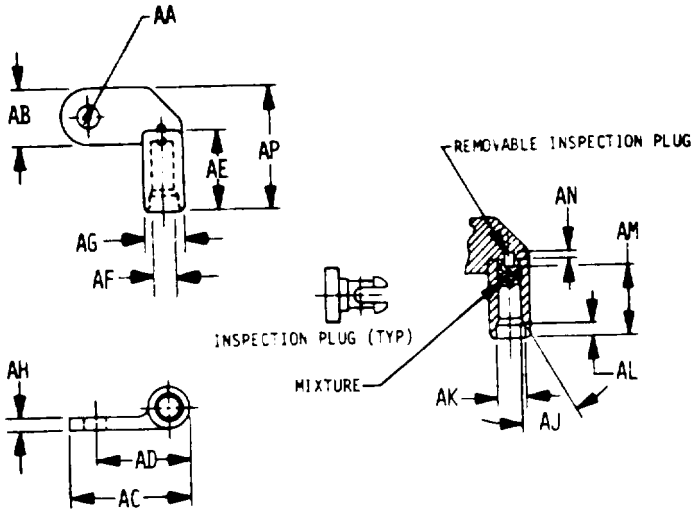


029-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

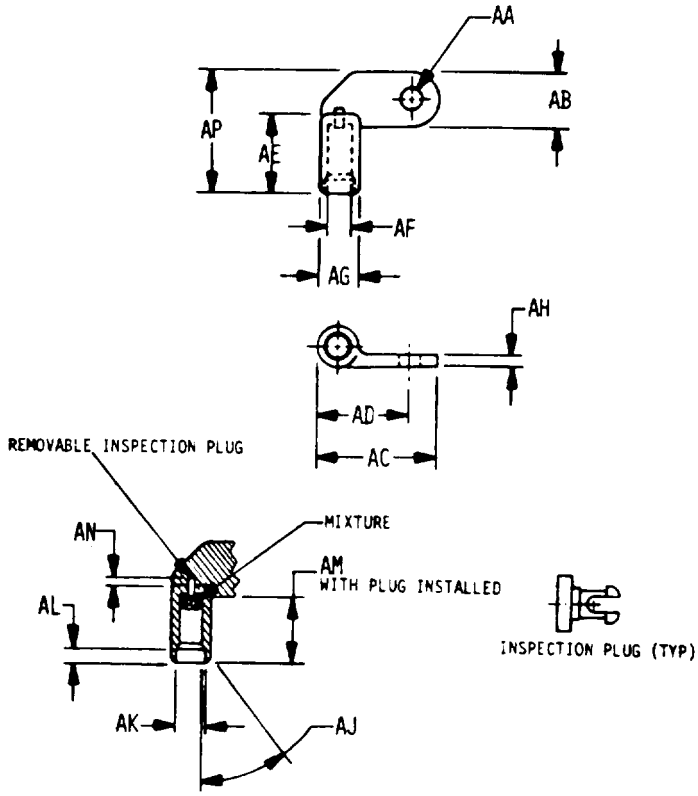


029-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

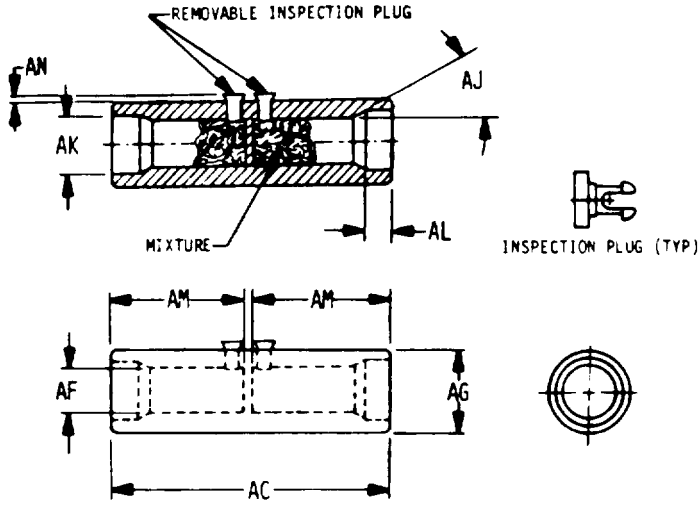


029-01-5

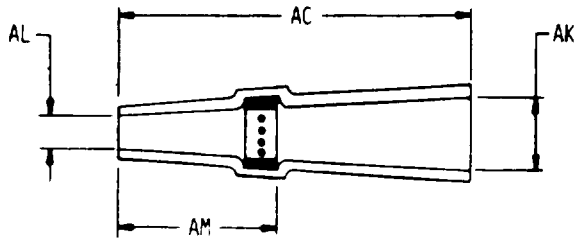


029-01-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

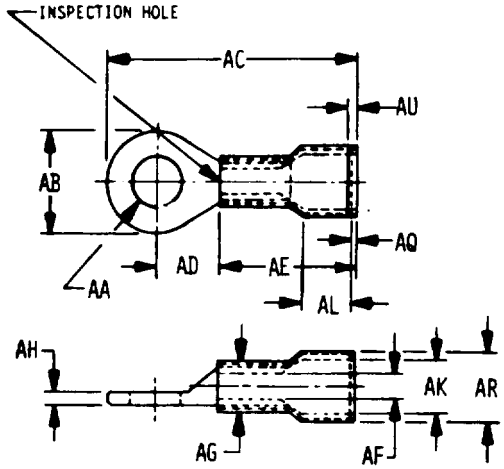

029-02-1

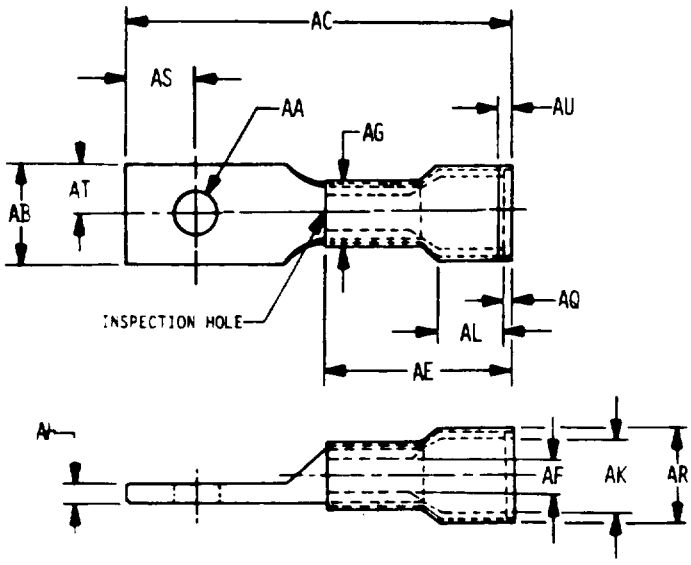


029-02-2

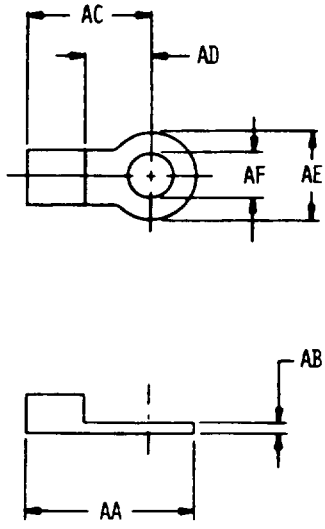


029-02-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

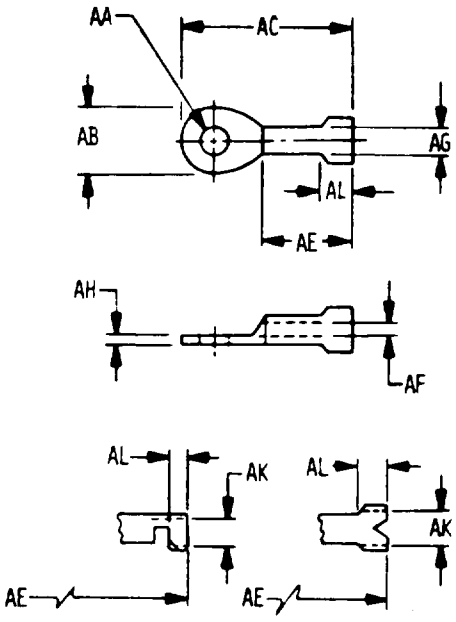


029-03-1

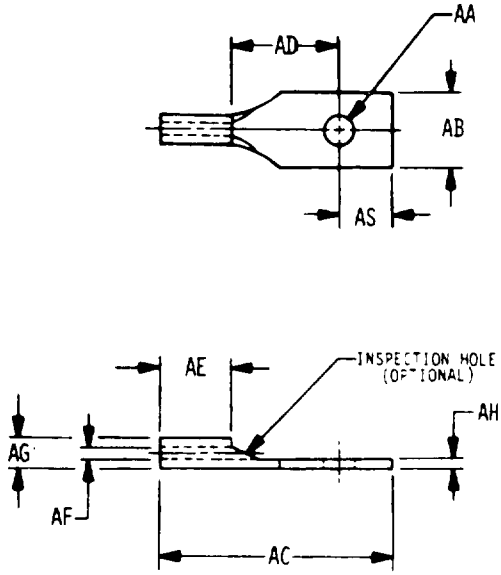

029-03-2

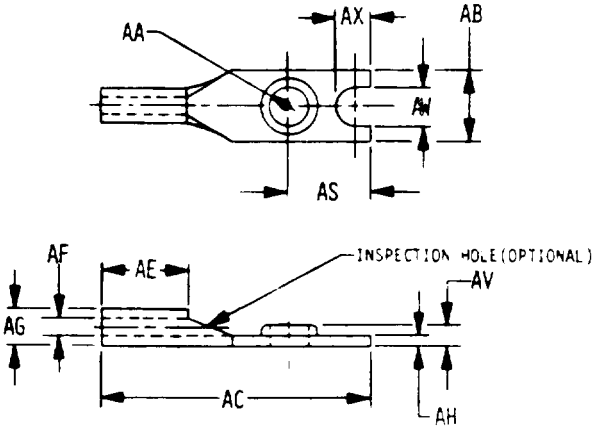


029-03-3

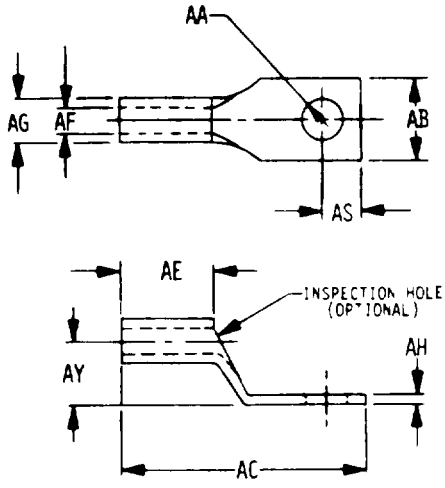


029-03-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

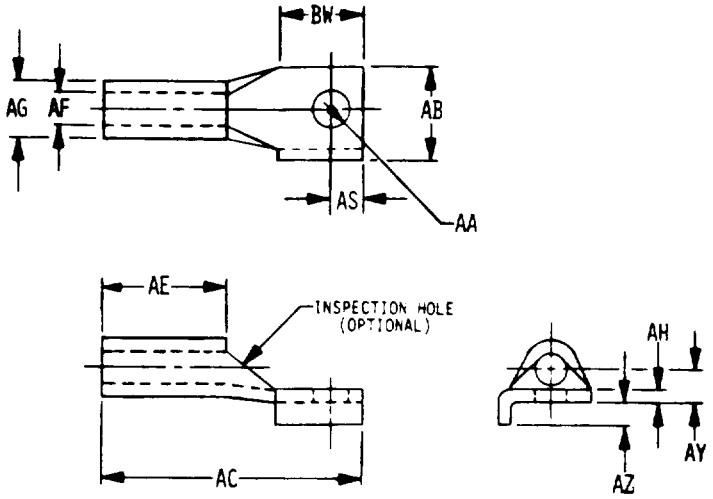


029-03-5

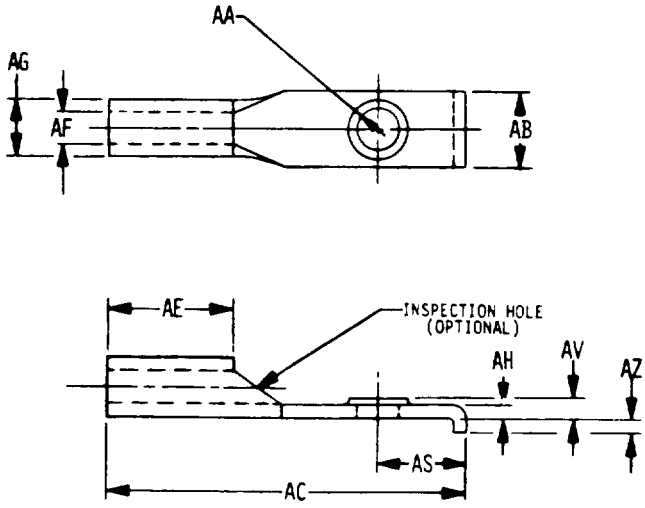


029-03-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

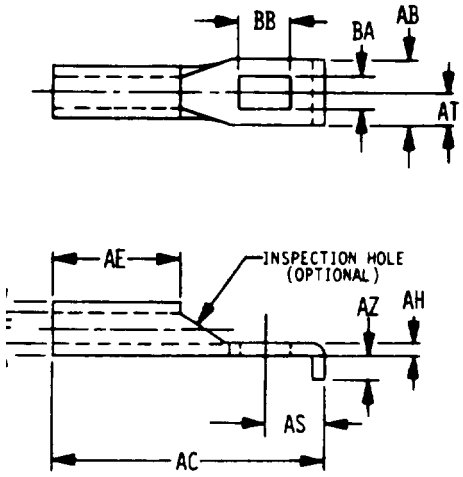

029-03-7

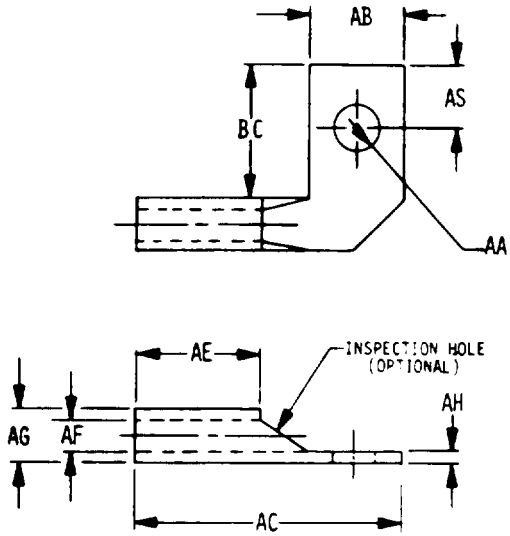


029-03-8

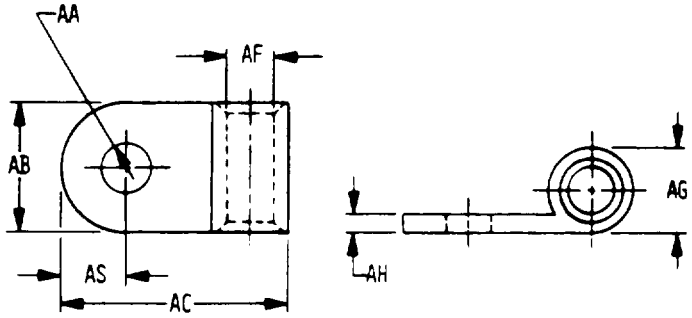



029-03-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

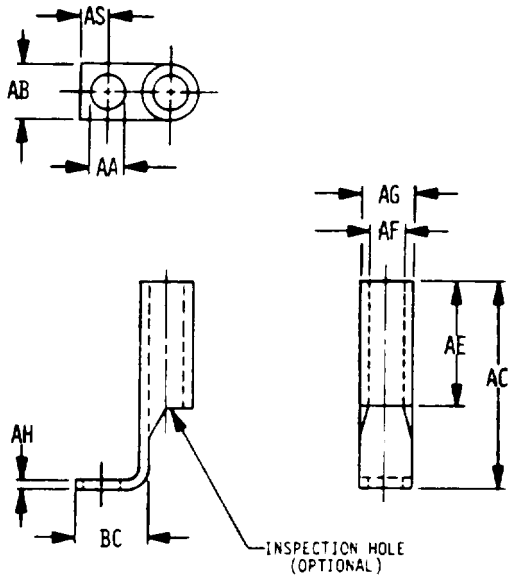


029-03-10



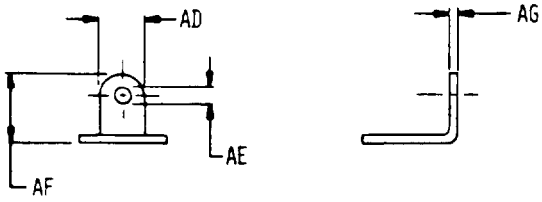


029-03-11




029-03-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

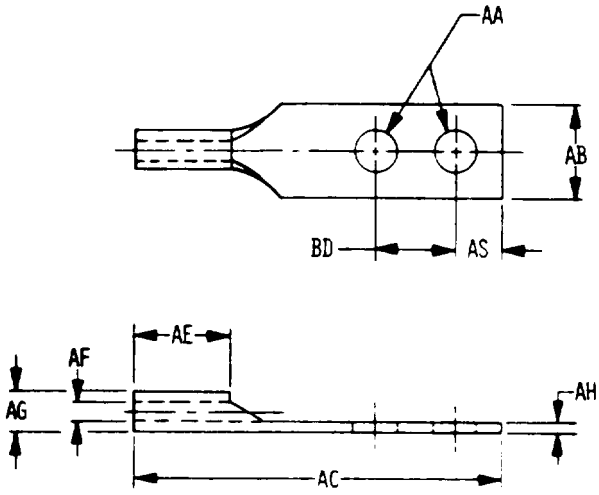


029-04-1

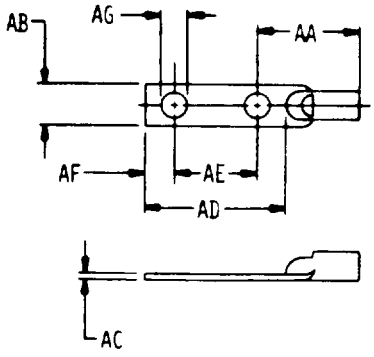


029-04-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

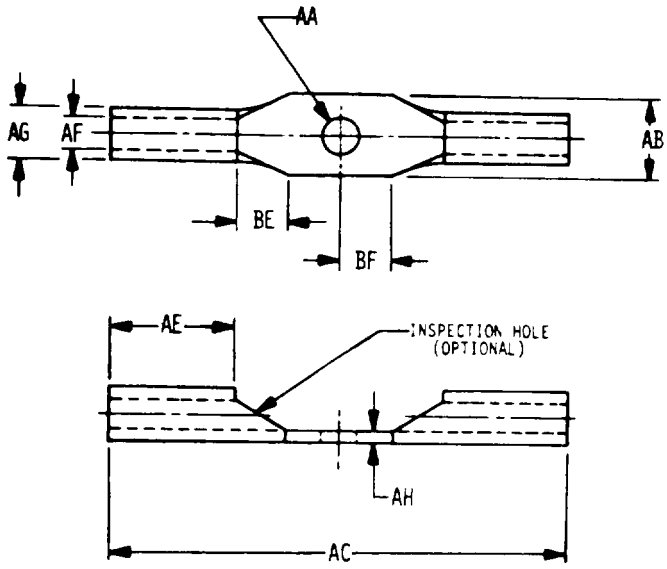

029-005-1

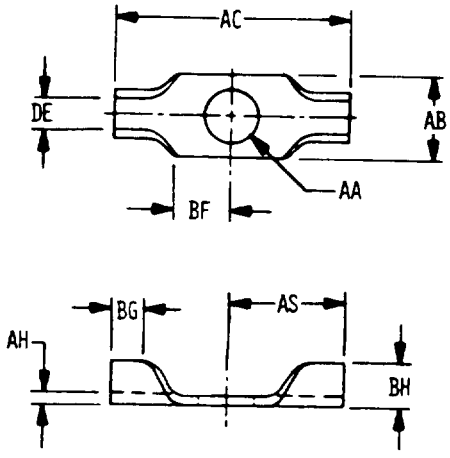


029-006-1

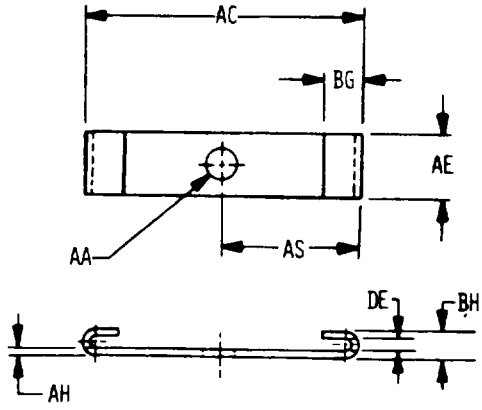


029-006-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

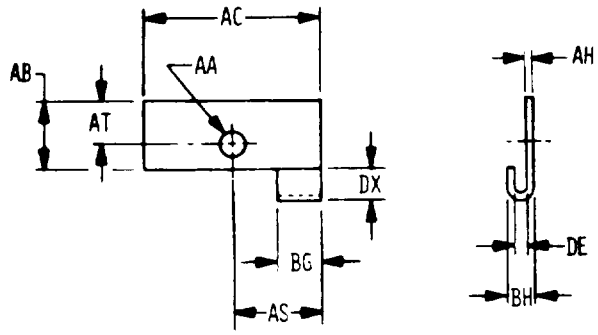


029-06-3

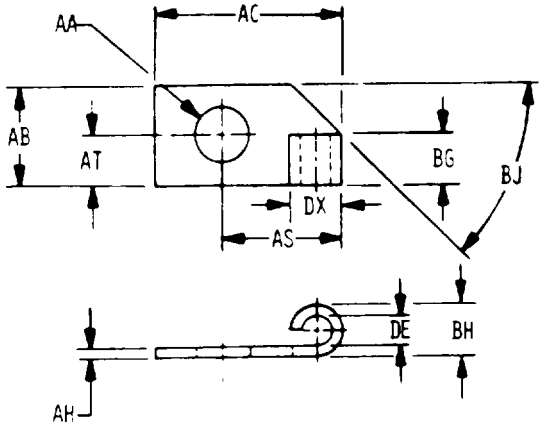


029-06-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

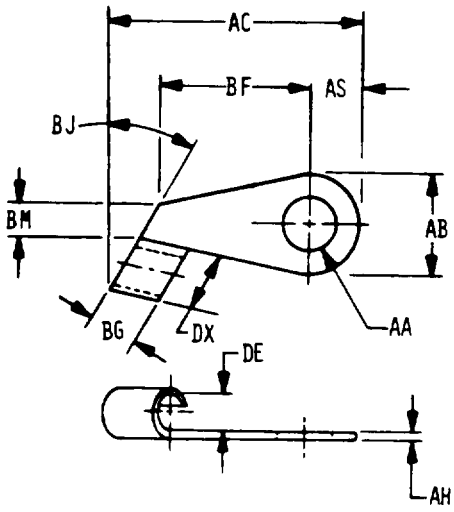

029-06-5

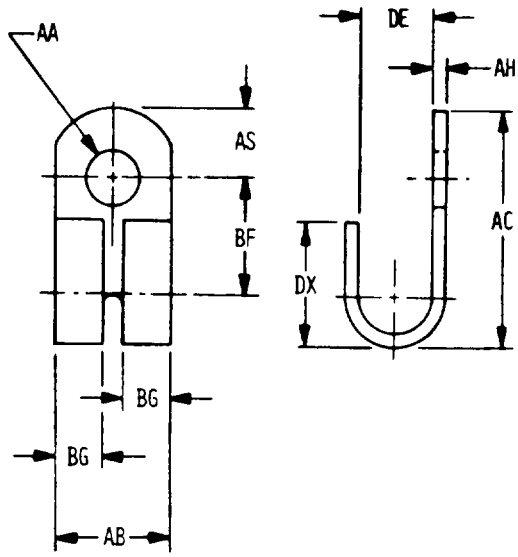


029-06-6

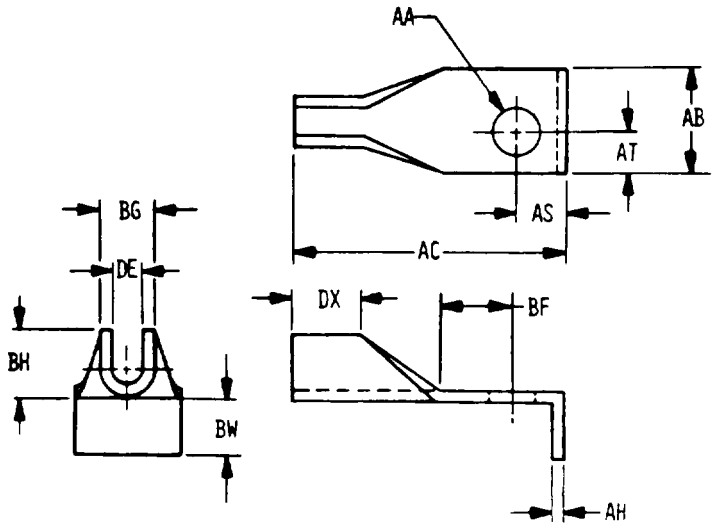


029-06-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

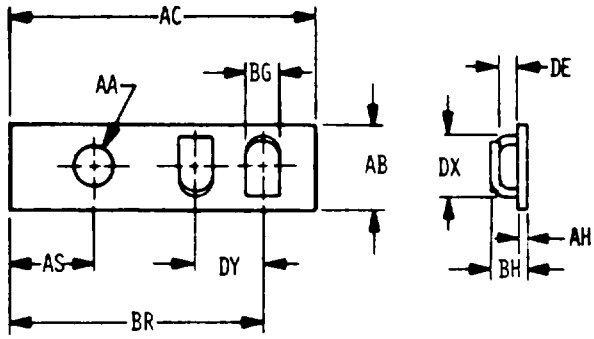


029-006-8

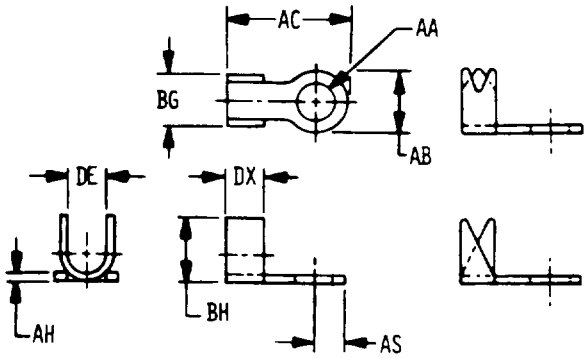


029-00E-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

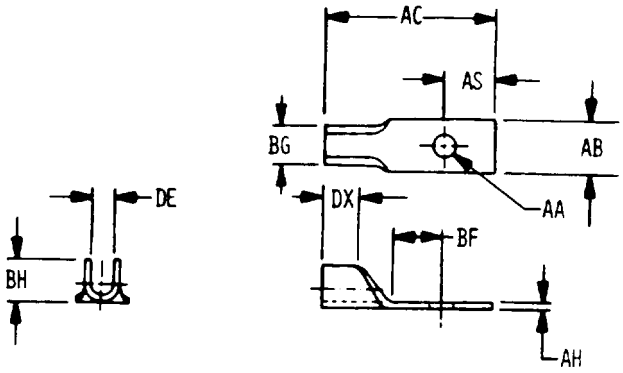


029-06-10

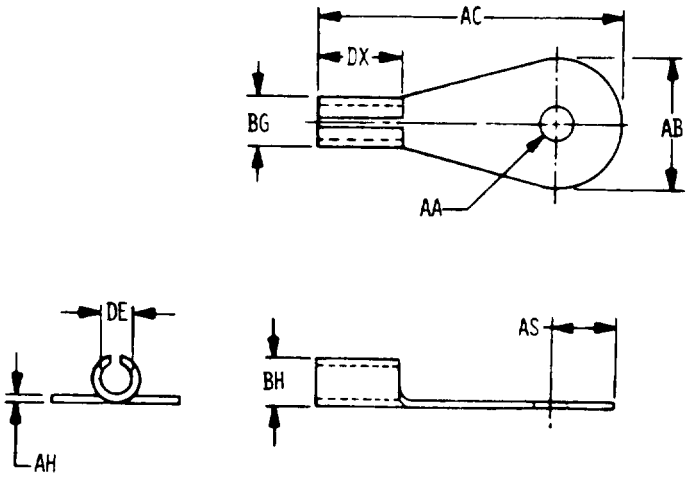


029-06-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

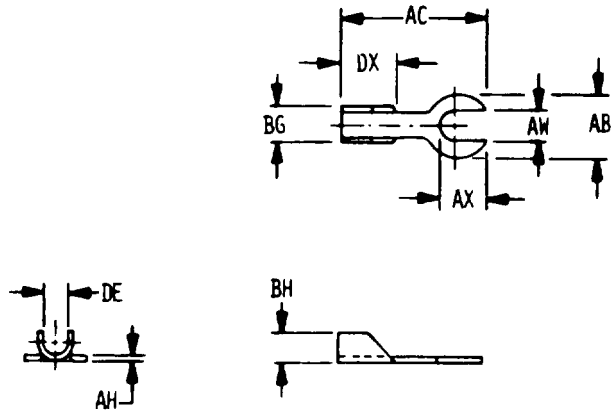


029-06-12

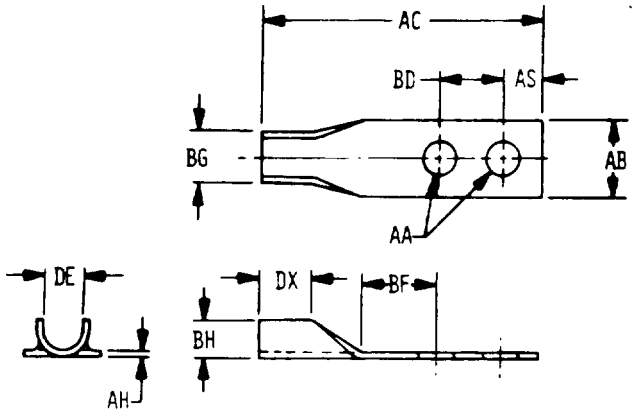


029-06-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

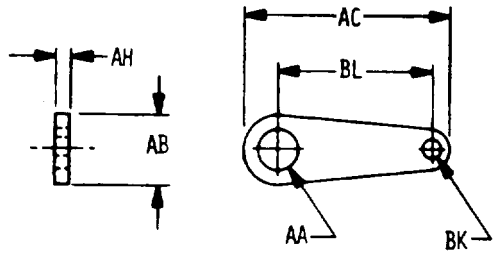


029-07-1

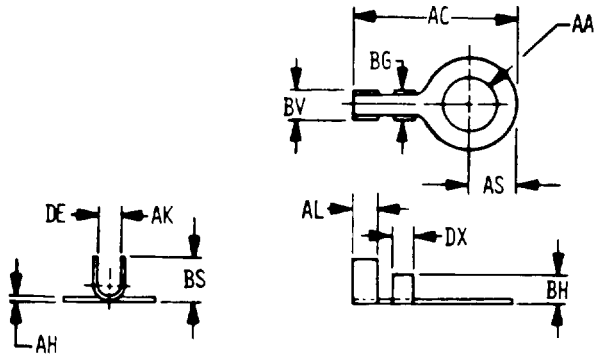


029-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

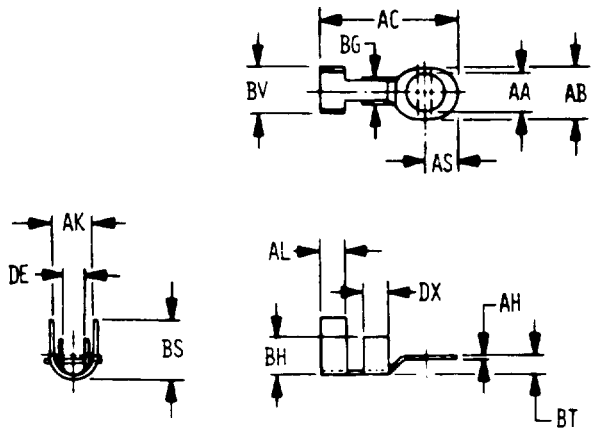


029-08-2

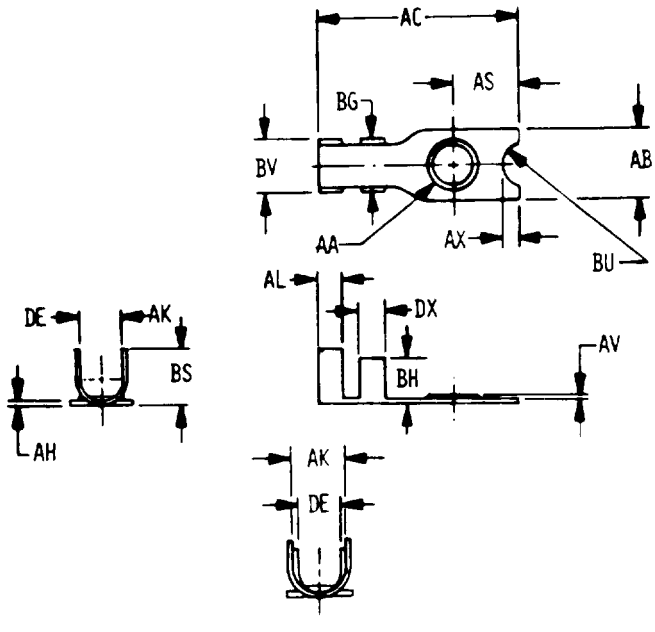


029-08-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

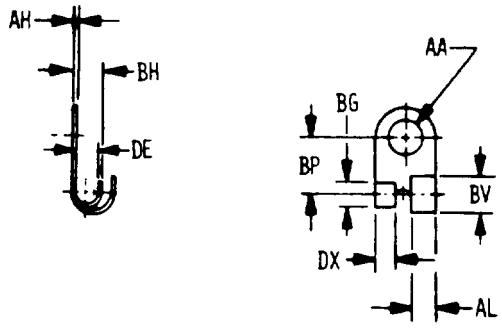


LEFT HAND

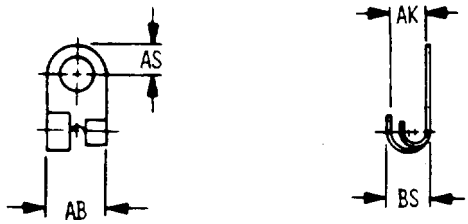


RIGHT HAND

Ø29-Ø8-4

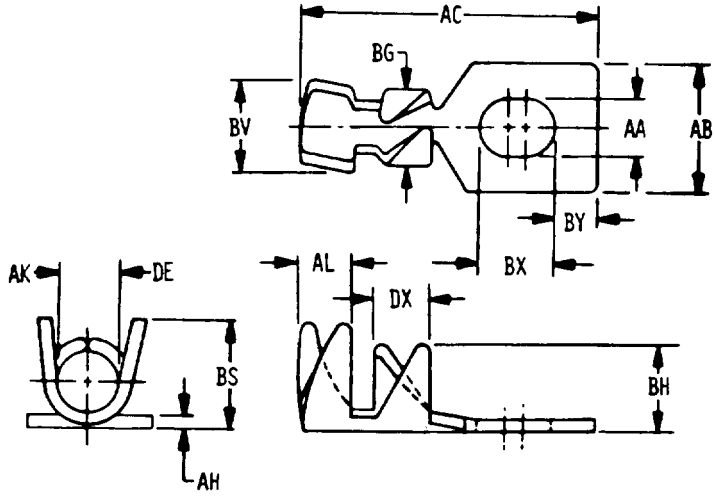


Ø29-Ø8-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

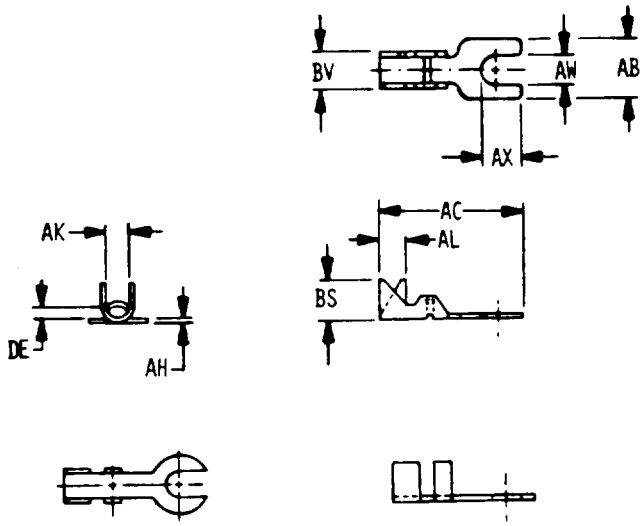


029-08-6

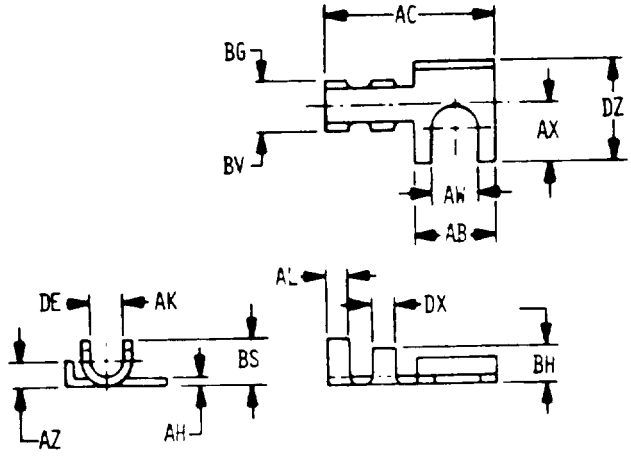


029-08-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

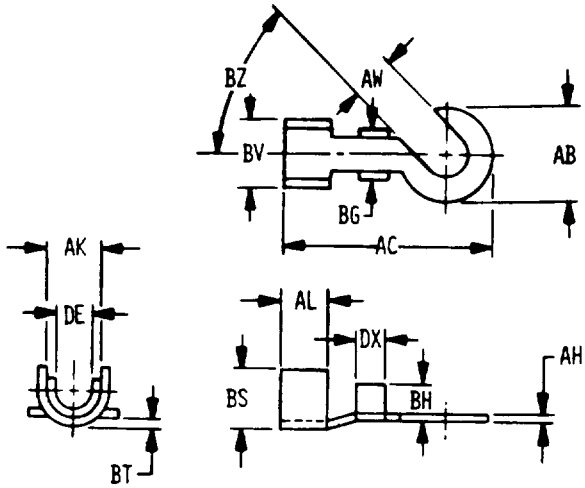


029-08-8

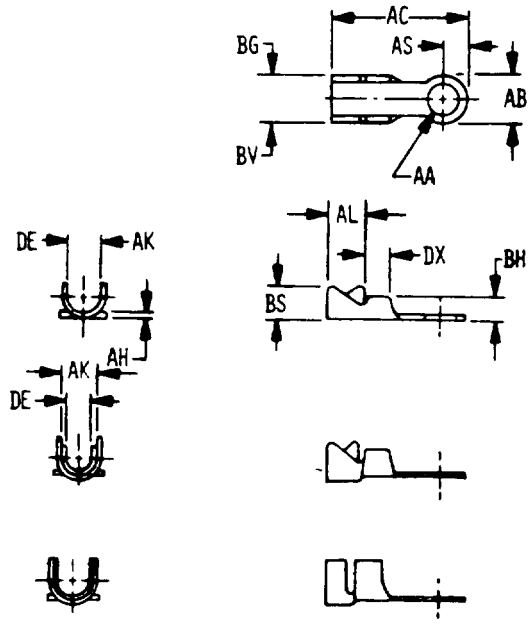


029-08-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

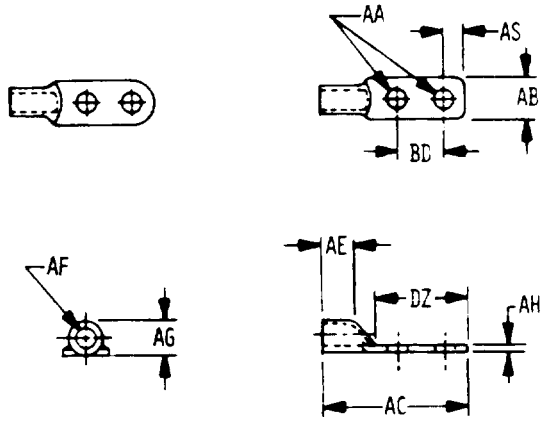


029-09-1

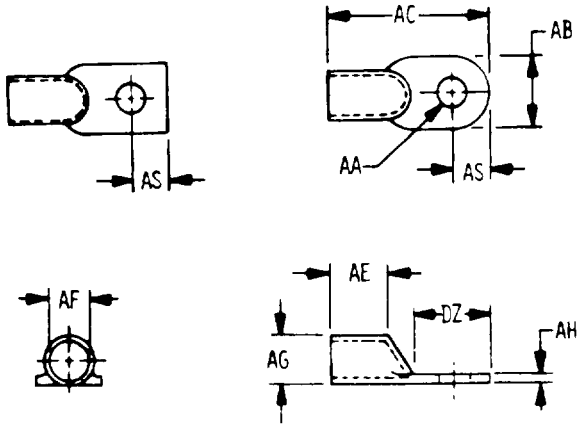


029-09-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

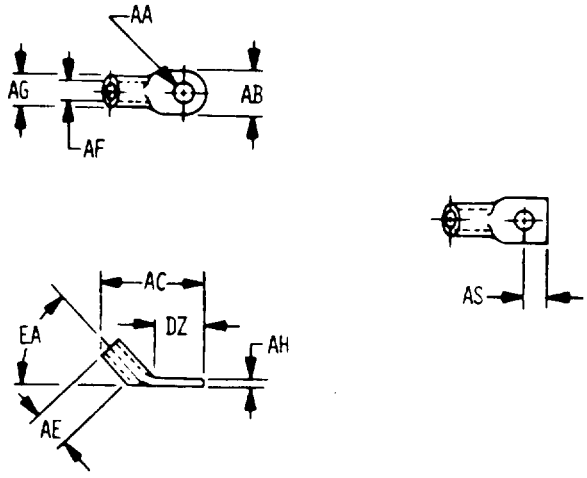


029-09-3

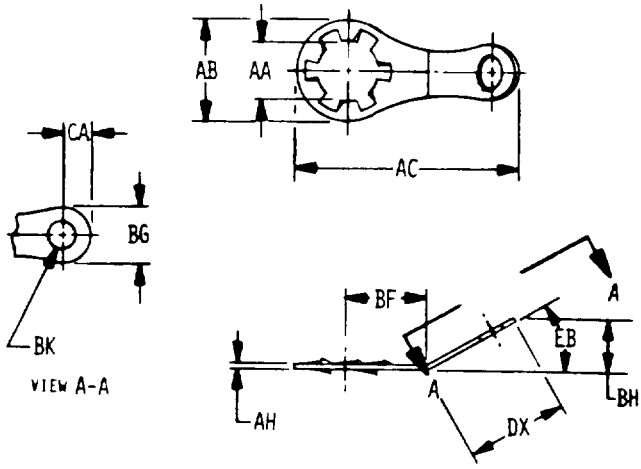


029-10-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

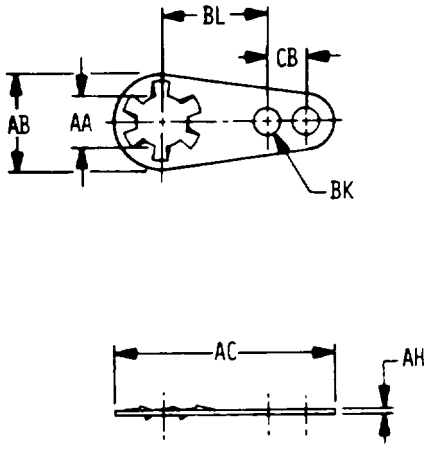

029-10-2

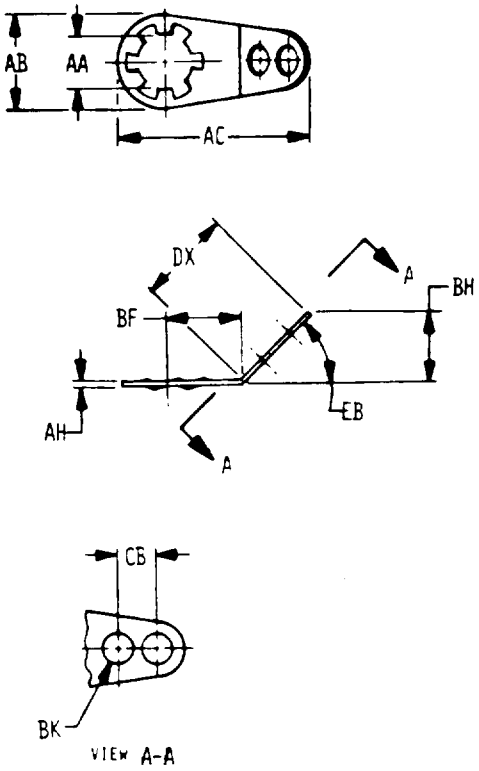


029-10-3

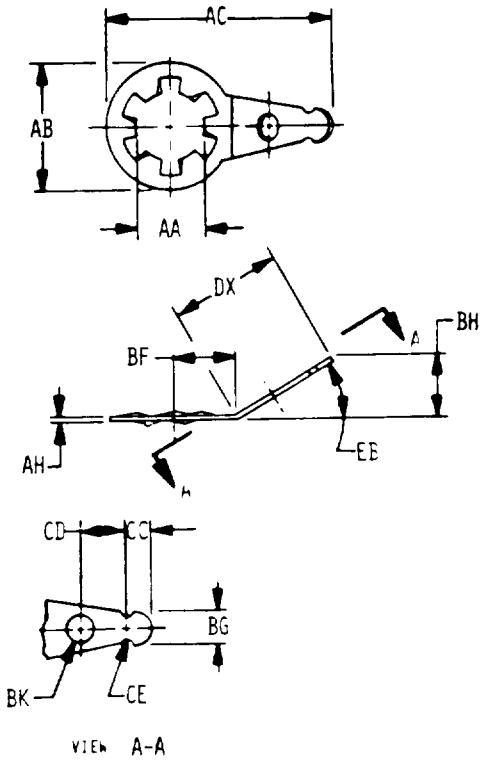


029-10-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

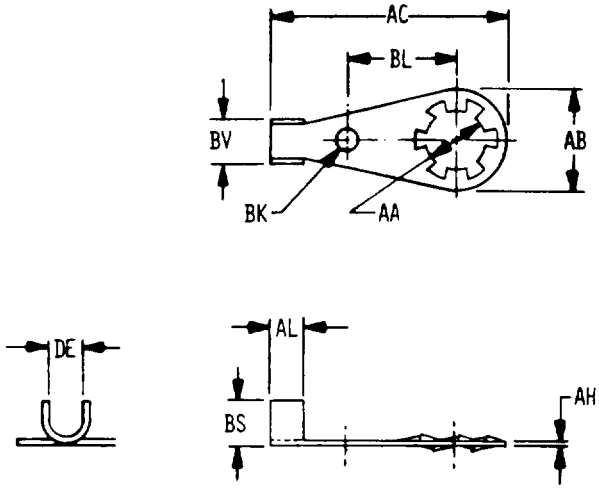


Ø29-11-1

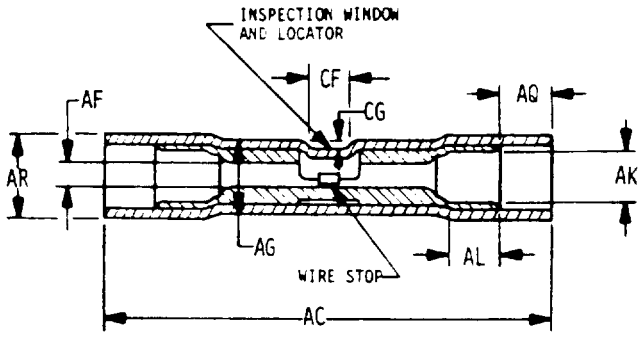



Ø29-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

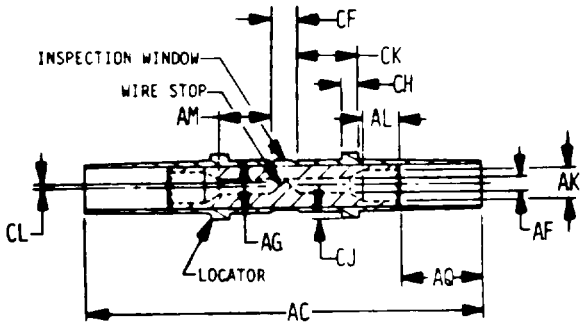


Ø29-12-2



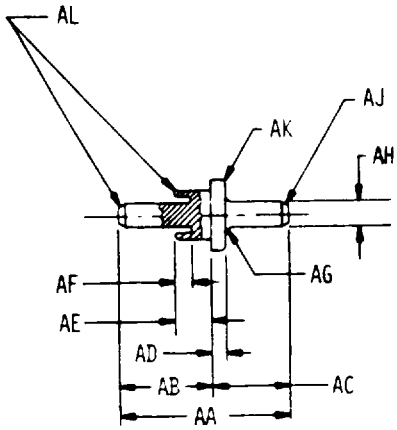


Ø29-12-3

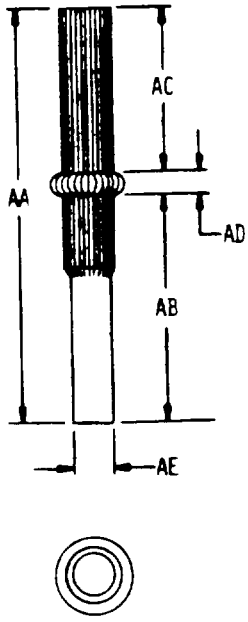


Ø29-12-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

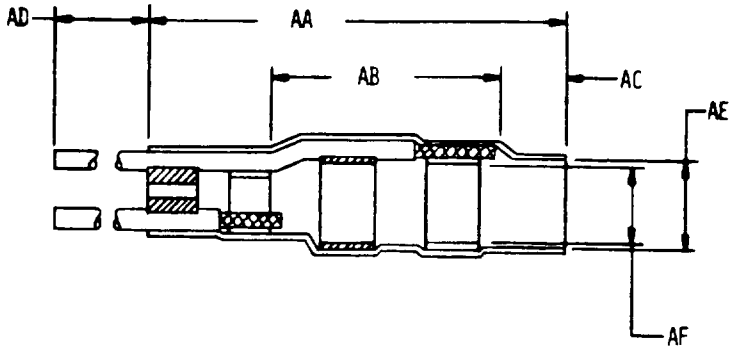

Ø29-12-5

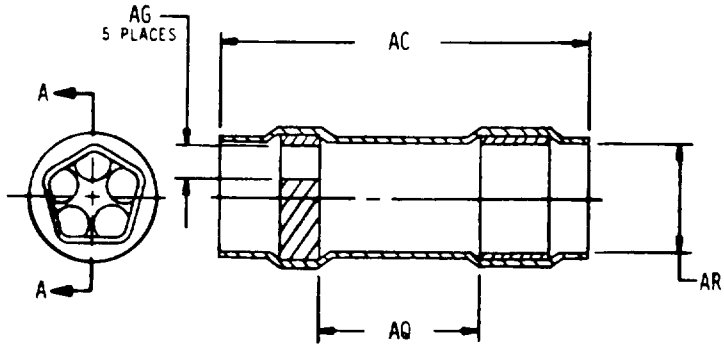


SECTION A-A

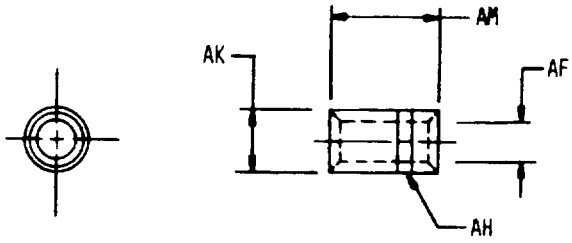


Ø29-12-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

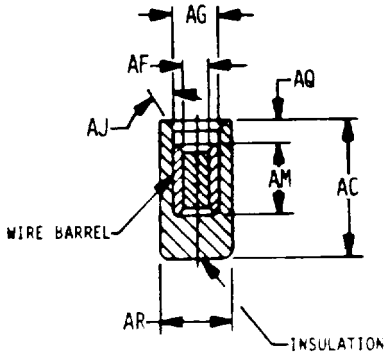


029-13-1

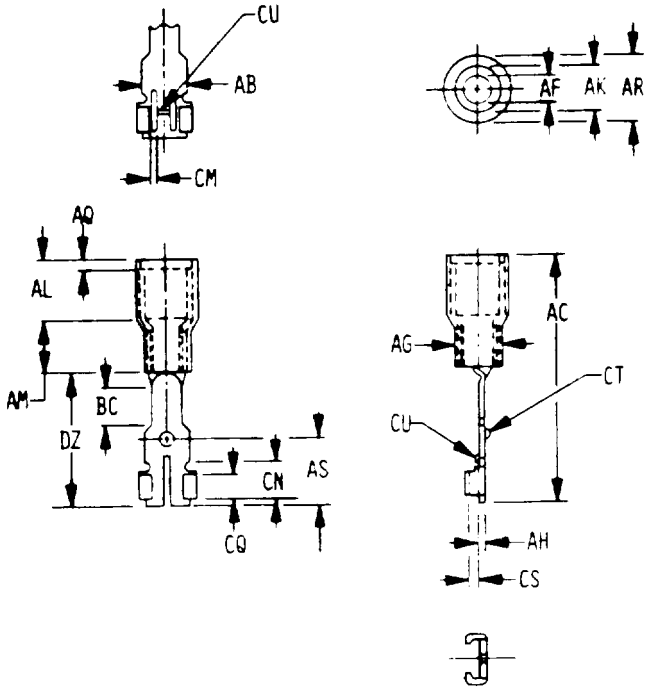


029-14-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

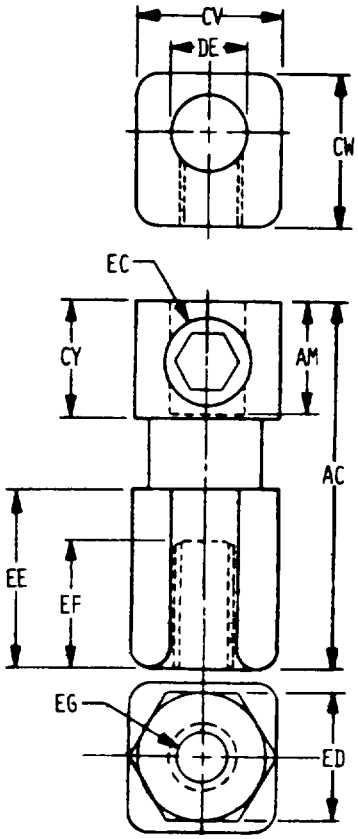


029-15-1

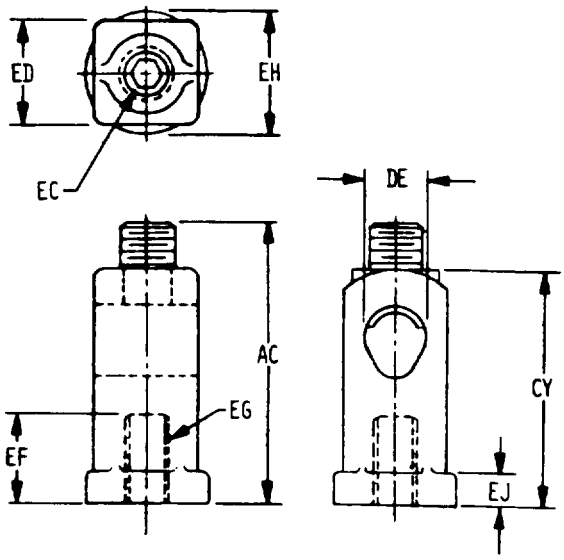


029-15-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

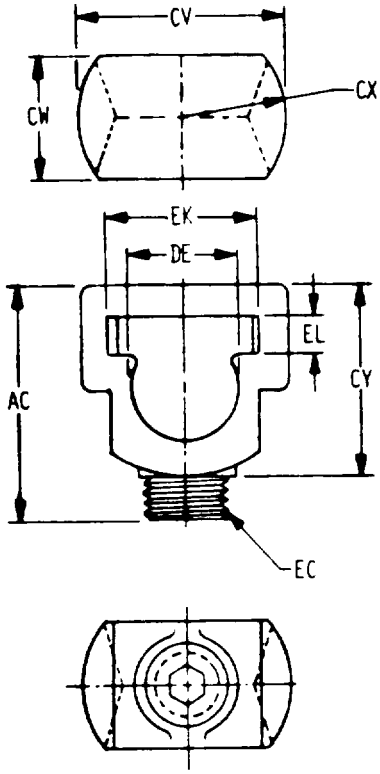

029-15-3

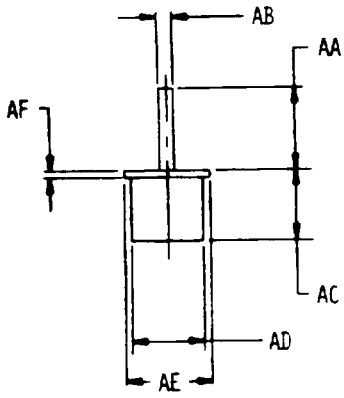


029-15-4

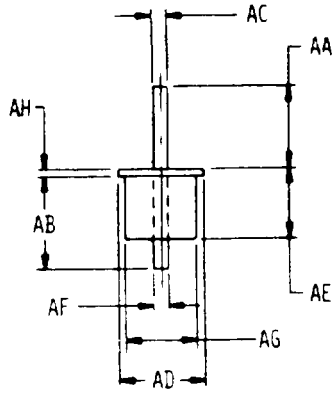


029-15-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

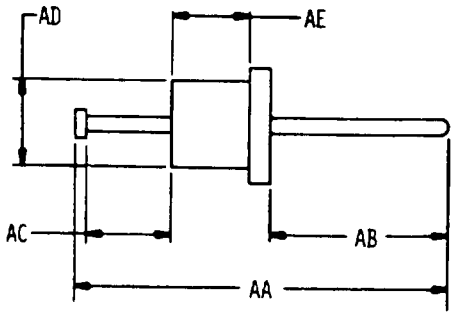

029-15-6

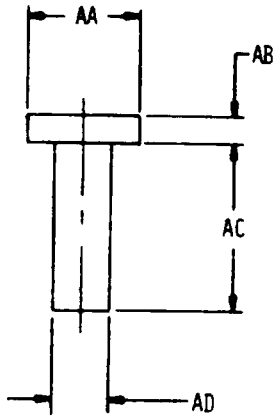


029-15-7

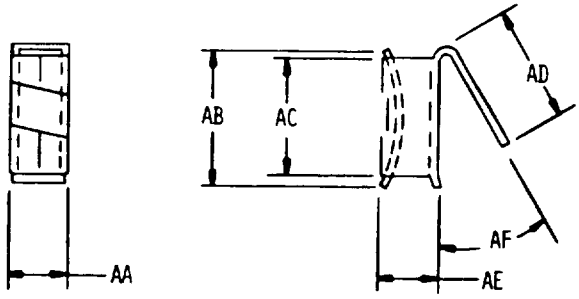


029-15-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

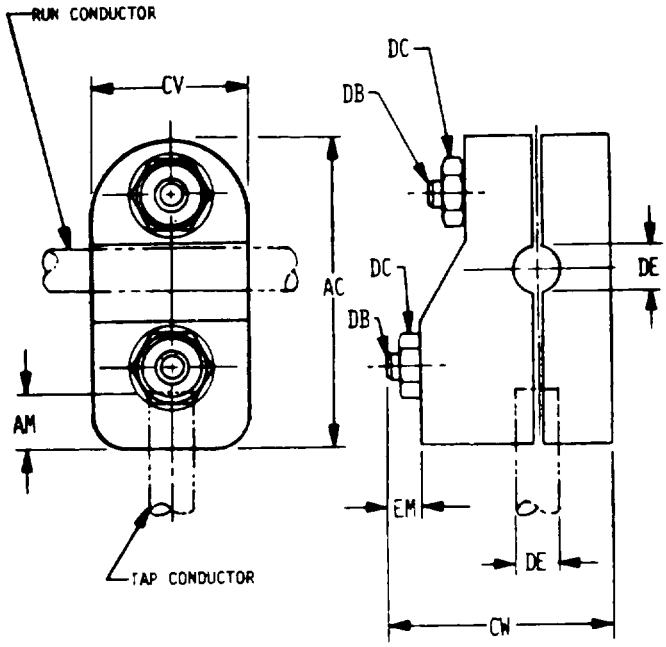

029-16-1

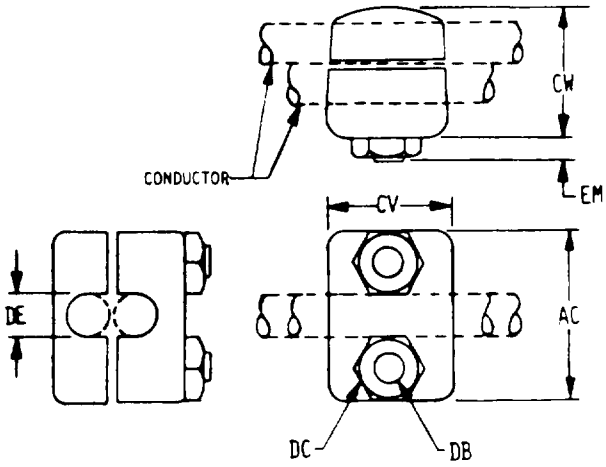


029-16-2

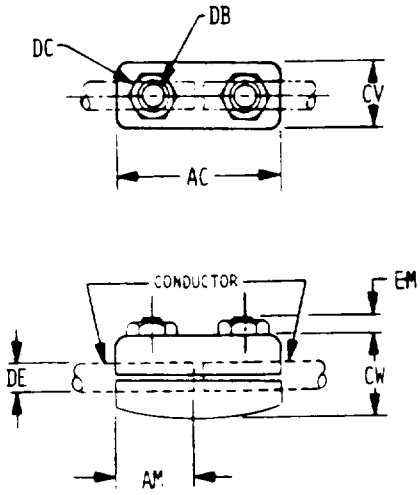


029-16-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

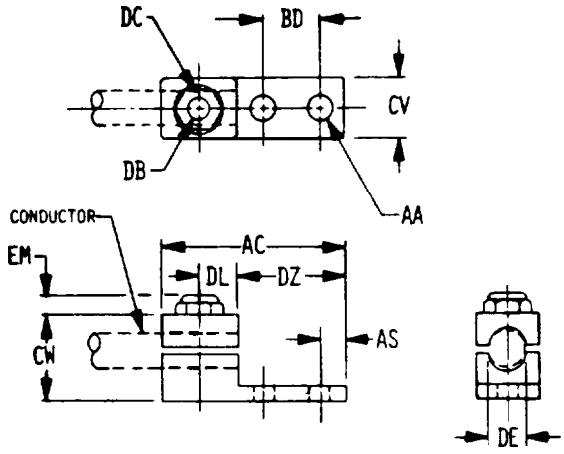


029-17-1

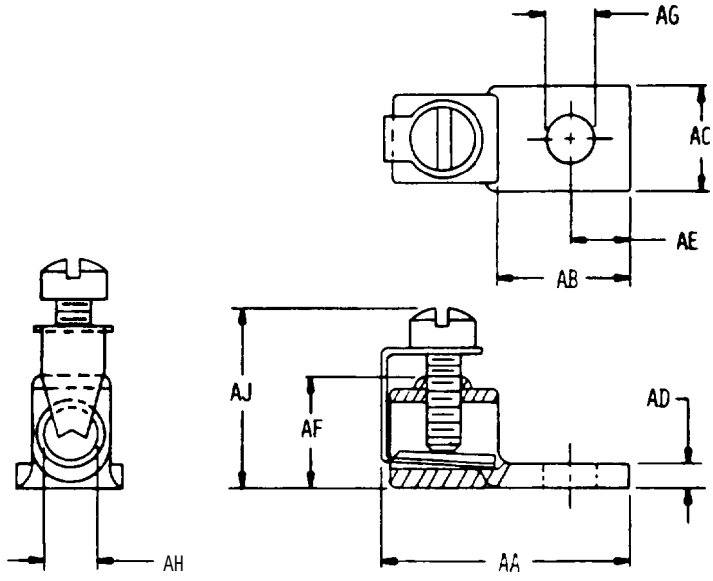


029-17-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

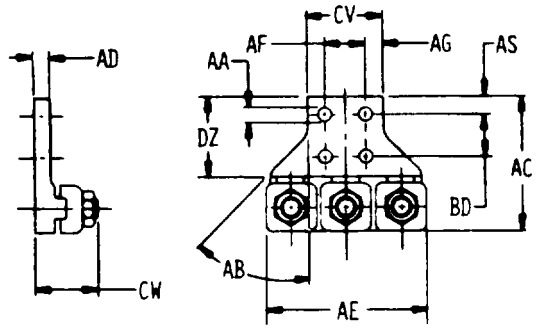


029-17-3

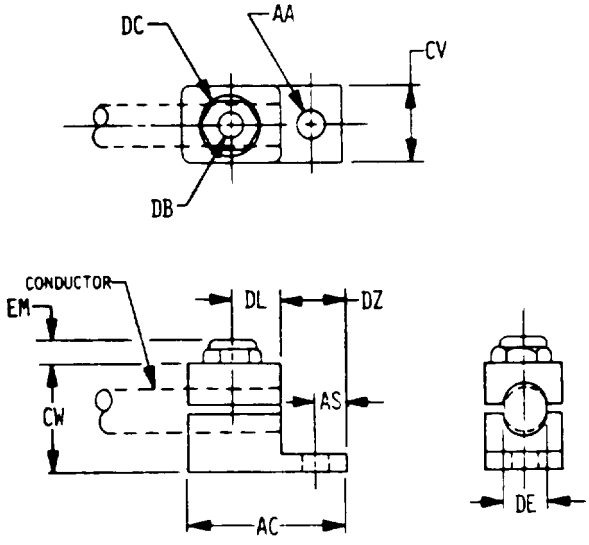


029-18-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

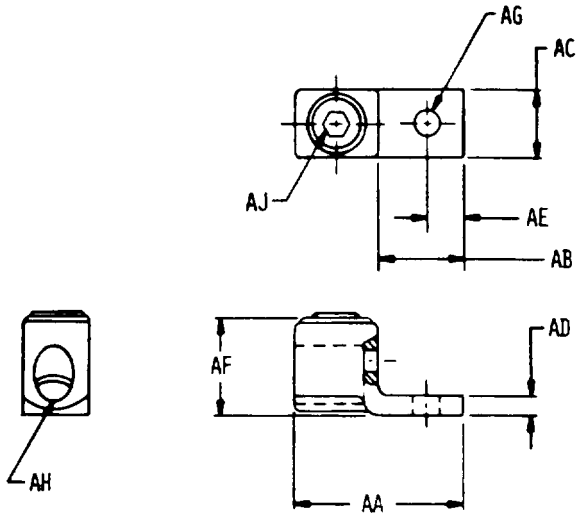


Ø29-18-2

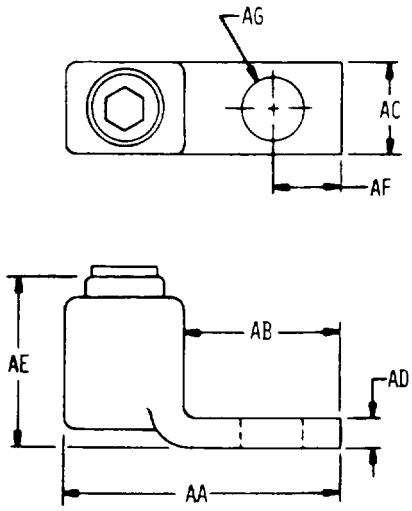


Ø29-18-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

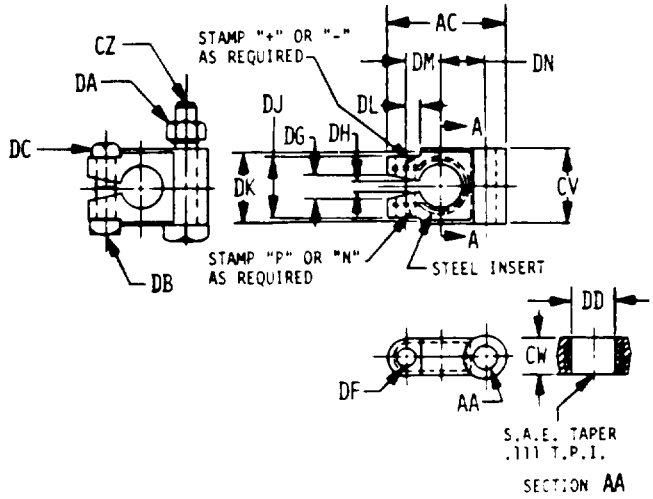

029-19-1

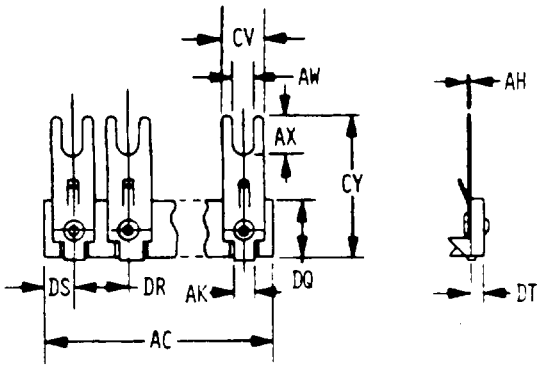


029-20-1

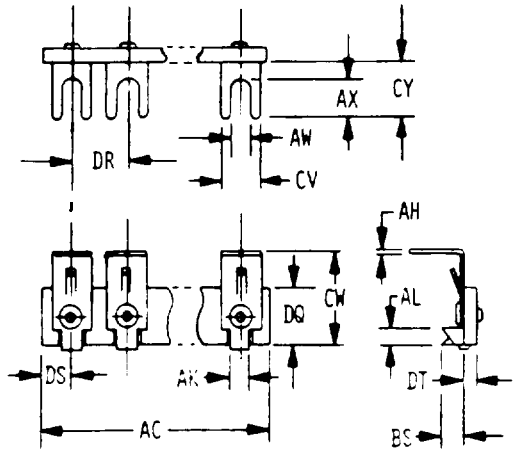


029-20-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

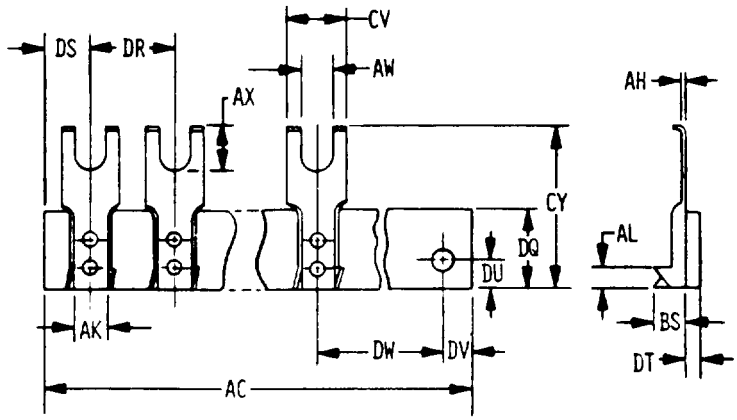


029-20-3

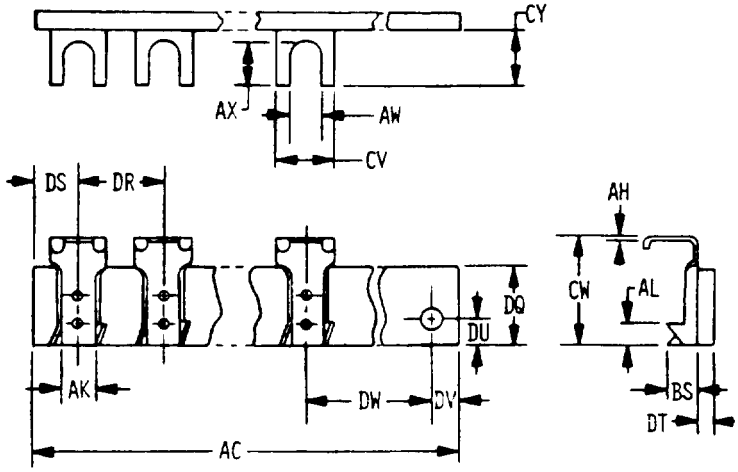


029-20-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

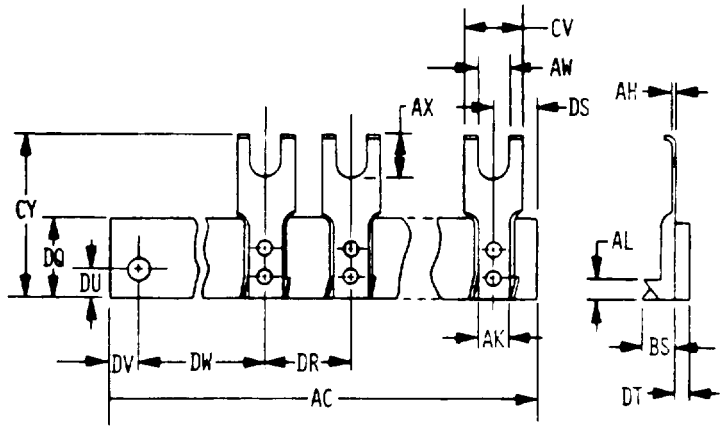


029-20-5

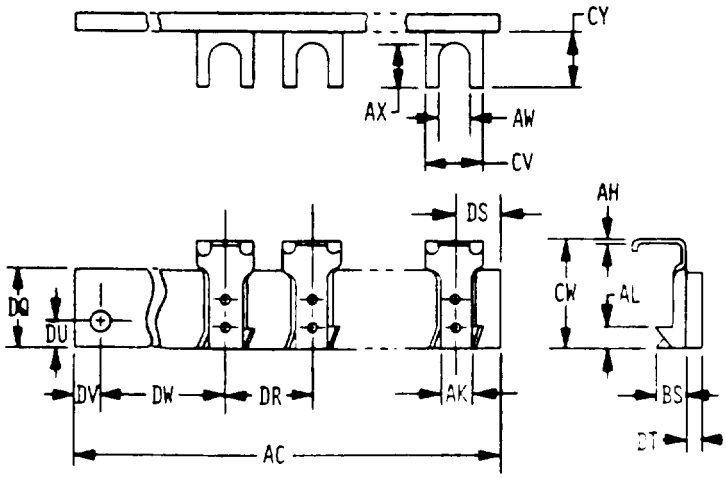


029-20-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

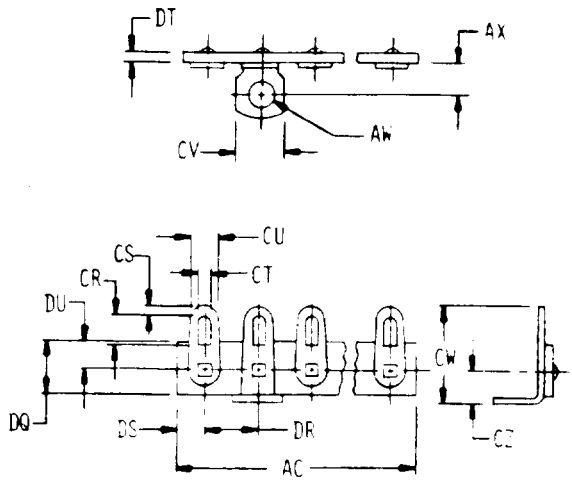

Ø29-20-7

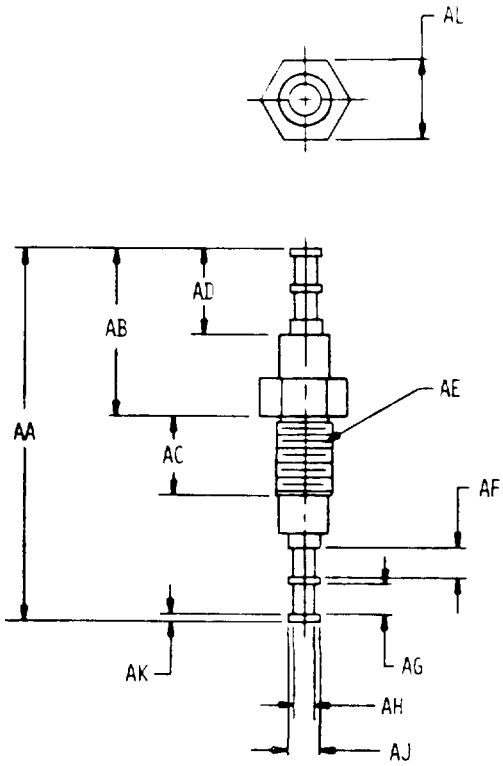


Ø29-21-1

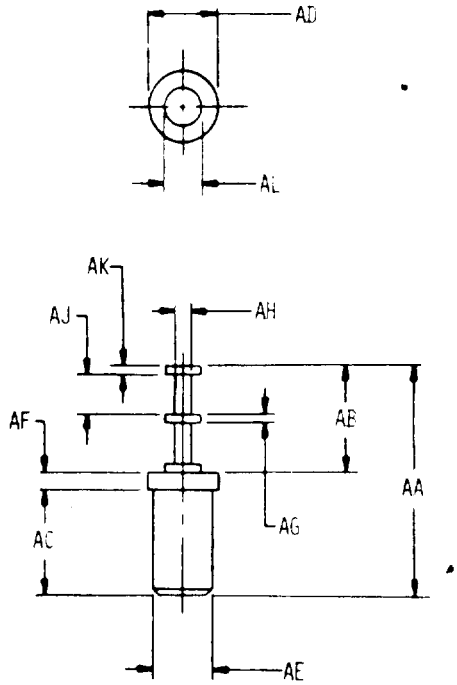


Ø29-21-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

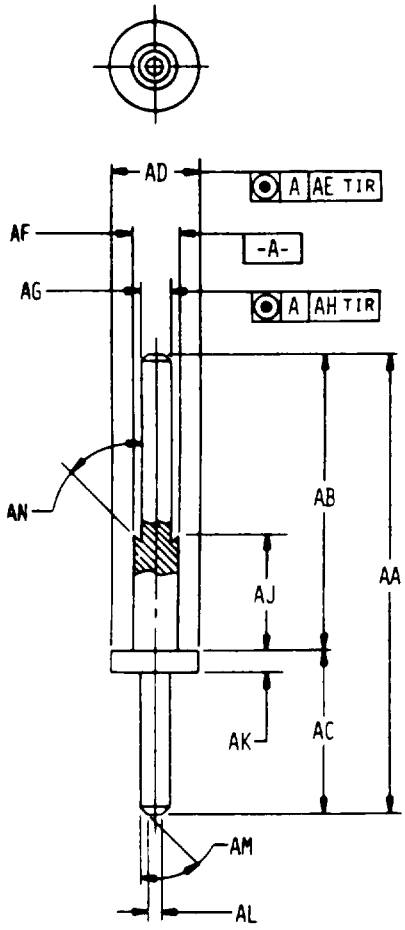

029-21-3

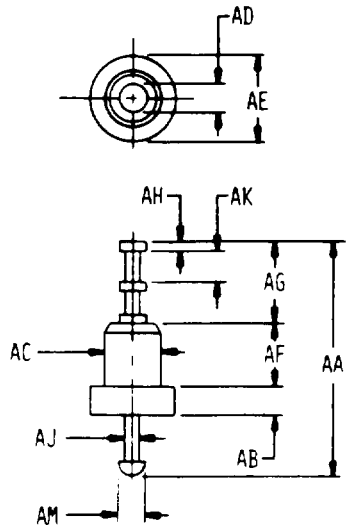


029-21-4

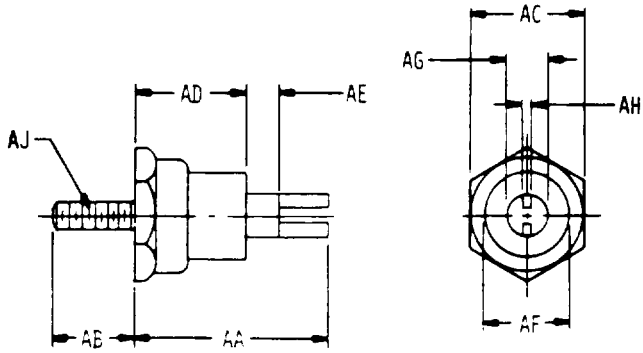


029-21-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

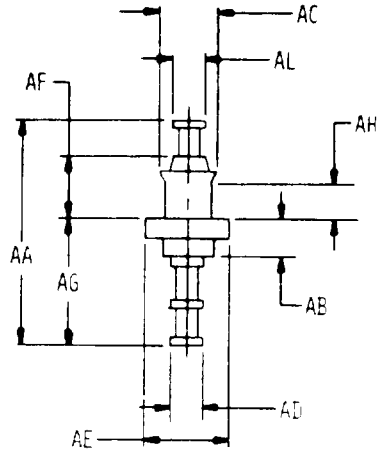

Ø29-21-6

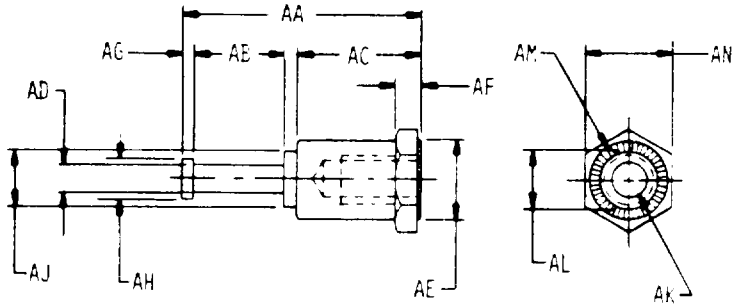


Ø29-21-7

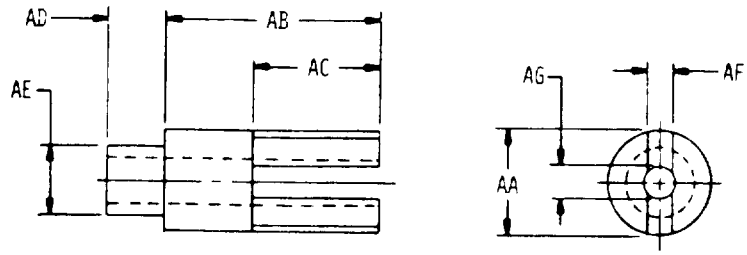


Ø29-21-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

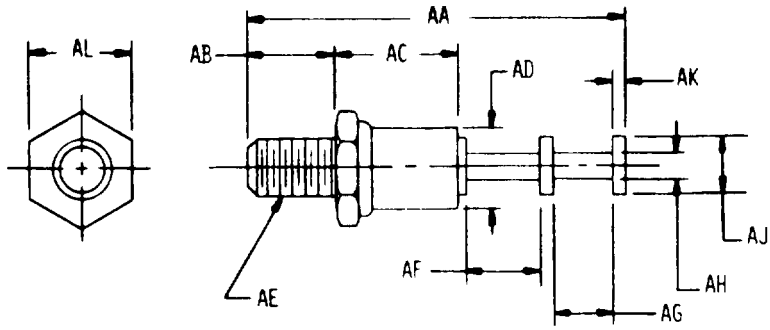

Ø29-21-9

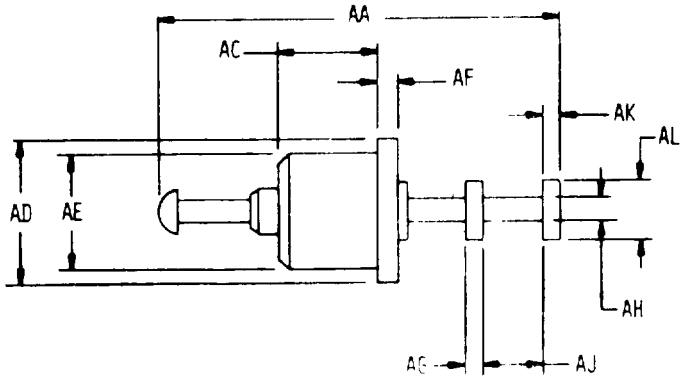

Ø29-21-1Ø

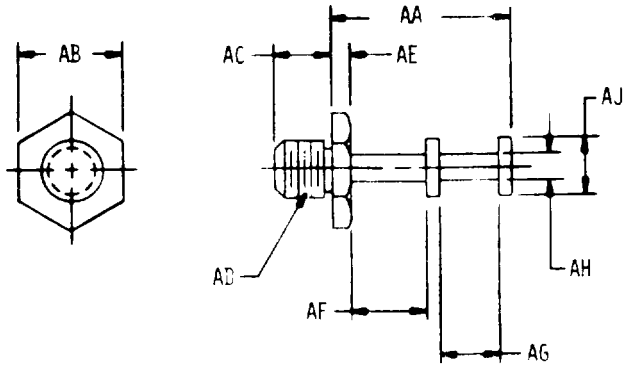

Ø29-21-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	20	1418	90	1490	100	1646	32
0102	20	1419	92	1494	82	1648	32
0103	20	1420	92	1495	82	1650	32
0104	20	1421	94	1497	68	1702	106
0105	20	1426	104	1500	86	1703	106
0107	22	1427	104	1502	86	1711	106
0108	22	1428	104	1504	86	1714	106
0700	20	1430	104	1508	84	1718	106
0800	20	1431	104	1509	84	1719	106
1003	20	1432	74	1511	66	1722	42
1004	20	1435	102	1523	68	1723	42
1005	20	1436	102	1533	98	1727	106
1006	20	1438	104	1534	98	1729	106
1008	20	1439	104	1535	102	1730	42
1009	26	1443	92	1536	102	1731	106
1371	66	1446	98	1537	102	1732	44
1373	66	1447	98	1562	28	1734	42
1374	102	1448	98	1563	24	1735	42
1375	92	1449	76	1564	28	1736	44
1376	66	1451	82	1566	30	1741	42
1377	68	1452	104	1568	30	1742	42
1378	66	1453	104	1570	30	1743	42
1380	66	1455	96	1572	30	1744	42
1384	66	1456	96	1573	30	1747	42
1386	66	1459	104	1574	30	1770	44
1387	66	1462	104	1575	30	1771	44
1391	74	1464	82	1580	30	1772	44
1394	72	1466	100	1581	32	1773	44
1395	74	1467	100	1600	24	1774	44
1396	72	1468	84	1602	24	1775	44
1397	74	1470	100	1604	24	1777	44
1400	72	1471	86	1606	24	1779	46
1406	74	1473	96	1608	24	1780	44
1407	66	1475	100	1610	24	1781	44
1410	92	1476	100	1612	24	1782	44
1411	92	1477	60	1614	24	1785	44
1412	92	1478	84	1638	32	1788	40
1413	92	1482	84	1640	32	1790	42
1414	92	1486	84	1642	30	1794	40
1416	94	1488	84	1644	30	1796	40

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1802	70	1871	38	1928	36	2030	58
1804	70	1872	40	1929	36	2033	62
1806	72	1873	38	1934	34	2034	62
1808	72	1874	40	1935	34	2041	58
1810	72	1875	38	1936	34	2072	52
1812	72	1876	40	1937	34	2073	52
1815	70	1877	38	1939	34	2074	52
1816	70	1878	38	1944	58	2076	52
1817	70	1879	38	1945	58	2080	52
1819	72	1881	38	1949	94	2081	52
1820	70	1882	96	1954	56	2083	52
1821	72	1883	40	1955	56	2085	52
1822	70	1885	96	1956	56	2092	108
1823	74	1886	96	1957	56	2093	108
1825	74	1887	96	1958	58	2096	108
1826	76	1889	96	1959	56	2097	108
1827	86	1890	96	1961	38	2098	108
1828	80	1892	96	1962	68	2100	108
1829	80	1893	96	1963	68	2104	108
1830	80	1894	46	1966	68	2106	108
1831	82	1895	98	1967	70	2902	54
1832	84	1897	100	1969	68	2903	54
1833	84	1902	90	1972	70	2904	54
1835	86	1905	90	1973	70	2906	54
1838	86	1906	90	1975	70	2908	54
1839	86	1907	90	1982	68	2912	54
1844	72	1908	90	1983	68	2913	54
1852	36	1909	100	1984	68	2914	54
1853	36	1911	100	1987	68	2915	54
1854	50	1912	90	2006	58	2916	54
1855	38	1914	90	2007	58	4662	88
1857	38	1915	102	2008	60	4663	88
1858	36	1916	90	2010	60	4664	88
1859	38	1917	102	2013	60	4665	88
1860	36	1918	90	2016	60	4666	88
1862	50	1919	102	2018	60	4667	88
1863	38	1922	36	2021	60	4669	76
1864	40	1924	36	2026	58	4671	78
1866	40	1926	36	2027	58	4672	88
1868	40	1927	36	2029	58	4674	88

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	110
Additional Requirements	110
Altitude	28
Aperture Cards Required	22
Applicable Documents	112
Axial Load	34
Base Document	20
Bending	36
Blocking	38
City, State, Zip	20
Classification	24
Company Name/Command	20
Compression	40
Conductivity	40
Conductor Accommodation (Wire Facility)	28
Configuration	26
Contract number/Office Symbol	20
Control	20
CrimpingTool	30
Current Cycling/Rating	42
Current Overload	44
Current Rating	24
Date	20
Design and Construction	28
Dielectric Withstanding Voltage at Reduced Barometric Pressure	46
Dielectric Withstanding Voltage at Sea Level	48
Endurance (Engaging and Disengaging)	52
Finishes	28
Flammability (External Flame)	54
Format	20
Fungus	54
Government Design Activity	20
Hardness	56
Heat Aging (Acclerated Aging)	58
Humidity	60
Immersion	64
Insulation Resistance	66

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Low Temperature Crimp - - -

INDEX (CONT)

Page

Units of Measure- - - -

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SRS CONTROL NO.	
*TITLE CODE (1 2 3 4 5 6)	*REQUESTER NO. (7 8 9 10 11 12)

	CHAR CODE
*REQUESTER'S NAME	Ø 1 Ø 1
*COMPANY NAME/COMMAND	Ø 1 Ø 2
*STREET/BUILDING	Ø 1 Ø 3
*CITY, STATE, ZIP	Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE	Ø 1 Ø 5
*REQUESTER FSCM	1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL	1 Ø Ø 5
*BASE DOCUMENT	1 Ø Ø 6
*SYSTEM APPLICATION	1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM	6 3 6 9
*FORMAT: SIX SECTION DOCUMENT.	Ø 7 Ø Ø
OR	
ONE SECTION DOCUMENT.	Ø 8 Ø Ø
REVISION OF AEDPS DOCUMENT NO.	Ø 1 Ø 8
*CONTROL: SOURCE.	6 8 7 3
OR	
SPECIFICATION.	6 8 7 4
UNIT OF MEASURE: U.S.	6 9 4 1
OR	
SI.	6 9 4 2
*SOURCE TABLE	9 A A B

CHARACTERISTIC VALUE

1 5 10 15 20 25 30 35 40 45 50 55 60

PLEASE SUPPLY THE FOLLOWING:
DASH-NUMBERED PART___REV___NOTICE#___

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (CHARACTERS Ø, S, I, Z CORRECTLY WRITTEN)

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.