MIL-A-82516(OS)
17 November 1967
Superseding
NOTS XS 463 Rev. G
7 September 1967

MILITARY SPECIFICATION
FOR
ACCELEROMETER

This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy

1. SCOPE

1.1 This specification establishes the requirements of one type of Accelerometer. (See 6.1 for intended use and description.)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein, except as noted.

SPECIFICATION

FEDERAL

PPP-B-621	Boxes, Wood, Nailed and Lock Corner

MILITARY

MIL-P-116	Preservation, Methods of
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-L-10547	Liners, Case, and Sheet, Overwrap: Water-Vaporproof or Waterproof, Flexible

FSC-1135

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-102	Preservation, Packaging and Packing Levels

MILITARY

MIL-STD-105D	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-167	Mechanical Vibrations of Shipboard Equipment

DRAWINGS

BUREAU OF NAVAL WEAPONS

Dwg 1661391	Accelerometer
LD 541635	Tester, Acceptance, Accelerometer

PUBLICATIONS

BUREAU OF NAVAL WEAPONS

OD 13761	Operation and Maintenance of the Accelerometer Acceptance Tester

(Copies of specifications, standards, drawings, and publications requested by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the accelerometer shall be in accordance with the requirements specified herein and with BuWeps Dwg 1661391.

3.2 Preproduction samples. Unless otherwise specified in the contract or order, preproduction samples of the accelerometer shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 herein and is for the purpose of determining that, prior to starting production, the contractor's production methods are capable of yielding items that comply with the technical requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

3.3 Performance and product characteristics. The accelerometer shall meet the following performance and product characteristics.

3.3.1 Voltage ratio. The accelerometer shall sense acceleration and vary the ratio of the voltage between the terminals A and B, A and C in proportion to the acceleration along its sensitive axis, see Figure 1. The voltage ratio measured in a bridge circuit shall equal 0.02145 per g (g = unit of gravitational acceleration) for any acceleration between 3 and 20g.

3.3.2 Transverse acceleration effects. The change in voltage ratio specified in 3.3.1 shall be not greater than 0.005 when the accelerometer is subjected to an acceleration of 20g perpendicular to its sensitive axis.

3.3.3 Noise voltage. The accelerometer shall produce a noise voltage of not greater than 10 millivolts at terminal B, when a current of 0.100 milliamperes is induced at this terminal.

3.3.4 Circuit resistance. The accelerometer shall have a resistance of 8000 plus or minus 1000 ohms between terminals A and C.

3.3.5 Insulation resistance. The accelerometer shall have an insulation resistance of not less than 20 megohms when a potential of 500 plus or minus 50 volts DC is applied between terminal A and the case.

3.3.6 Natural frequency. The accelerometer shall have a natural frequency of 17 plus or minus 2 cycles per second (cps).

3.3.7 Temperature, operating condition. The accelerometer shall meet the voltage ratio requirement of 3.3.1 while at temperatures from 35 to 120 degrees F.

3.4 Environmental requirements. Unless otherwise specified, the accelerometer shall be capable of conforming to the performance and product characteristics of this specification after being exposed to the environments and all conditions specified herein.

3.4.1 Storage condition. The accelerometer shall withstand temperatures from minus 65 to plus 160 degrees Fahrenheit (F).

3.4.2 Humidity. The accelerometer shall withstand relative humidity up to 95 percent as specified in MIL-E-5272 Procedure I.

3.4.3 Shock, standby condition. The accelerometer shall withstand shocks of 40g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 5 milliseconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

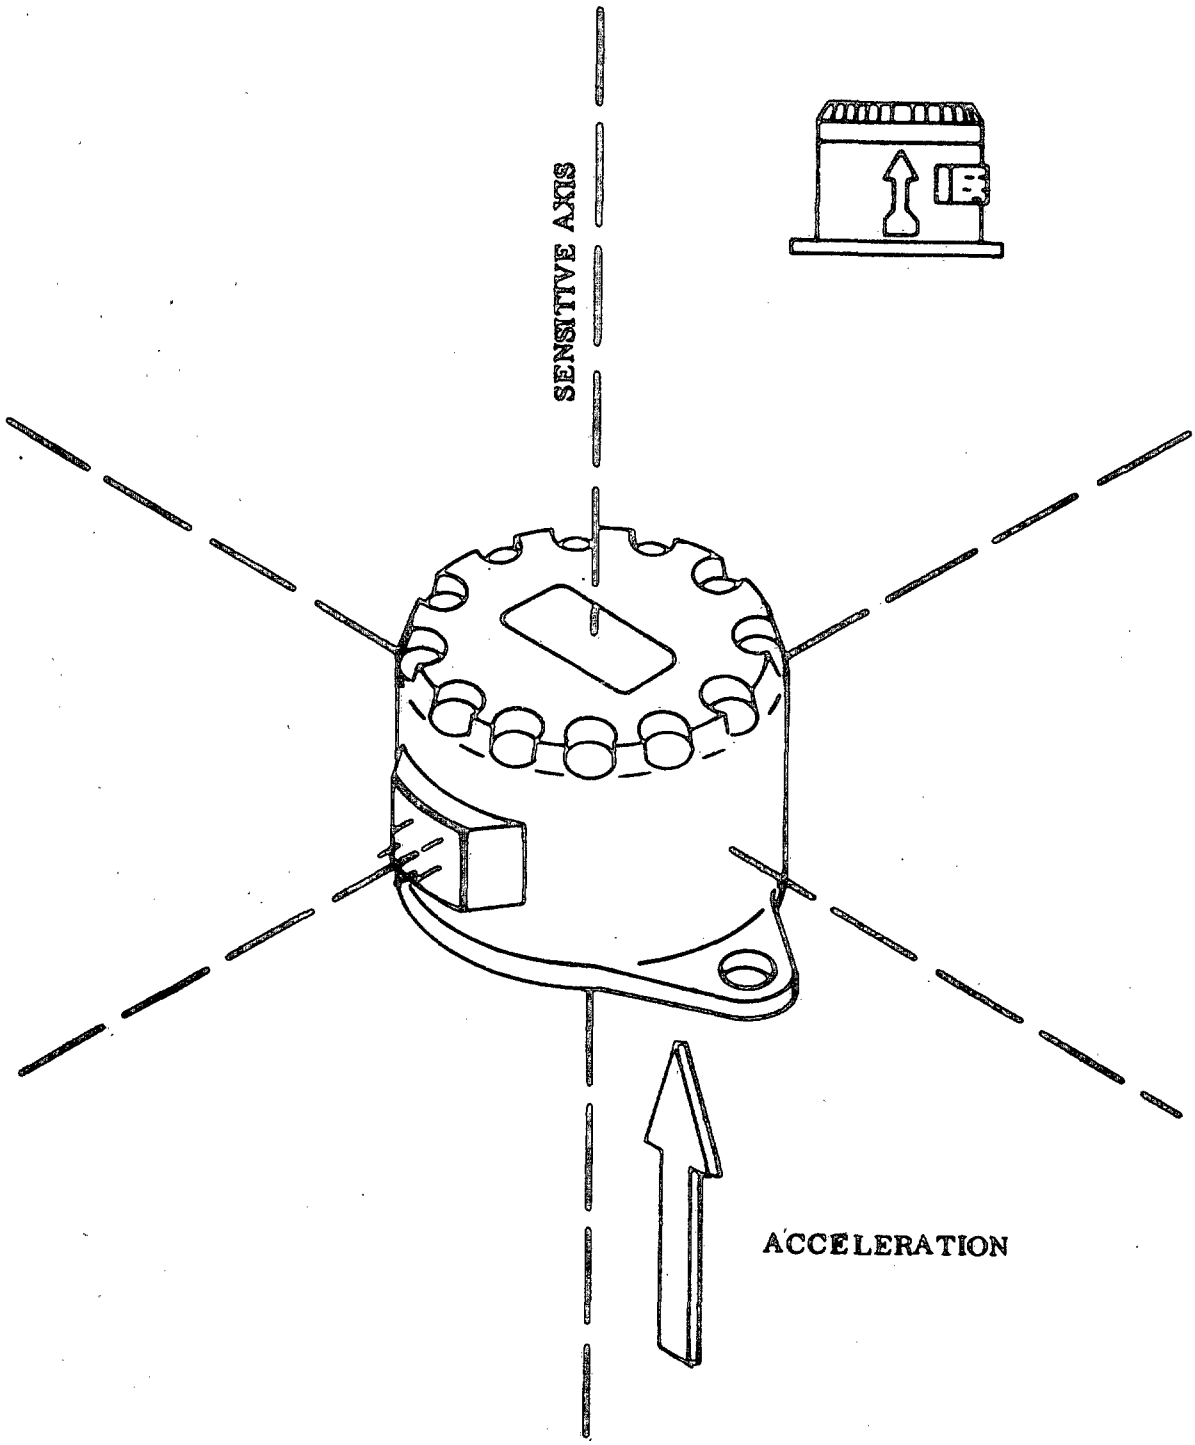


Figure 1. Environmental Testing Axes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

3.4.4 Vibration.

3.4.4.1 Standby condition. The accelerometer shall withstand vibration as specified for Type I equipment in MIL-STD-167 up to 25 cps.

3.4.4.2 Operating condition. The accelerometer shall withstand vibration through a frequency range of 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less.

3.5 Workmanship. The workmanship and finish shall be of sufficiently high grade to assure satisfactory operation consistent with the requirements of this specification. All parts used in the assembly shall be thoroughly clean and free of excess materials, chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the accelerometer shall be classified as follows:

a. Preproduction and periodic production inspection. (See 4.5.)

b. Quality conformance inspection. (See 4.6.)

4.3 Sampling. (See 6.2.1.)

4.3.1 Lot size. The term "lot" shall mean "inspection lot", that is a collection of product submitted by a supplier for inspection. Unless otherwise specified in the contract or order the number of product in each lot shall be three hundred (300).

4.3.2 Preproduction sample. A preproduction sample of ten (10) accelerometers, manufactured in accordance with 3.2 shall be subjected to the preproduction tests detailed in 4.5. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the accelerometers by the supplier, prior to approval of the preproduction sample, shall be at the supplier's risk.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.3.3 Periodic production sample. From each succeeding lot of three hundred (300) or less, a random sample of ten (10) accelerometers shall be selected. These sample units shall be subjected to the tests of 4.5. The accelerometers shall be considered satisfactory if they meet all specification and pertinent drawing requirements and withstand the tests specified in 4.5. (See Table I.) When a defective unit is found in any lot, acceptance of all units in the lot shall be withheld and the contractor shall:

a. Determine the cause of the defect.

b. Take the necessary action, with the concurrence of the procuring activity, to correct or eliminate the defect from all units in the lot and, if so directed by the procuring activity, from those units previously shipped.

c. Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect.

Table I. Preproduction and Periodic Production Test Sequence

Test	Paragraph Number	Test Quantities Preproduction	Periodic
Quality Conformance Inspection	4.6	10	10
Verification Tests	4.5.1.1	10	10
Temperature, Storage Condition	4.5.1.2	10	10
Humidity	4.5.1.3	10	-
Quality Conformance Inspection	4.6	10	10
Shock, Standby Condition	4.5.1.4	10	10
Vibration, Standby Condition	4.5.1.5	10	10
Quality Conformance Inspection	4.6	10	10
Vibration, Operating Condition	4.5.1.6	10	10
Verification Tests	4.5.1.1	10	10
Quality Conformance Inspection	4.6	10	10

4.3.4 Quality conformance inspection sampling. Samples shall be selected as specified in 4.6 and shall be used to determine the acceptability of the accelerometer inspected as specified in 4.6.

4.4 Test equipment and test conditions.

4.4.1 Quality conformance inspection equipment. The following items of test equipment are required to perform the quality conformance inspection tests:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Equipment	Capability
a. Tester, Acceptance, Accelerometer	BuWeps LD 541635; operate in accordance with OD 13761
b. Centrifuge	0 to 20g; accuracy of plus or minus 0.25g from 3 to 20g; minimum of six slip rings
c. Power supply	10 volts DC, with an AC ripple not greater than 1 millivolt
d. Vacuum tube voltmeter	0 to 30 millivolts AC; accuracy plus or minus 5 percent
e. Milliammeter	0.0 to 0.3 milliampere DC; accuracy plus or minus 5 percent
f. Resistance measuring device	0 to 10,000 ohms; full scale accuracy of 1.00 percent
g. Megohmmeter	0.5 to 50 megohms at 500 volts DC; full scale accuracy of 12 percent
h. Temperature chamber	Maintain temperature at: 35 plus 5 minus 0 degrees F 120 plus 0 minus 5 degrees F

4.4.2 Preproduction and periodic production test equipment. The following items of test equipment, in addition to selected items of quality conformance inspection equipment and pieces of equipment recommended by applicable specifications or standards referenced within test procedure paragraphs, are required to perform the preproduction and periodic production tests:

Equipment	Capability
a. Vibration testing machine	Control frequency from 14 cps to 2000 cps while subjecting test item to 0.10-inch double amplitude or 10g acceleration, whichever is less; maintain direction of vibration along specified axes.
b. Shock equipment	Apply shocks of 40 plus or minus 4g; a one-half sine wave pulse shape of 5 plus 3 minus 0 milliseconds duration; maintain direction along specified axes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Equipment	Capability
c. Temperature chamber	Maintain temperature at: Minus 65 plus 5 minus 0 degrees F Plus 160 plus 0 minus 5 degrees F
d. Oscilloscope	5-inch diameter tube, with rise time of less than 1 microsecond; accuracy 5 percent

4.4.3 Test conditions. Unless otherwise specified, the accelerometer shall be subjected to the preproduction and periodic production tests, verification tests, and quality conformance inspection tests under the following conditions:

a. Temperature	Room ambient (65 to 95 degrees F)
b. Altitude	Normal ground atmospheric pressure
c. Humidity (relative)	Room ambient up to 95 percent
d. Vibration	150 to 200 cps, 1.25 plus or minus 0.50g applied parallel to the sensitive axis during the following tests: transverse acceleration effects 4.5.1.1.2, voltage ratio 4.6.1.1, low temperature 4.6.1.5, and high temperature 4.6.1.6

4.5 Preproduction and periodic production inspections. The preproduction and periodic production samples after satisfactorily passing the quality conformance inspection detailed in 4.6 shall be subjected to the tests specified in 4.5.1.

4.5.1 Test procedure. Subject the accelerometer to the test sequence listed in Table I. Unless otherwise specified in the individual test paragraph, the quality conformance inspection and verification tests as specified in Table I, shall be performed subsequent to environmental tests under test conditions specified in 4.4.3. Failure of the accelerometer to pass any one of these tests shall constitute a defective unit.

4.5.1.1 Verification tests. The accelerometer shall be subjected to the extended range voltage ratio 4.5.1.1.1, transverse acceleration effects 4.5.1.1.2, and natural frequency 4.5.1.1.3 tests before and after exposure to the environments specified in 4.5.1.2 through 4.5.1.6 inclusive, and shall meet the requirements specified herein.

4.5.1.1.1 Extended range voltage ratio. The accelerometer shall be mounted and tested as in 4.6.1.1 at accelerations of 3 plus or minus 0.25g, 7 plus or minus 0.25g, and 20 plus or minus 0.25g, in ascending and descending order, and shall meet the voltage deviation requirements of Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Table II. Voltage Ratio Requirements for Preproduction and Periodic Tests

Acceleration in g units	Maximum allowable deviation from calculated voltage ratio
3 ±0.25	±.0149
7 ±0.25	±.0149
11 ±0.25	±.0077
13 ±0.25	±.0077
15 ±0.25	±.0077
20 ±0.25	±.0149

4.5.1.1.2 Transverse acceleration effects. The accelerometer shall be attached to the accelerometer acceptance tester, specified in 4.4.1a and rigidly mounted on the centrifuge swing arm. The sensitive axis of the accelerometer shall be perpendicular to a line radiating from the center of rotation and in a position where the arrow on the accelerometer case points upward. Using the tester, apply a voltage to terminals A and C, and measure the voltage ratio. Subject the accelerometer to an acceleration of 20g. The change in voltage ratio from that measured without acceleration shall be not greater than plus or minus 0.005. The test shall be repeated with the accelerometer rotated 90 degrees about its sensitive axis.

4.5.1.1.3 Natural frequency. Mount the accelerometer on the vibration testing machine specified in 4.4.2a, in such a manner that it will, in the static condition, sense 1g. Apply 10 volts DC across terminals A and C, using the power supply specified in 4.4.1c. Connect the vertical input of the oscilloscope, specified in 4.4.2d, across terminals A and B. Monitor the vibration velocity on the horizontal input of the oscilloscope. Subject the accelerometer to vibration along the sensitive axis as shown in Figure 1. Vary the frequency from 14 to 20 cps at 0.1-inch double amplitude. The frequency at which the output voltage is in phase with vibration velocity, as determined by the Lissajous figure, shall be 17 plus or minus 2 cps.

4.5.1.2 Temperature, storage condition. The accelerometer shall be subjected to a temperature of minus 65 plus 5 minus 0 degrees F for not less than 48 hours. The temperature shall be raised to plus 160 plus 0 minus 5 degrees F in not less than 2 hours and maintained at this temperature for not less than 48 hours. The unit shall then be subjected to room temperature for not less than 4 hours prior to performing subsequent tests.

4.5.1.3 Humidity. Unless otherwise specified in the contract or order, this test shall be performed on preproduction sample units only. The accelerometer shall be subjected to Humidity Test, Procedure I as specified in MIL-E-5272.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.5.1.4 Shock, standby condition. Subject the accelerometer to shocks of 40 plus or minus 4g peak magnitude with a pulse shape approximating a one-half sine wave, and a duration of 5 plus 3 minus 0 milliseconds. Shocks shall be applied three times in each direction along each of three mutually perpendicular axes as shown in Figure 1.

4.5.1.5 Vibration, standby condition. The accelerometer shall be subjected to the vibration tests for Type I equipment as specified in MIL-STD-167 up to 25 cps in each of the three axes shown in Figure 1.

4.5.1.6 Vibration, operating condition. The accelerometer shall be subjected to vibration from 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less, along each of three mutually perpendicular axes. The frequency shall be traversed uniformly from 20 to 2000 cps. The frequency shall be traversed in not less than 2.5 minutes, once in each axis.

4.6 Quality conformance inspection. Samples selected, using the plans and procedures set forth in Table III of this specification, shall be subjected to the tests and examinations as described in 4.6.1.

Table III. Quality Conformance Tests and Examinations and AQL

Test	Sampling Plan	AQL	Test Paragraph
Voltage ratio	*	*	4.6.1.1
Noise voltage	**	2.5	4.6.1.2
Circuit resistance	**	2.5	4.6.1.3
Insulation resistance	**	1.0	4.6.1.4
Temperature, low extreme	***	***	4.6.1.5
Temperature, high extreme	***	***	4.6.1.6
Visual examination	*	*	4.6.1.7
Preservation, packaging, packing and marking	*	*	4.7

*One-hundred percent inspection; defect is cause for rejection of individual unit.
**MIL-STD-105D Inspection Level II
***Ten (10) random units from each lot of 100 or less accelerometers; acceptance of this lot shall be based on no defects in the sample of 10 units.

4.6.1 Test procedure. The accelerometer shall be subjected to the tests and examinations as outlined herein. Unless otherwise specified, inability of the accelerometer to pass the tests and examinations shall constitute a failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.6.1.1 Voltage ratio. The accelerometer shall be attached to the accelerometer acceptance tester, specified in 4.4.1a, and rigidly mounted on the swing arm of the centrifuge, specified in 4.4.1b. The sensitive axis of the accelerometer shall be parallel to a line radiating from the center of rotation of the centrifuge, with the base away from the axis of rotation. Using the accelerometer acceptance tester, apply 10 plus or minus 0.2 volts DC between contacts A and C. Measure the ratio of the voltage across terminals A and B, and A and C at acceleration levels of 11 plus or minus 0.25g, 13 plus or minus 0.25g, and 15 plus or minus 0.25g in the direction of increasing acceleration; repeat these tests in reverse order in the direction of decreasing acceleration. The ratio of the two voltages shall equal the acceleration in g's multiplied by the constant shown in the following formula, plus or minus 0.0051. When these tests are performed subsequent to environmental tests of 4.5, the voltage ratio deviation shall not exceed the requirements of Table II:

$$\frac{\text{Voltage A and B}}{\text{Voltage A and C}} \quad (0.02145) \times (\text{acceleration in g's})$$

4.6.1.2 Noise voltage. Apply 10 volts DC across terminals A and C using the power supply specified in 4.4.1c, and induce a current of 0.100 milliampere at terminal B. The RMS (root-mean-square) value of the noise voltage, measured with the voltmeter specified in 4.4.1d, shall not exceed 10 millivolts at terminal B.

4.6.1.3 Circuit resistance. Measure the resistance between terminals A and C. using the resistance measuring device specified in 4.4.1f. The resistance shall be 8000 plus or minus 1000 ohms.

4.6.1.4 Insulation resistance. Measure the insulation resistance between terminal A and the case, using the megohmmeter specified in 4.4.1g. The resistance shall be not less than 20 megohms when a potential of 500 plus or minus 50 volts DC is applied.

4.6.1.5 Temperature, low extreme. The accelerometer shall be subjected to a temperature of 35 plus 5 minus 0 degrees F for not less than 4 hours, and while at this temperature, shall meet the voltage ratio deviation (VRD) requirements of Table IV. (See 6.3.2 and 6.3.3)

4.6.1.6 Temperature, high extreme. The accelerometer shall be subjected to a temperature of 120 plus 0 minus 5 degrees F for not less than 4 hours, and while at this temperature shall meet the VRD requirements of Table IV. (See 6.3.2 and 6.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Table IV. Voltage Ratio Deviation Requirements for High and Low Temperatures

Acceleration in g units	Maximum VRD	X (Average) VRD (Max)	(Standard deviation) VRD (Max)
11 ±0.25	0.0133	0.0077	0.0038
13 ±0.25	0.0133	0.0077	0.0038
15 ±0.25	0.0133	0.0077	0.0038

4.6.1.7 Visual examination. Visual examination shall be made on each accelerometer submitted for delivery to the procuring agency. The accelerometer shall be examined for conformance to the requirements of good workmanship in 3.5. Nonconformance is cause for rejection of individual unit.

4.7 Preservation, packaging, packing, and marking. The accelerometer shall be examined for conformance to the prescribed preservation, packaging, packing, and marking requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified. (See 6.2b and 6.4.)

5.1.1 Level A.

5.1.1.1 Cleaning. The accelerometer shall be cleaned in accordance with Process C-1 as specified in MIL-P-116.

5.1.1.2 Drying. The accelerometer shall be dried in accordance with Procedure D-2 as specified in MIL-P-116.

5.1.1.3 Unit packaging. The accelerometer shall be individually packaged in accordance with Method 1A-8 as specified in MIL-P-116.

5.1.1.4 Intermediate packaging. Intermediate packaging of the accelerometer shall be in accordance with the applicable drawings or as specified in the procurement document.

5.1.2 Level C. Cleaning, drying, preservation, and packaging shall be in accordance with the supplier's commercial practice, when such practices have been approved by the procuring activity.

5.2 Packing. Packing shall be Level A or C as specified. (See 6.2c and 6.4.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Unless otherwise specified in the contract, order, or requisition, the accelerometer shall be packed in exterior type containers, PPP-B-621, of uniform size and shape, with minimum cube and tare consistent with the protection required. The gross weight of each pack shall be limited to approximately 100 pounds. Containers shall be provided with a case liner, MIL-L-10547, and shall be closed and strapped in accordance with PPP-B-621.

5.2.2 Level C. The accelerometer, packaged as specified in 5.1.2, shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with common carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special markings required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use and description.

6.1.1 Intended use. The accelerometer is intended to be used in the Range and Airframe Separation Programmer.

6.1.2 Description. The accelerometer is a device which, through the movement of a seismic mass, varies resistance linearly when subjected to acceleration of 0 to 20g.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Required level of preservation and packaging

c. Required level of packing

d. Any exceptions to this specification

6.2.1 Additional samples. Additional samples required because of failure of any sample(s) to pass the prescribed inspections shall be provided and inspected at the expense of the supplier.

6.3 Definitions. For the purpose of this specification the following definitions have been established.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

6.3.1 Unit condition.

6.3.1.1 Operating. Operating is the condition of the accelerometer when performing its required function.

6.3.1.2 Standby. Standby is the condition of the accelerometer when aboard ship and is:

a. Stored, handled or transported.

b. Assembled with the end item and installed on the launching mechanism prior to operation.

6.3.2 Average voltage ratio deviation ($\bar{X}$). Two average values of voltage ratio deviation shall be determined as follows:

a. $\bar{X}_I$ shall be the sum of the voltage ratio deviations of the 10 accelerometers at each g level in the direction of increasing acceleration divided by 10.

b. $\bar{X}_D$ shall be the sum of the voltage ratio deviations of the 10 accelerometers at each g level in the direction of decreasing acceleration divided by 10.

The values of $\bar{X}_I$ and $\bar{X}_D$ shall be considered independently when compared to the requirements of Table IV.

6.3.3 Standard deviation (σ). The standard deviation of the 10 accelerometers shall be determined at each g level specified in Table IV and shall be determined by the following formula.

$$\sigma = \sqrt{\frac{\sum\left(X_I^2 + X_D^2\right) - \left[\frac{\left(\sum X_I\right)^2 + \left(\sum X_D\right)^2}{10}\right]}{18}}$$

Where: X_I = Voltage ratio deviation in the direction of increasing acceleration

X_D = Voltage ratio deviation in the direction of decreasing acceleration

6.3.4 Unit of Acceleration g. As a unit of acceleration, g is expressed as one gravitational unit equal to 32.174 ft/sec^2 at sea level.

6.4 Preparation for delivery criteria. Criteria for use of the proper level of preservation, packaging, and packing shall be as specified in FED-STD-102.

*U.S. GOVERNMENT PRINTING OFFICE: 1968-301-515/3155

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-A-82516(OS) ACCELEROMETER

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426

C-6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Ordnance Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL ORDNANCE SYSTEMS COMMAND (ORD 9343)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.