MIL-O-82295B
17 February 1984
SUPERSEDING
MIL-O-82295A
19 January 1977

MILITARY SPECIFICATION

OVERSHOES, MEN'S DRESS, STRETCH-TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for low unsupported stretch-type overshoes.

* 1.2 Classification The overshoes shall be of one type and in the styles specified herein, and shall be procured in the following sizes to accomodate the related size of shoe as specified (see 6.2).

Size	Related shoe size	Style
Small	6 to 7 1/2	a. Sandal b. Galocha
Medium	8 to 9	
Large	9 1/2 to 11	
Extra-Large	11 1/2 to 13	

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-601 - Rubber; Sampling and Testing

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-284 - Visual Inspection Guide for Rubber Footwear

(Copies of specifications, standards, drawings,and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings and publications The following other Government publication forms a part of this specification to the extent specified herein.

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

2.1.3 Order of precedence In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

2.2 Other publications The following documents form a part of this specification to the extent specified herein. The issue of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING MATERIALS STANDARDS

Method ASTM D-1630 - Abrasion Resistance of Rubber Compounds for Soles and Heels

(Application for copies shall be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Traffic Dept., 1616 P. Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2 and 6.4).

3.3 Materials

3.3.1 Rubber compound The rubber compound used in the manufacture of the overshoes shall be made of a natural or synthetic rubber or a combination thereof. The rubber compound shall be pigmented a suitable black shade, and shall conform to the finished physical requirements specified in Table I when tested as specified in 4.3.1.

Table I - Physical requirements of rubber compound

Characteristic	Requirement	
	Minimum	Maxium
Tensile strength:		
Initial, p.s.i.	2,000	-
After accelerated aging, percent loss	-	30
Tensile stress, p.s.i.		
200 percent elongation	250	-
400 percent elongation	650	-
600 percent elongation	1500	-
Elongation at rupture:		
Initial percent	550	-
After accelerated aging, percent loss	-	30
Hardness	50 ± 5	
Abrasive index		
Initial	35	-
After accelerated aging	25	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

3.4 Design The overshoes shall be of a pull-on stretch rubber type, consisting of either a sandal or galocha style with a tread pattern on the sole and heel. The type of tread pattern shall be as furnished by the supplier's molds.

3.4.1 Figure Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.4.2 Molds The molds used to produce the applicable style overshoes shall be furnished by the contractor.

3.5 Construction The overshoes shall be constructed as an unlined unit, with the upper, sole and heel one continuous unit.

3.6 Thickness The thickness of the various component parts of the applicable style overshoes shall be as shown in Table II when tested as specified in 4.3.2.2.

Table II - Thickness requirements (min)

Component	Style	
	Sandal	Galocha
Sole and heel, including tread	0.135 inch	0.110 inch
Sole and heel base	0.100 inch	0.075 inch
Upper	0.030 inch	0.030 inch
Reinforced areas	0.0375 inch	0.0375 inch

3.7 Finish The overshoes shall be vulcanized and treated to eliminate tackiness and have a smooth finish. All mold flashings shall be trimmed and all inside corners rounded and made smooth.

3.8 Marking Each overshoe shall have the size and contractor's name molded on the outsole in the shank area, with the height of characters governed by the contractor's mold. "Left" and "Right" designation may be included.

3.9 Workmanship The finished overshoes shall conform to the quality established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.3.2 and 4.3.2.2 for compliance with design, construction, workmanship and thickness requirements.

4.3 Inspection Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

4.3.1 Component and material inspection In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, the rubber compound shall be tested for the characteristics specified in Table III and in accordance with the referenced test methods of FED-STD-601. Testing for all the requirements listed in Table III is applicable to the sample unit. All test reports shall contain the individual values utilized in expressing the final result. A lot shall consist of the amount of rubber produced or compounded in one day. The sample unit for testing shall consist of specimens as shown below, taken from a representative composite of the lot. The composite sample of rubber shall be vulcanized and treated in the same manner employed in the manufacture of the overshoes:

a. Two pieces 6 by 6 inches by 0.075 inch in thickness for the tensile strength, tensile stress, and elongation tests.

b. Two pieces 6 by 6 inches by 0.250 inch in thickness for the hardness and abrasive tests.

The lot shall be unacceptable if one or more units fail to meet any requirements specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

Table III - Rubber compound testing

Characteristic	Requirement Paragraph	Test Method
Material identification	3.3.1	1/
Tensile strength:		
Initial	3.3.1	4111
After accelerated aging	3.3.1	4111, 7221
Tensile stress: 2/		
200 percent	3.3.1	4131
400 percent	3.3.1	4131
600 percent	3.3.1	4131
Elongation at rupture:		
Initial	3.3.1	4121
After accelerated aging	3.3.1	4121, 7221
Hardness	3.3.1	3021
Abrasive Index:		
Initial	3.3.1	ASTM Method D-1630
After accelerated aging	3.3.1	ASTM Method D-1630

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirements.
2/ The modulus curve shall be carried to the break point.

4.3.2 Examination of the end item The defects found during the examination of the end item shall be classified in accordance with Table I of MIL-STD-284, 4.3.2.1, and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.2.3. The lot size shall be expressed in units of one overshoe each. The sample unit shall be one overshoe and selection shall be by pairs. Defects for pairing shall be classified as a single defect.

4.3.2.1 Visual examination

Defects	Classification Major	Minor
Style and construction not as specified	X	
Inside corners not rounded and smooth		X
Mold flashings not adequately trimmed i.e., uneven or incomplete area		X
Tread pattern not conforming to the suppliers mold	X	
Marking on the outside omitted, incorrect, illegible, misplaced, or not accomplished as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

4.3.2.2 Thickness examination The finished overshoes shall be examined for thickness in the areas specified in 3.6 and in accordance with test method 2011 of FED-STD-601. Any measurement below the minimum requirement specified shall be classified as a defect.

4.3.2.3 Inspection levels and acceptable quality levels (AQL's) The inspection levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

		AQL's	
	Inspection level	Major	Total
For defects applicable to 4.3.2.1	II	6.5	15.0
For defects applicable to 4.3.2.2	S-3	-	4.0

4.3.3 Examination of packaging requirements An examination shall be made to determine that packaging, packing, and marking comply with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, or inadquate stapling, bulging or distortion of container.
Content	Number of pairs per shipping container is more or less than specified.

*4.3.4 Palletization examination An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.

5. PACKAGING

* 5.1 Preservation Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A Each pair of overshoes of one style and size only, shall be placed heel to toe with the uppers facing each other. Each pair of overshoes shall be securely bound with an elastic band or cotton twine.

* 5.1.2 Level C (Commercial) Overshoes shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets this requirement. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A Sixty (60) pairs of overshoes of one style and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 3A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety SW or DW, grade 275 of MIL-B-17757. Toward the end of the contract or order, or when there are less than the required amounts of the same style and size, mixed sizes of the same style may be packed within the same shipping container.

* 5.2.2 Level B Sixty (60) pairs of overshoes of one style and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 275, size 3A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety SW or DW, grade 275, of MIL-B-17757. Toward the end of the contract or order, or when there are less than the required amount of the same style and size, mixed sizes of the same style may be packed within the same shipping container.

* 5.2.3 Commercial Overshoes, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

* 5.3 Palletization When specified (see 6.2), overshoes, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-ST-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

* 5.4 Marking In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

* 5.4.1 Labels, mixed sizes Each shipping container, packed with mixed sizes of one style only, shall have securely attached to the end and side directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use The overshoes covered by this specification are intended for wear over dress shoes of male Navy and Air Force personnel.

* 6.2 Ordering data Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size(s) and style(s) required (see 1.2).
(c) When a first article sample is required (see 3.2, 4.2 and 6.4).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When palletization is required (see 5.3).

6.3 Samples For access to samples, address the procuring activity issuing the invitations for bids.

* 6.4 First article When a first article is required, it shall be inspected and approved. The first article shall be a pre-production sample. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

* 6.5 Marginal notations The margin of this specification is marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire contents irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - NU
Air Force - 11


Review activity:
Air Force - 82, 99

User activity:
Air Force - 45


Preparing activity:
Navy - NU

Project No. 8430-0323

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

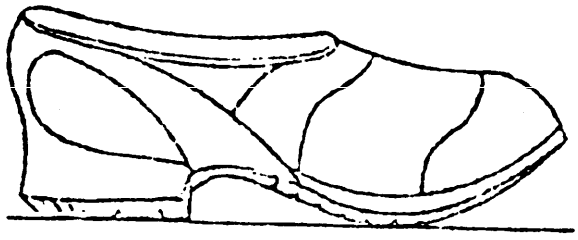

SANDAL

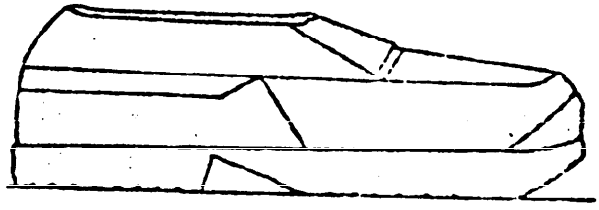

GALOCHA

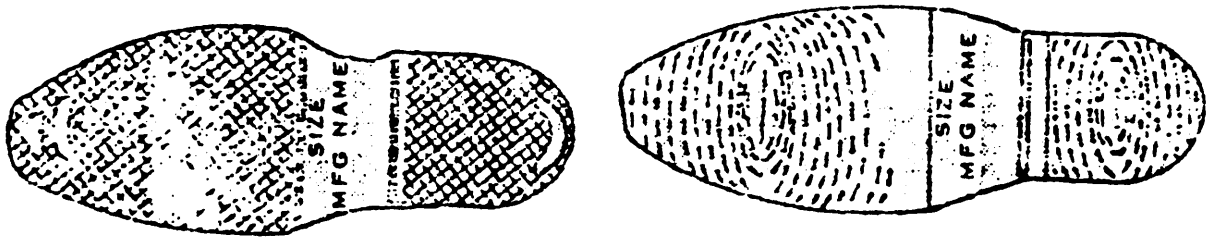


FIGURE 1

OVERSHOES, MEN'S, DRESS, STRETCH TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-O-82295B	Overshoes, Men's, Dress, Stretch-Type

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:00Z
Check the source to verify that this is the current version before use.