INCH-POUND

MIL-P-70596B (AR)
23 January 1991
SUPERSEDING
(See 6.6)

MILITARY SPECIFICATION

POWER BOARD: 9361073

This specification is approved for use within the U. S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general and detail requirements for the Power Board used in the M61A1 Director Sight which provides the signals to control the optical line of sight. This is a double-sided, four-inch round board that fits in the sight. It has four microcircuits and other components, and is used as a servo preamplifier and for servo compensation (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926	-	Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 - Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (See 6.4)

U. S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

9361071 - Schematic Diagram Power Board
9361073 - Power Board, Assembly Drawing
10545465 - Isolator

SPECIAL PACKAGING INSTRUCTIONS

PS 9361073 - Packaging of Power Circuit Board

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 9361073, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the power board shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.
b. Inorganic protective surface finishings.
c. Part identification and marking.
d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The power board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
5-23 hertz	0.076 inches double amplitude
23-40 hertz	2 g
40-120 hertz	4 g
120-200 hertz	2.5 g
200-500 hertz	4 g

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 5-500-5 Hertz sweep time is 15 minutes ± 10%.

3.3.2 Shock. The power board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The power board shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.3.2 Non-operating. The power board shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The power board shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 deg F and +155 deg F.

3.3.4.2 Non-operating (storage). The power board shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg F for a period of 24 hours and +160 deg F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The power board shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram 9361071.

3.5 Performance.

3.5.1 Functional description. The power board shall be a dual channel amplifier board, one channel for azimuth and one channel for elevation. Each channel shall sum the command rate voltage with the gyro rate voltage, producing an error output which is amplified by an external amplifier. The board shall also utilize networks to control the frequency response for improved servo stability.

The power board shall include diodes to protect the power amplifier from high voltage transients due to the back electromotive force of the torque motor.

The azimuth amplifier has an input from the elevation gyro and the elevation amplifier has an input from the azimuth gyro. These cross axis inputs (quadrature inputs) cancel out the mechanical misalignments of the gyros.

Any signal appearing on the command input line and the command input return line (common mode) will be cancelled out.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

3.5.2 Input/output connection. Input/output connections shall be as specified in Tables I (Power connections), II (Azimuth connections) and III (Elevation connections).

TABLE I. Power connections.

PIN	FUNCTIONS	DESCRIPTION/VOLTAGE RANGE
C	+24 volts dc ± 10%	1 amp, +21.6 to +26.4 Vdc
S	-24 volts dc ± 10%	1 amp, -21.6 to -26.4 Vdc
R	Power return	Ground
M	Power return	Ground
N	Power return	Ground
T	Signal return	Ground
Y	Signal return	Ground
U	Signal return	Ground
W	Cmd input common Az & El	Ground

TABLE II. Azimuth connections.

PIN	FUNCTIONS	DESCRIPTION/VOLTAGE RANGE
D	Gyro test output	-5 to +5 Vdc
A	Gyro rate voltage input	-5 to +5 Vdc
H	Command rate voltage input	-10 to +10 Vdc
P	Torque motor current feedback	-6 to +6 Vdc
L	Error signal output to power amp	+1 to -1 Vdc
E	Torque motor transient protection diodes	-25 to +25 Vdc
K	Torque motor transient protection diodes	-25 to +25 Vdc

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the current version before use.

TABLE III. Elevation connections.

PIN	FUNCTIONS	DESCRIPTION/VOLTAGE RANGE
b	Gyro test output	-5 to +5 Vdc
V	Gyro rate voltage input	-5 to +5 Vdc
d	Command rate voltage input	-10 to +10 Vdc
c	Torque motor current feedback	-6 to +6 Vdc
Z	Error signal output to power amp	-1 to +1 Vdc
B	Torque motor transient protection diodes	-25 to +25 Vdc
F	Torque motor transient protection diodes	-25 to +25 Vdc

3.5.3 Power requirements. The power board power requirements shall be as specified in Table I.

3.5.4 Gyro drift requirements. The board shall be capable of nulling gyro drifts to .2 degrees per second by utilizing a 10 millivolt dc offset voltage.

3.5.5 Electrical. The board shall be capable of electrically correcting ± 0.5 milliradian misalignments in the mechanical alignments of the gyro.

3.5.6 Servo stability requirements. The board shall sum the command voltage with the gyro rate voltage and produce an error voltage. This error voltage shall be amplified and compensated to insure servo stability.

3.5.7 Spare pins. The power board shall have the following spare pins: J, a, X.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task) F of paragraph 1.2 of MIL-STD-2000.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5 and all applicable drawings. The inspection set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F
b.	Relative humidity	90% RH max.
c.	Pressure	28 to 32 inches of Hg

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three (3) power boards for inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. First article assemblies, components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table IV (Functional Test) and Table V (Special Sampling) herein and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the current version before use.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table IV shall be performed on a 100% basis.

TABLE IV. Functional tests (100 percent inspection).

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:	None	N/A

4.5 Special sampling. One circuit card out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table IV and shall then meet the tests in Table V. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE V. Special sampling.

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity	3.3.5	4.7.1.5
Minor:	None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table VI (Test Equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

TABLE VI. Test equipment list.

ITEM NUMBER		DESCRIPTION
1.	Test Set	See Figure 1 and Table VII.
2.	Frequency Response Analyzer Sweep Oscillator Vector Voltmeter	Dual Channel, IEEE 488 bus 1 to 5000 Hz 0.01 to 10 V rms output 30 mV to 30 V or equivalent
3.	Plotter	IEEE 488 bus, Hewlett Package Graphics Language or equivalent
4.	Digital Voltmeter	10 megohm impedance 3 mV to 30 Vdc
5.	Continuity checker	Standard ohmmeter 0.1 ohm accuracy
6.	Isolator	10545465

TABLE VII. Parts list for power board test circuit.

NOMENCLATURE	DESCRIPTION
PS1	±24 Vdc ± 10%, 1A minimum
PS2	±15 Vdc ± 10%, 1A minimum
S2	4 pole, double throw, 1A minimum
S1	7 pole, 6 position switch, 0.25A minimum
AR1	OP Amp, Burr Brown 3571 or equivalent
AR2	OP Amp, Texas Instruments TL072 or equivalent
P1	Connector M28748/8E00GIA
C1 thru C4	0.1 uF, 50 V
C5	1.5 uF, 50 V
C6	1000 pF, 50 V
R1	100 Kohms ± 2%, 1/4 W
R2	37 ohms ± 1%, 2 W
R3	10 ohms ± 1%, 2 W
R4, R5	250 Kohms ± 1%, 1/4 W
R6	120 Kohms ± 2%, 1/4 W

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

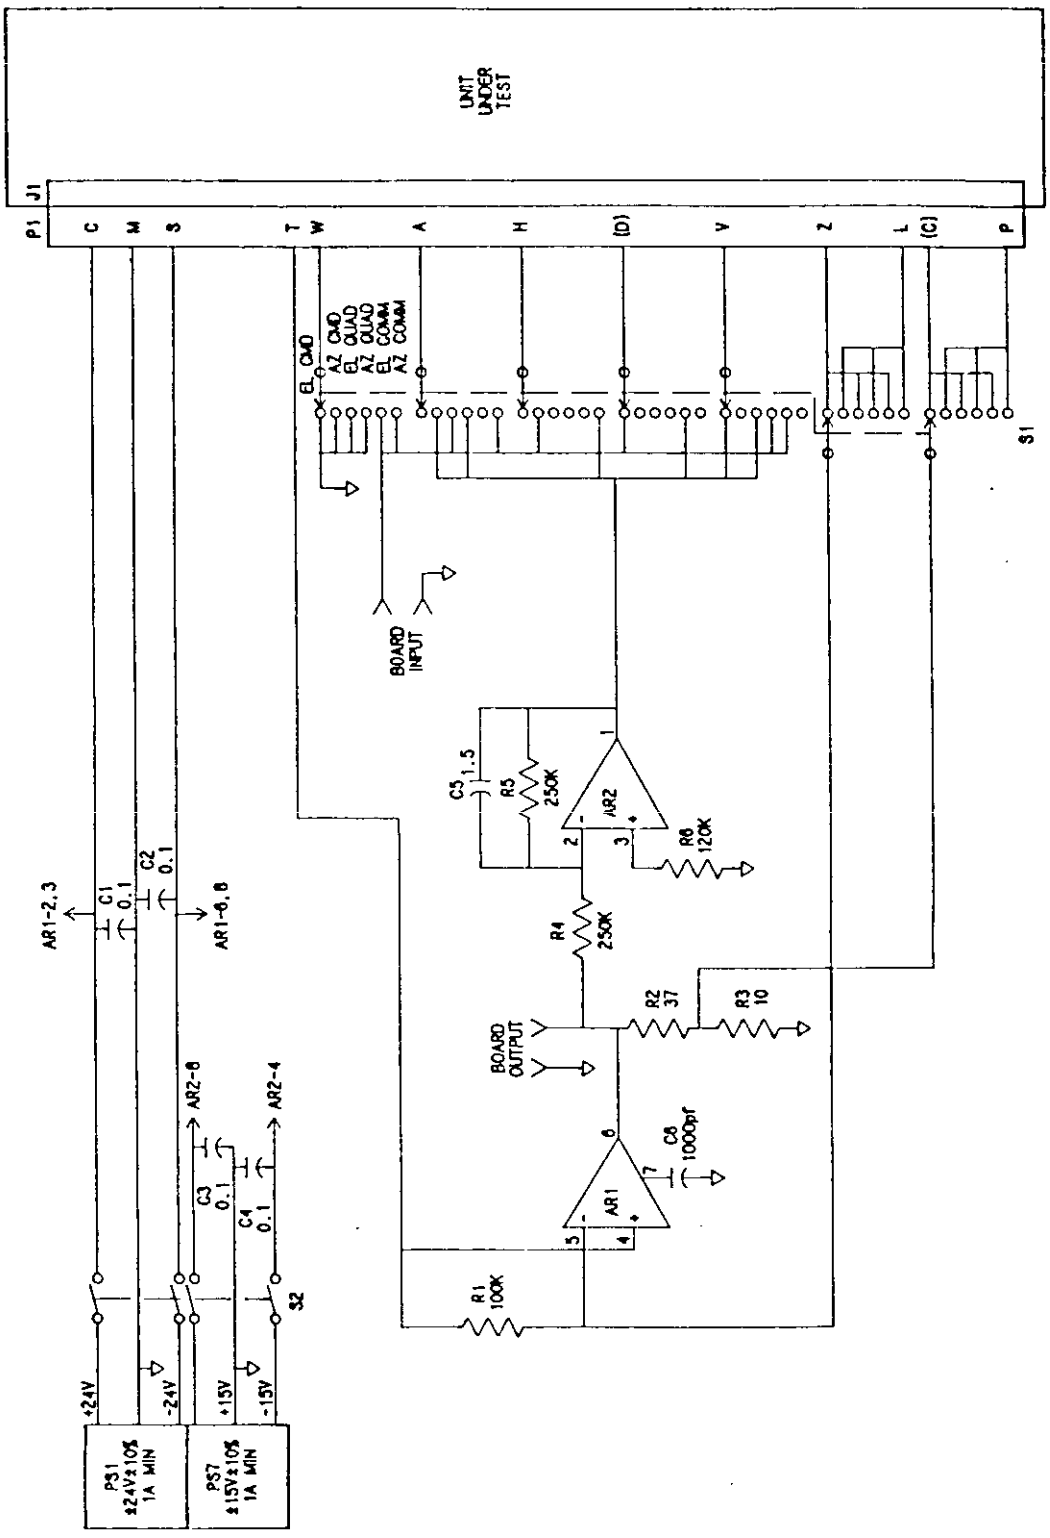


FIGURE 1. Power board test circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the current version before use.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The power board shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the power board shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 Hertz.

After the application of all the shock impulses, the power board shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in Procedures II and III, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

4.7.3 Performance. The performance shall be evaluated using the equipment listed in Table VI.

a. Connect board under test to test set, Figure 2. Set all board under test controls fully clockwise. Set digital voltmeter to measure dc volts. Measure the bias on pin 3 of U1. The bias shall be between +9 and +15 mV. Rotate R31 fully counterclockwise. The bias at pin 3 shall be between +9 and +15 mV. Set R31 at midpoint. Measure the bias on pin 5 of U1. The bias shall be between +9 and +15 mV. Rotate R11 fully counterclockwise and measure the bias on pin 5. The bias shall be between +9 and +15 mV. Set R11 at midpoint.

b. Connect the sweep oscillator section of the frequency response analyzer to the BOARD INPUT of the test set. Connect BOARD OUTPUT of test set to vector voltmeter section of analyzer. Set input switch S1 on test set to EL COMMAND. Run elevation gain response and phase response from 1 to 5000 Hz. The input shall be a sine wave of 0.1 volts rms. The gain response shall fall within the limits shown in Figure 3. The elevation phase response shall fall within the limits shown in Figure 4.

c. Set switch S1 on test set to EL QUADRATURE. Set sweep oscillator (of frequency response analyzer) to 30 Hz sine wave, 0.1 volts rms. The elevation quadrature gain shall be between -5 and +1 DB.

d. Set switch S1 on the test set to EL COMMON. Set sweep oscillator (of frequency response analyzer) to 30 Hz sine wave, 0.1 volts rms. The elevation common mode gain shall be between -14 DB and -8 DB.

e. Set switch S1 on test set to AZ COMMAND. Repeat 4.7.3b. The azimuth gain response shall fall within the limits shown in Figure 5. The azimuth phase response shall fall within the limits shown in Figure 6.

f. Set switch S1 on test set to AZ QUADRATURE and repeat 4.7.3c. The azimuth quadrature gain shall be between +1 and +7 DB.

g. Set switch S1 on test set to AZ COMMON. The azimuth common mode gain shall be between -2 and -8 DB.

h. Set all board under test controls at midrange.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in paragraph 3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

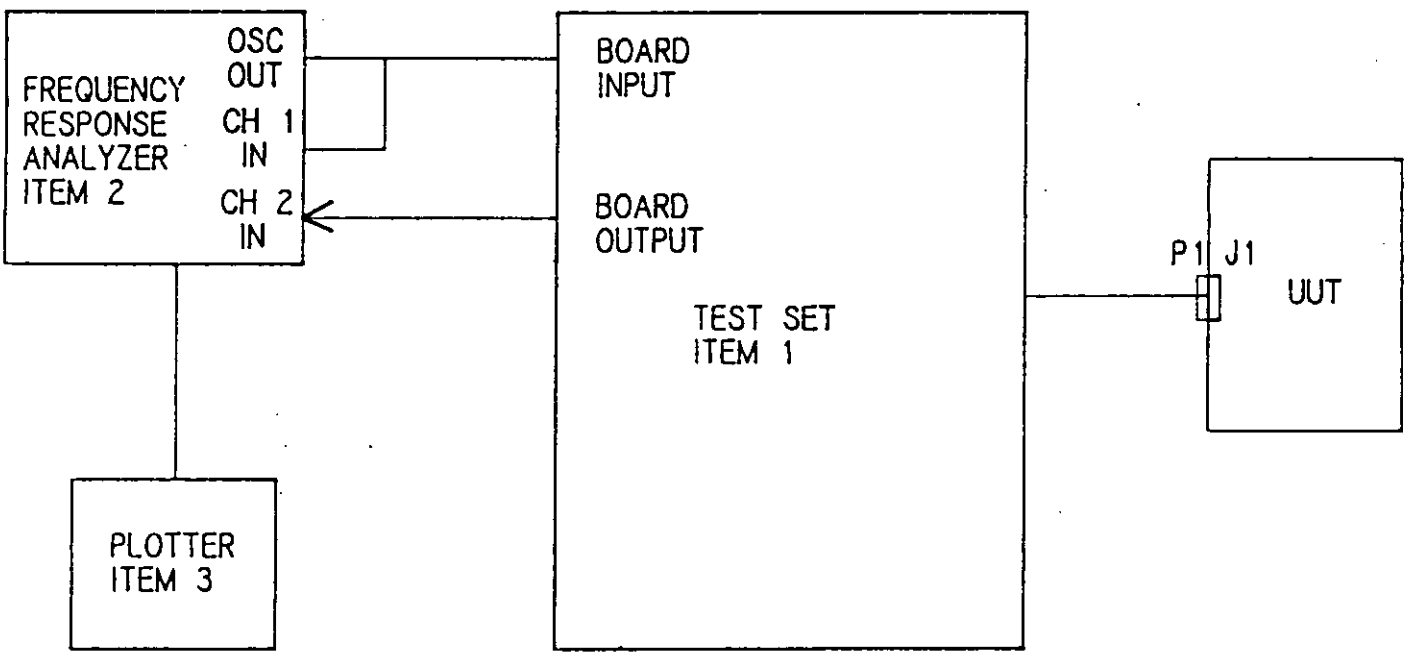


FIGURE 2. Power board test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the current version before use.

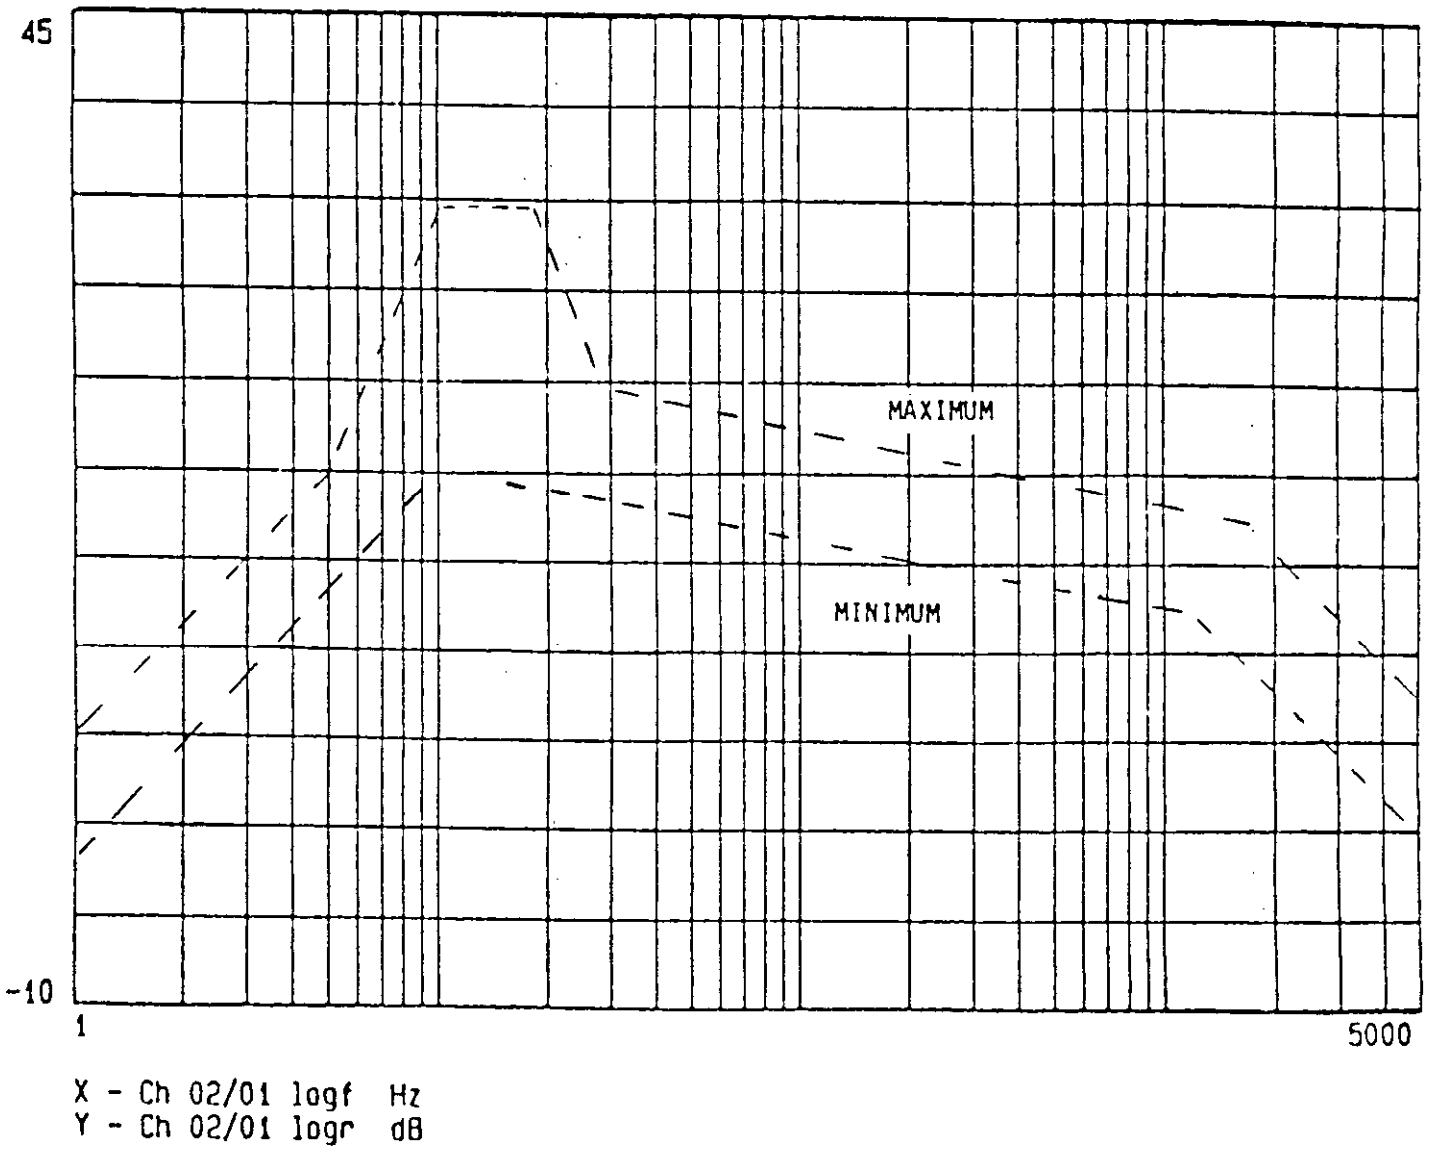


FIGURE 3. Elevation gain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

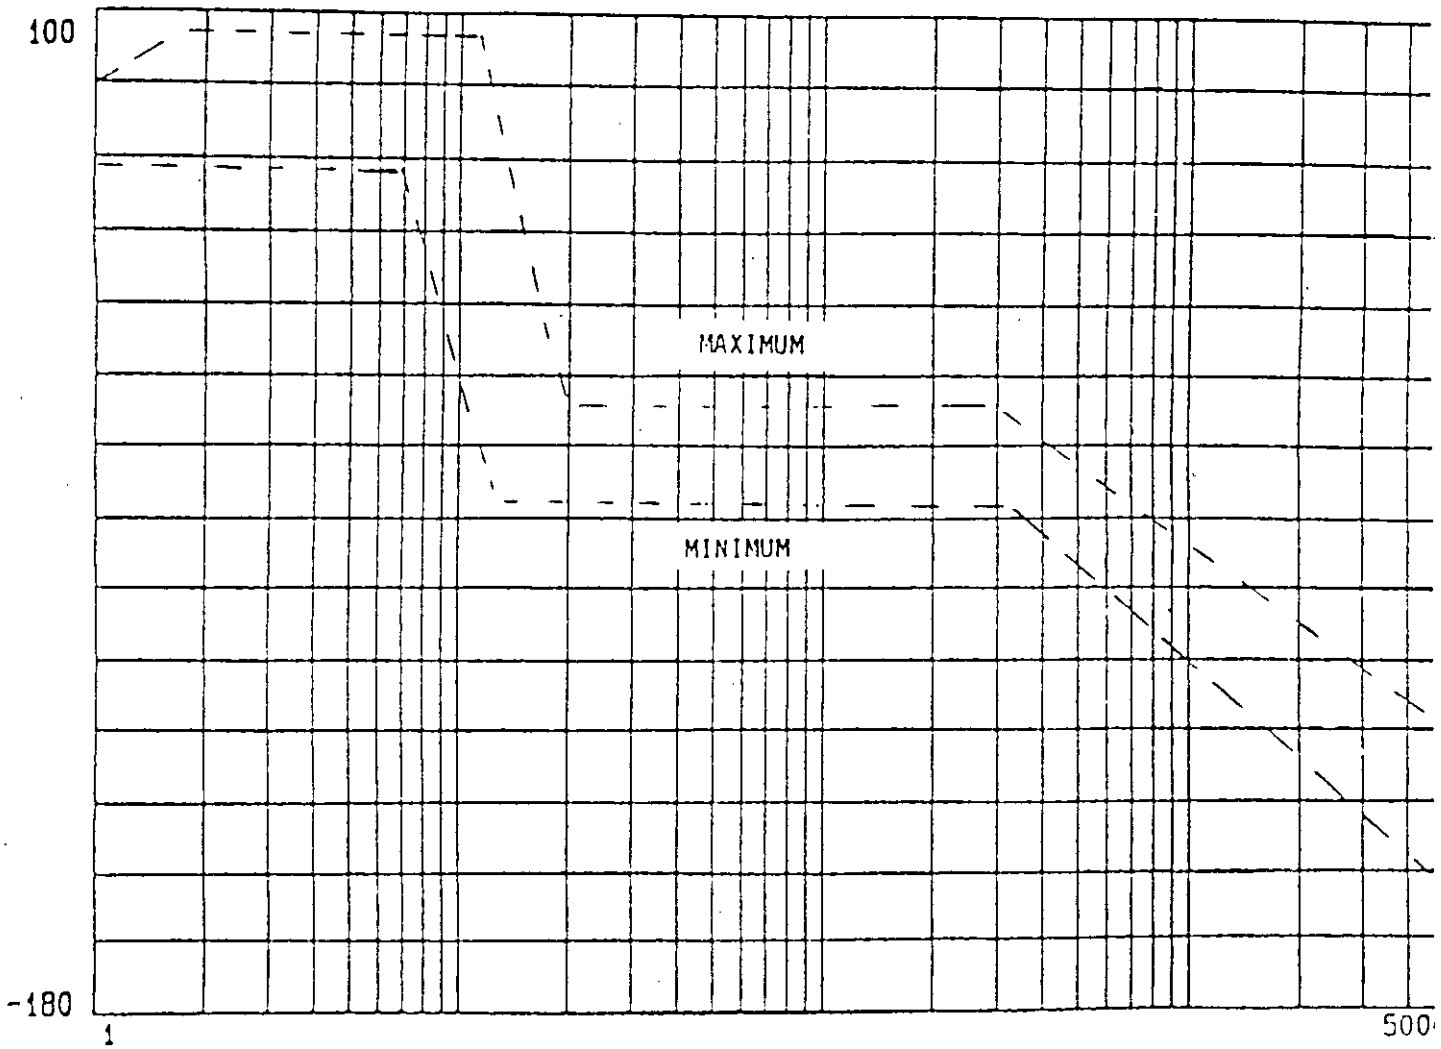


FIGURE 4. Elevation phase.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the current version before use.

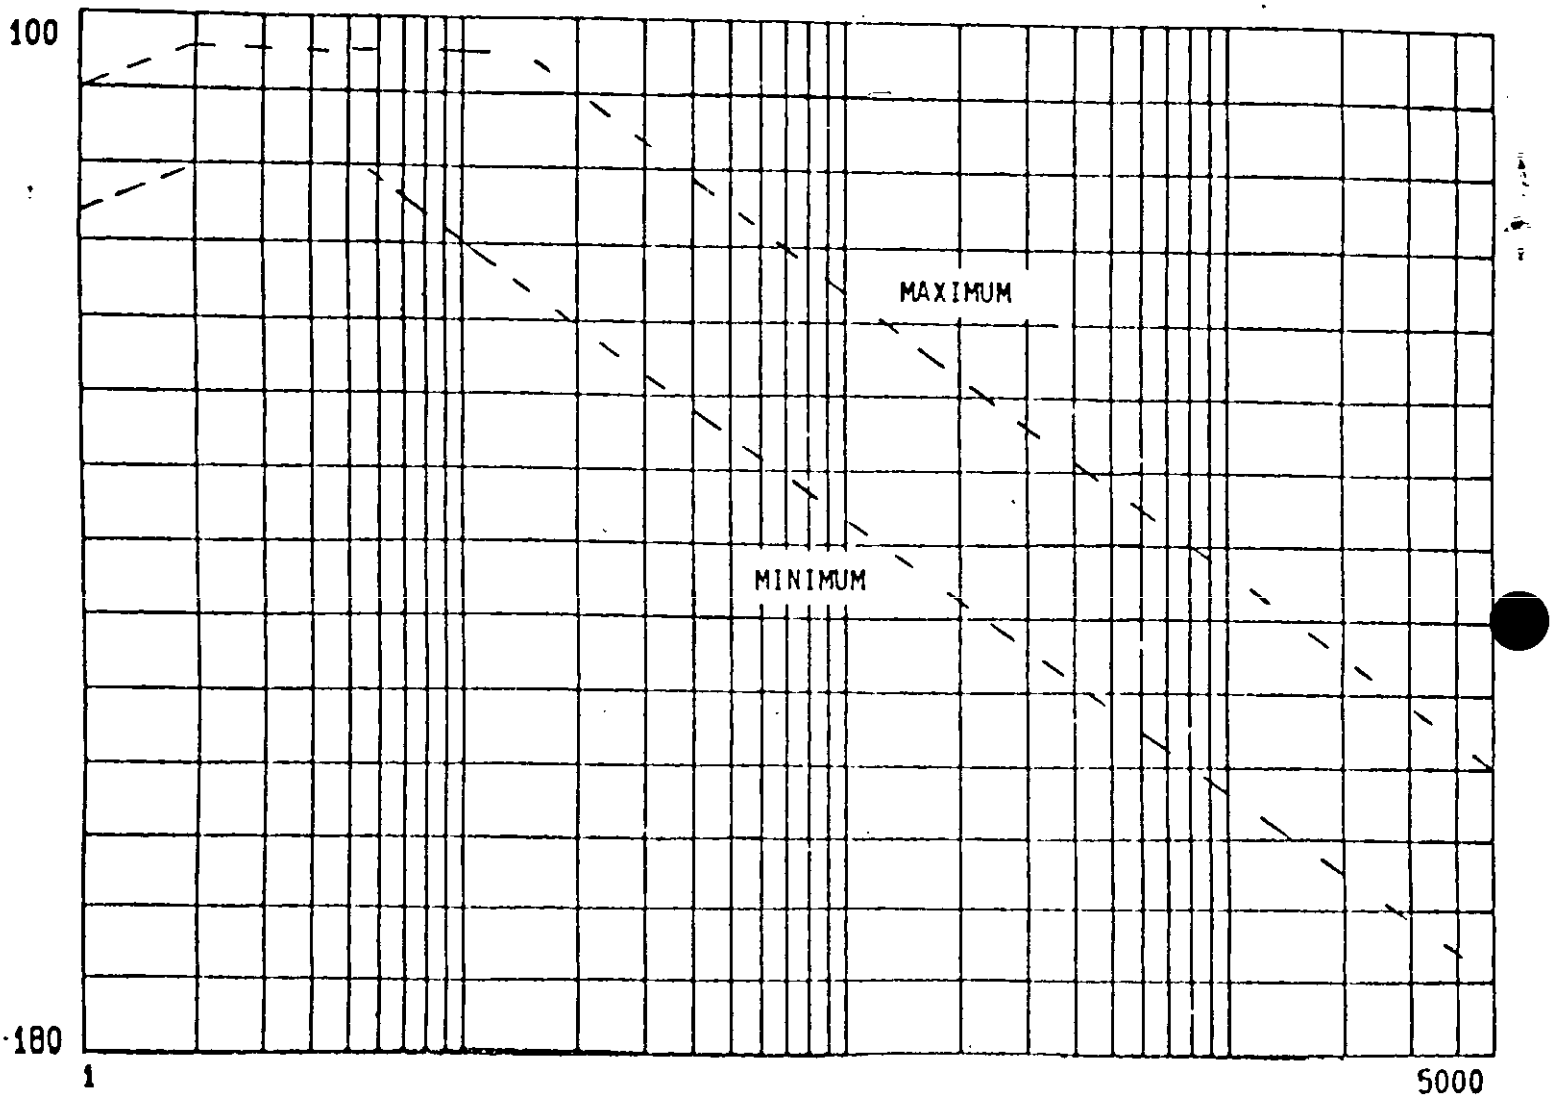


FIGURE 5. Azimuth gain.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the current version before use.

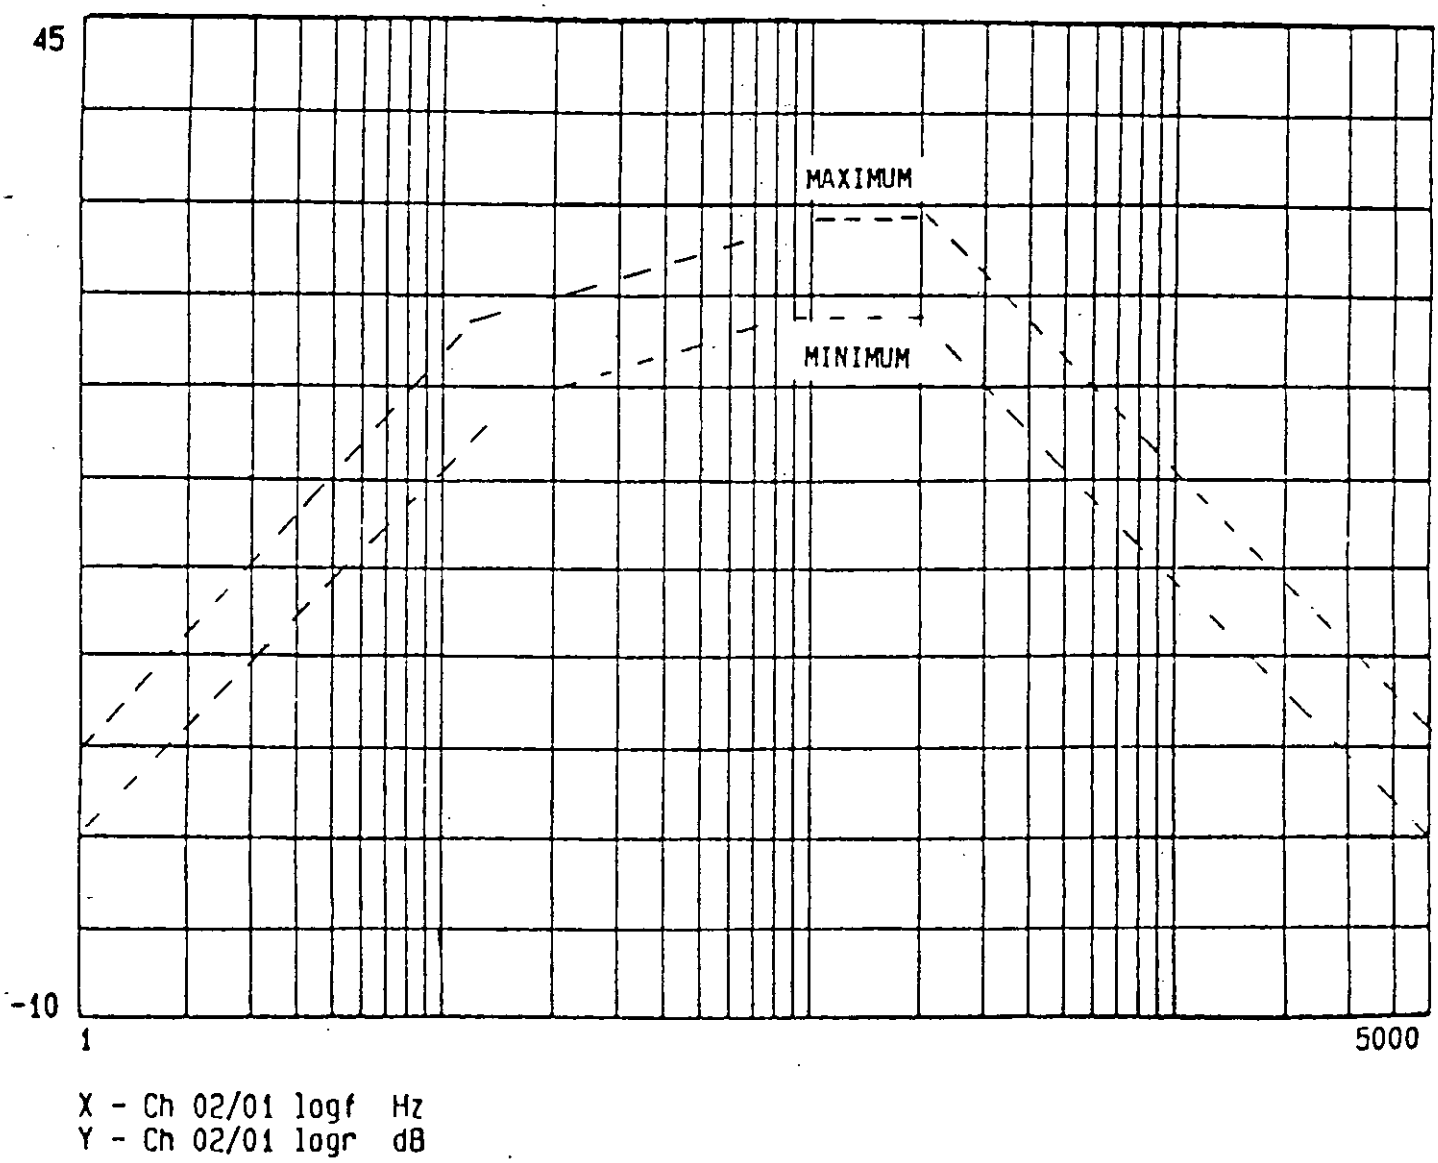


FIGURE 6. Azimuth phase.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Special Packaging Instructions PS 9361073.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The power board shall be used in the M61A1 Director Sight in the PIVADS self-propelled and towed vehicles.

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c. First article sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of conformance for each lot or shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, Attn: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Fire Control System
Director Sight, M61A1
Product Improved Vulcan Air Defense System (PIVADS)

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:46Z
Check the source to verify that this is the currentversion before use.

6.6 Changes from previous issue. The previous issues were for ARDEC internal use only. They were not forwarded to Naval Publication and Forms Center (NPFC) for publication. This issue is the initial public release of unlimited distribution.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A750)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-70596B (AR)	23 January 1991

3. DOCUMENT TITLE: POWER BOARD: 9361073

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:46Z
Check the source to verify that this is the current version before use.