
MILITARY SPECIFICATION SHEET


BATTERY, DRY, BA-3200/U


This specification sheet is approved for use by the Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-49030(EL).

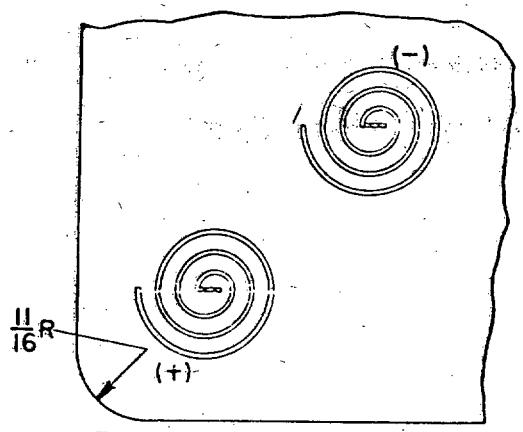


TOP VIEW SHOWING ALTERNATE CORNER CONSTRUCTION

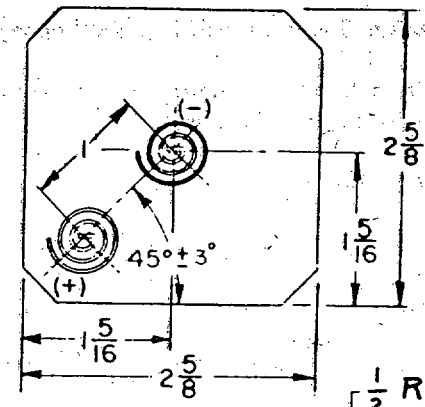

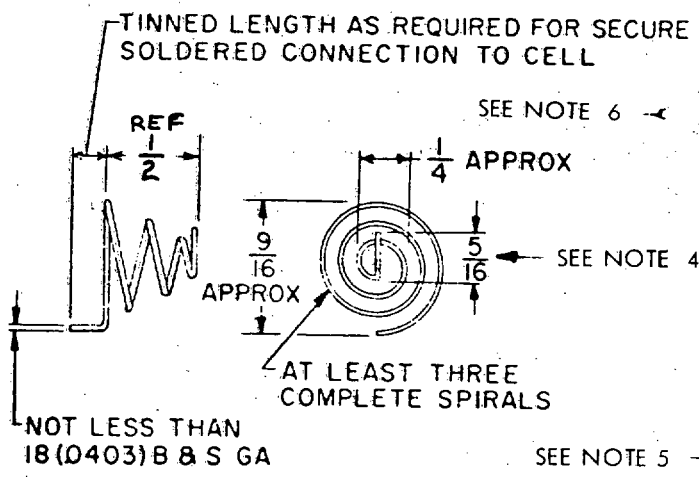

TERMINAL COIL SPRING

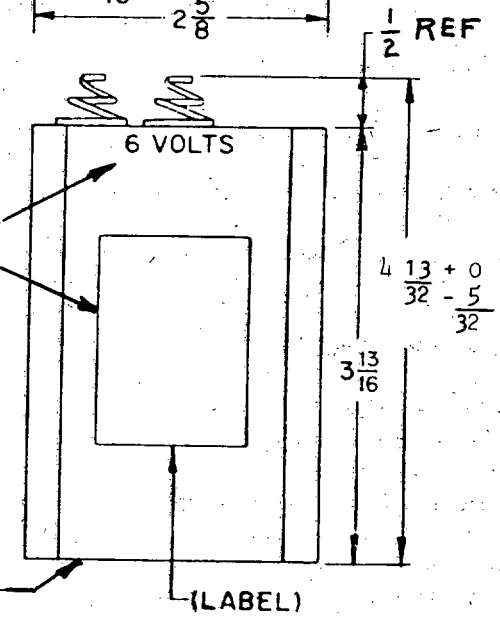

SEE NOTE 7

INCHES	MM
1/16	1.59
1/8	3.18
5/32	3.97
1/4	6.35
5/16	7.94
1/2	12.70
9/16	14.29

INCHES	MM
11/16	17.46
1	25.40
1 - 5/16	33.34
2 - 5/8	66.68
3.25	82.55
3-13/16	96.84
4	101.60
4-13/32	111.92

FSC 6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ± 1/16 inch.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. The battery shall pass freely through a cylindrical tube 3.25 inches I.D. by 4 inches long.
4. The 5/16 straight portion is optional.
5. A metallic jacket is required.
6. Label and voltage markings shall appear on same side, which may be any one of four.
7. Code date may be shown on the bottom of the battery with an annotation on the battery label indicating the code date location.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 6 volts.

Usual number and type of cells: 4 "F" cells.

Usual cell connection: Series

Terminals: Two coil springs.

Weight (maximum): 1 pound, 15 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be as specified herein.

First Article inspection:

Vibration test.
Mechanical-shock test.
Insulation-resistance test.
Visual and mechanical (external and internal).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test.
Capacity: I, LT, and HT.

Quality conformance inspection:

Visual and mechanical (external).
Dimensions and weight.
Battery voltage.
Insulation-resistance test.
Waterproofing-of-jacket test.
Vibration test.
Mechanical-shock test.
Capacity: LT, HT, T and D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Methods of examinations and test:

Capacity tests: See requirements for capacity specified herein.

Test	Storage period	Temperature	Minimum Svce Req'd (Hrs)
I (Initial 70°F)	48 Hrs Min.	70°F	33
LT (0°F)	16 Hrs Min.	0°F	10
HT (160°F)	7 days plus	160°F	
	48 Hrs Min.	70°F	30
T	13 Wks plus	113°F	
	48 Hrs. Min.	70°F	32
D	52 Wks	70°F	32

Discharge - The battery shall be discharged through 16.7 ohms continuously to an end voltage of 3.6 volts.

Closed circuit voltage: Use TS-183( )/U per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use a load resistance value of 34.88 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
8	5.60

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - EL

Preparing Activity
Army - EL

(Project 6135-A142-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.