
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-3955/TA

This specification sheet is approved for use by the Electronics Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery type described herein shall consist of this document and the latest issue of Specification MIL-B-49030(ER).

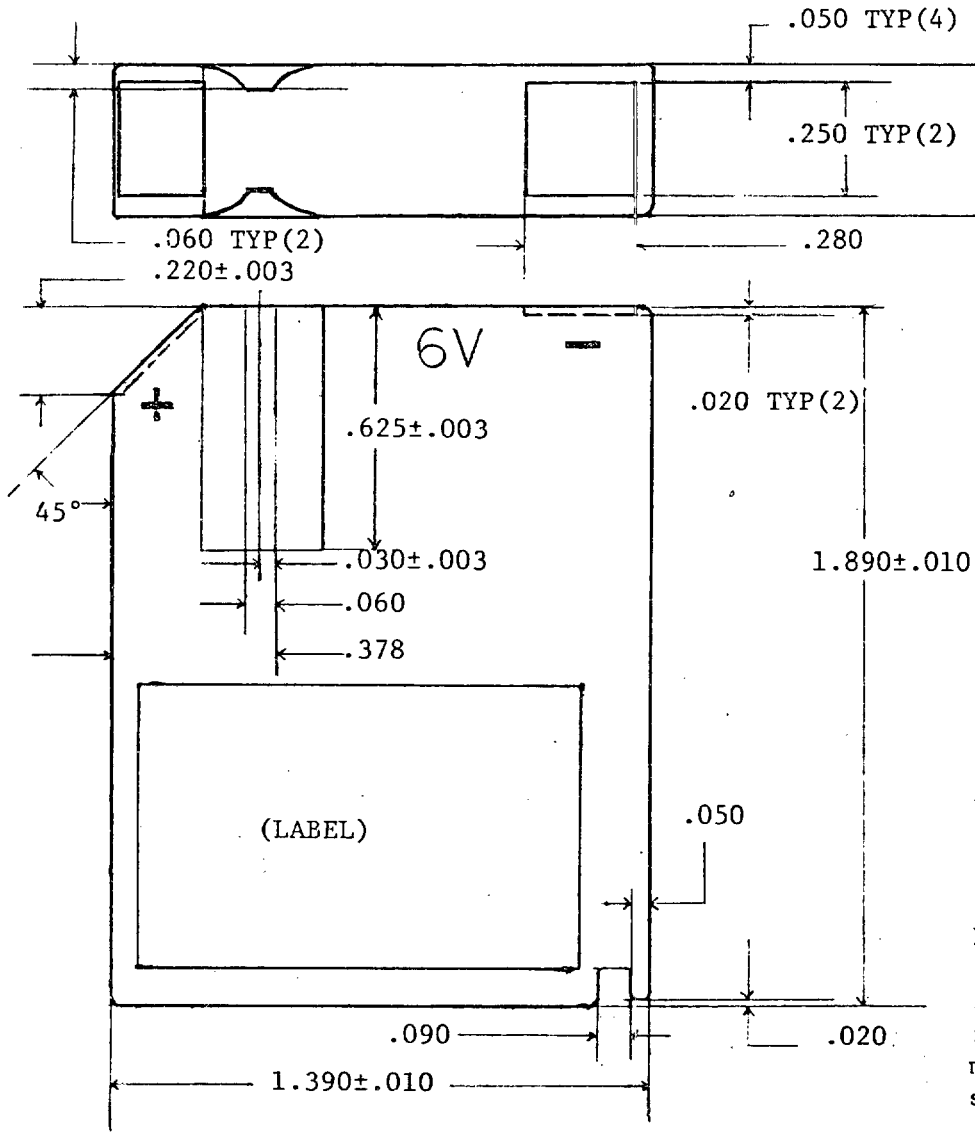

INCHES	MM
.003	.08
.005	.13
.010	.25
.020	.51
.030	.76
.050	1.27
.060	1.55
.090	2.29
.100	2.54
.220	5.59
.250	6.35
.280	7.11
.320	8.13
.350	8.89
.378	9.60
.625	15.88
1.390	35.31
1.890	48.01

NOTE: All dimensions in inches. Unless otherwise specified, tolerance is ±.005. Polarity and voltage markings shall be on the same face with the label.

FIGURE 1. BA-3955/TA BATTERY DIMENSIONS

FSC-6135

☆U.S. GOVERNMENT PRINTING OFFICE: 1983—605-034/4546

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 6.0 volts

Usual number and type of cells: 4 Duracell MN2200 or equal cells

Usual cell connection: Series

Terminals: Flat surface, recessed

Weight(maximum): .075 lbs (.034 Kg)

Volume: .92 cubic inches

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be as specified herein.

First Article inspection:

Vibration test.
Mechanical-shock test.
Insulation-resistance test.
Visual and mechanical(external and internal).
Battery voltage.
Capacity: I, LT, and MLT.

Quality conformance inspection:

Visual and mechanical(external).
Battery voltage.
Vibration test.
Mechanical-shock test.
Capacity: LT, T and D.

Methods of examinations and test:

Capacity tests: See requirements for capacity specified herein.

Test	Storage period	Temperature	Minimum Svce. Req'd(Hrs)
I(Initial 70°F)	48 Hrs Min.	70°F(21°C)	40
LT(0°F)	10 Hrs Min.	0°F(-18°C)	1.0
MLT(32°F)	10 Hrs Min.	32°F(0°C)	18
T	13 Wks plus	113°F(45°C)	
	48 Hrs Min.	70°F(21°C)	35
D	52 Wks	70°F(21°C)	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Moderate Low Temperature Test (MLT). The test shall be performed only on first article samples. This test group, shall consist of 10 samples. They shall be tested within seven days after receipt at Government Laboratory. The first article samples shall be placed in controlled 70°F storage within 72 hours after receipt and in an ambient of 32°F (0°C) at least 10 hours prior to the initiation of discharge. Temperature throughout discharge test and the five hours immediately prior to test shall be 32 ± 3°F (0 ± 5°C). Deviation within ±10°F (±18°C) will be allowed providing these deviations do not exist for more than 5% (cumulative) of the specified discharge to specified end voltage period.

Low Temperature Test (LT). The test shall be performed on first article samples and production lot samples. Sample size for first article tests shall be ten (10). Production lot sample size shall be twenty-five (25). The tests shall be performed within seven (7) days after receipt at Government Laboratory. Samples shall be placed in controlled 70°F (21°C) storage within 72 hours after receipt and in an ambient of 0°F (-18°C) at least ten hours prior to initiation of discharge. Temperature throughout discharge test and the five hours immediately prior to test shall be 0°F (-18°C). Deviation within ±10°F (±18°C) will be allowed providing these deviations do not exist for more than 5% (cumulative) of the specified discharge to specified end voltage period.

Discharge - The battery shall be discharged through 424 ohms continuously to an end voltage of 3.6 volts.

Custodian:
Army - ER

Preparing Activity:
Army - ER

(Project No. 6135-A164)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.