MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, STRAIGHT-THRU, FOR MULTILAYERED PRINTED WIRING BOARDS (.100 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.


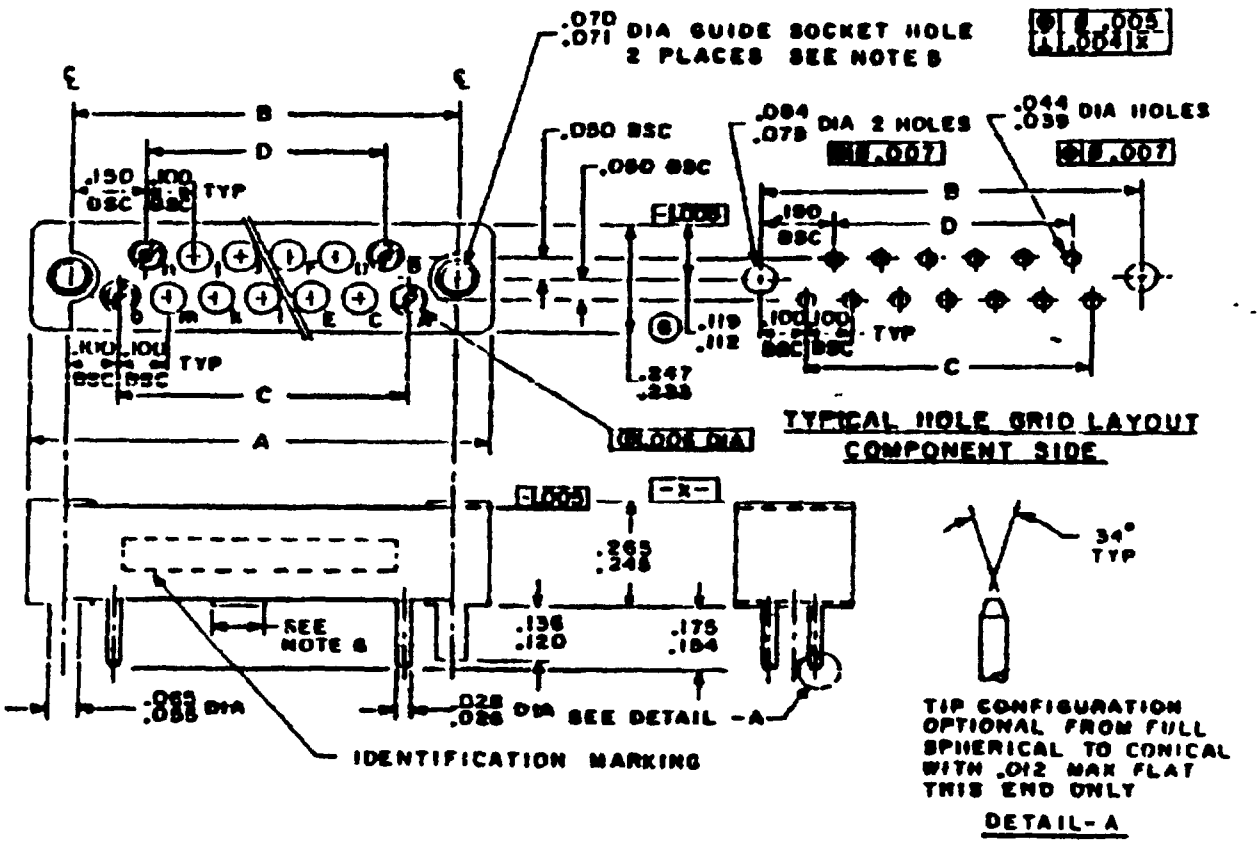


FIGURE 1. Connectors, receptacle (.100 spacing).

Ⓖ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

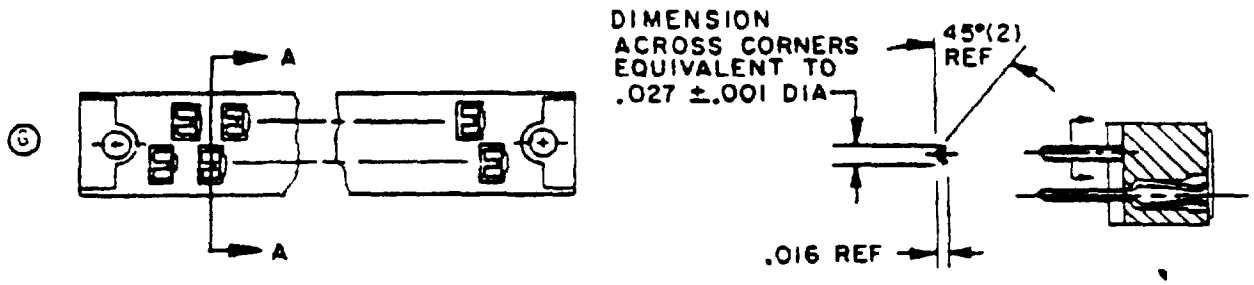

⑥ ALTERNATE CONTACT CONSTRUCTION

TABLE I. Dimensions and dash numbers.

Dash No.	No. of contacts	A ±.010	B Basic	C Ref	D Ref
01	9	.750	.600	.400	.300
02	17	1.150	1.000	.800	.700
03	25	1.550	1.400	1.200	1.100
04	33	1.950	1.800	1.600	1.500
05	41	2.350	2.200	2.000	1.900
06	77	4.150	4.000	3.800	3.700

FIGURE 1. Connectors, receptacle (.100 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
001	0 03	.044	1 12	120	3.05	600	15.24	1.600	40 64
004	0.10	.050	1 27	136	3 45	700	17 78	1 800	45 72
005	0 13	055	1 40	150	3 81	750	19.05	1 900	48 26
006	0.15	065	1 65	154	3.91	.800	20 32	1 950	49 53
007	0 18	070	1 78	175	4 44	1.000	25 40	2 000	50 80
.012	0.30	071	1 80	233	5 92	1 100	27 94	2.220	56 39
016	0.40	079	2 01	245	6.22	1 150	29.21	2 350	59.69
026	0.66	084	2 13	247	6.27	1 200	30.48	3 700	93 98
027	0.69	100	2 54	265	6 73	1 400	35 56	3 800	96 52
028	0 71	112	2 84	300	7 62	1 500	38.10	4.000	101 60
039	0 99	119	3 02	.400	10.16	1.550	39.37	4 150	105 41

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and $\pm 2^{D}$ on angles.
4. These connectors mate with connectors specified in MIL-C-55302/4 and MIL-C-55302/5, and are primarily for use with multilayered printed wiring boards.
5. Positional tolerances of guide pins shall apply at datum plane X.
6. Pad(s) suitable for printed circuit board support are required. Dimensions and locations are optional.

FIGURE 1. Connectors, receptacle (.100 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1

Material

Guide pins and guide bushings Brass composition B, 60,000 to 70,000 lbf/in^2 tensile, as specified in QQ-W-321, or FC brass as specified in QQ-B-626.

Plating

(G) Guide pins and guide bushings Copper alloy per QQ-W-321, ASTM B-134, QQ-B-626 or ASTM B16.

(G) Contact Gold overall per MIL-G-45204, type II, grade C, class 1, over nickel plating per QQ-N-290, class 2, 50 to 150 microinches, or localized contact finish with contact engagement end gold plated with type II, class 1, grade C per MIL-G-45204 over nickel underplate, class 2, 30 to 150 microinches as specified in QQ-N-290, and contact termination end plating tin lead (50% to 70%) composition 100 microinches minimum thickness per MIL-P-81728 over nickel underplate per 3.3.3.4.2. Solder dipping is permitted providing it meets procedures and requirements of MIL-STD-202, method 208.

Contact identification: Shall be alphabetical and sequential in the pattern indicated, using upper case characters followed by lower case characters. Dash number 06. The characters shall be numerical and sequential in pattern indicated.

Pin size. 23.

Wire size 22

Current rating 5 amperes maximum.

Oversize pin exclusion: Not applicable.

Mating and unmating The maximum insertion force, in pounds shall not exceed a value equal to .5 times the number of contacts.

Contact engagement and separation forces: The individual contact withdrawal force shall be .5 ounce minimum when tested with a minimum diameter test pin per MS3197-23X1.

Contact resistance The average resistance of all contact pairs measured shall not exceed .010 ohm, and no individual contact pair shall have a resistance exceeding .020 ohm

Dielectric withstanding voltage:

Sea level 1,000 volts rms, 60 Hz, ac.

High altitude: 500 volts rms, 60 Hz, ac.

Part number M55302/6- (dash number from figure 1)

Replacement data: The connectors covered by this specification were formerly identified with printed circuits as UPC-100-FS-( )

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

Custodians
Army - CR
Navy - EC
Air Force - 17

Review activities
Army - MI
Navy - AS
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - AT, AV
Navy - MC, OS, SH
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3641)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.