INCH-POUND
MIL-F-62422A(AT)
AMENDMENT 1
12 Feb 1992

MILITARY SPECIFICATION
FILTER, LASER HAZARD PROTECTION

This amendment forms a part of MIL-F-62422A(AT), dated 31 May 1991, and is approved for use by the U.S. Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1.2 Add the following:

"Dwg. no. 12370300 Filter
Dwg. no. 12370324 Filter
Dwg. no. 7641866 Surface Quality Standards for Optical Elements"

PAGE 3

3.3 Delete and substitute:

"3.3 Construction. The filter shall be manufactured in accordance with drawing no. 12357797, 12357801, 12357857, 12370300, or 12370324."

PAGE 5

4.2 Add the following sentence: "The filter manufacturer shall be responsible for conducting certification tests."

4.2.1, lines 4 and 5: delete ", and witnessed by Government representatives"

PAGE 6

Add as new paragraph 4.3.2:

"4.3.2 First Article Samples. First article samples shall be three randomly selected filters of each type to be manufactured. The filters shall be selected from a full chamber run."

PAGE 10

Add as new paragraph 4.5.1.1:

AMSC N/A This document contains no deliverable data requirements FSC 6650
DISTRIBUTION STATEMENT A. Approved for public release, unlimited distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

"4.5.1.1 Cosmetic - Filters shall show no characteristic(s) which are imperative or distractive to a clear, uniform field of view (FOV); i.e., blemishes or color variations which are discernible/distinguishable when viewed from the normal parameters of the FOV."

PAGE 11

4.6.2.1.2 Delete and substitute:

"4.6.2.1.2 Measurement - This test shall be conducted on the First Article samples. Detector responsivity calibrations are the same as those in Section 4.6.1.2. Each filter shall then be tested at a wavelength of 694 nm (see paragraph 3.5.1) using a linearly polarized laser with a collimated beam diameter of no less than 3 mm (FWHM). The energy distribution over the area of the laser pulse shall be a gaussian shape. Measurements of the noise level (flash tube pulse but no laser light to the detectors) without the filter in the optical train, shall be a reading recorded as an average of at least 100 pulses. The value of 100 pulses is used assuming that the minimum value achieved with the filter in the optical train is 1.5 orders of magnitude above the noise level. Similarly, readings 1 through 4 shall be values recorded as an average of at least 100 pulses (see 4.6.2.5 for exemption to 100 pulse requirement). All readings 4.6.2.1.2.2 through 4.6.2.1.2.4 shall be laser energy transmitted through different areas of the filter as shown in paragraph 4.6.6, Figure 2, except that only one center point shall be used. The laser energy incident on the filter shall be "P" polarized (minimum 100:1 ratio of "P" to "S"). The measurements shall be made such that the beam incident energy spreads in the fashion depicted by the rectangles in Figure 2."

4.6.2.1.2.1 Delete and substitute:

"4.6.2.1.2.1 Reading 1. The laser energy incident on the filter is measured. This can be performed directly or using a calibrated beamsplitter as in Figure 1 and then calculating the energy incident on the filter. If the reading is performed directly the laser energy incident on the filter must not drift by more than 5%. If a calibrated beamsplitter is used reading 1 shall be performed simultaneously with reading 2, reading 3, or reading 4 as required."

PAGE 12

4.6.2.2 Add the following sentence: "If a laser is used for optical density measurements see 4.6.2.5."


4.6.2.3 Add the following sentence: "If a laser is used to perform the optical density scan, the optical density shall be measured for at least two pulses per angle."

Add as new paragraph 4.6.2.5:

"4.6.2.5 Laser optical density measurements - Unless otherwise specified, all readings shall be recorded as an average of at least 100 pulses. The contractor may reduce the minimum number of pulses averaged from 100 to 10 if it is shown that all 10 single pulse optical density readings are within +/- 5% of the 10 pulse average optical density reading."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:41Z
Check the source to verify that this is the current version before use.

Figure 2 Delete and substitute:

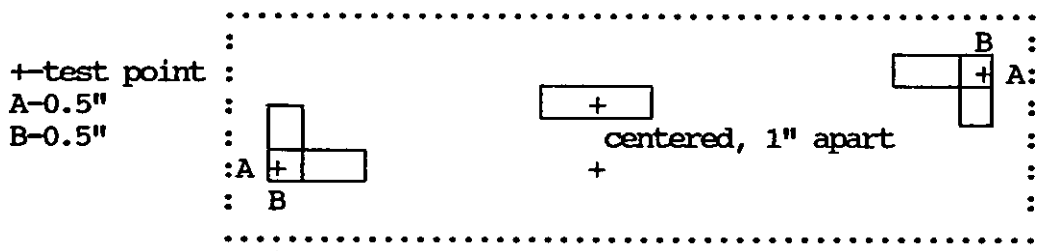

Note: A & B are distances from the edge

FIGURE 2

4.6.8 Add the following sentence: "Filters shall be evaluated using the surface quality standards for optical components drawing no. 7641866."

4.6.9 Add the following sentences: "The energy density values specified in Table V are maximum energy density values. For a gaussian energy distribution the maximum energy density is twice the average energy density."

Add as new paragraphs 4.6.9.1, 4.6.9.1.1, 4.6.9.1.2:

"4.6.9.1 Calculations:

4.6.9.1.1 The average energy density is given by:

$$H_{avg} = \frac{Q}{A_2}$$

where Q is the total pulse energy and A_2 is the area bounded by the $1/e^2$ intensity points.

4.6.9.1.2 The maximum energy density is given by:

$$H_{max} = \frac{Q}{A_1} = 2\ H_{avg}$$

where Q is the total pulse energy and A_1 is the area bounded by the 1/e intensity points."

Custodian:
Army - AT

Preparing Activity:
Army - AT

Project No. (6650-A190)

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:41Z
Check the source to verify that this is the currenversion before use.