METRIC

MIL-C-55681/11A
28 July 1989
SUPERSEDING
DOD-C-55681/11
25 August 1983

MILITARY SPECIFICATION SHEET

CAPACITORS, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY, STYLE CDR35, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55681.

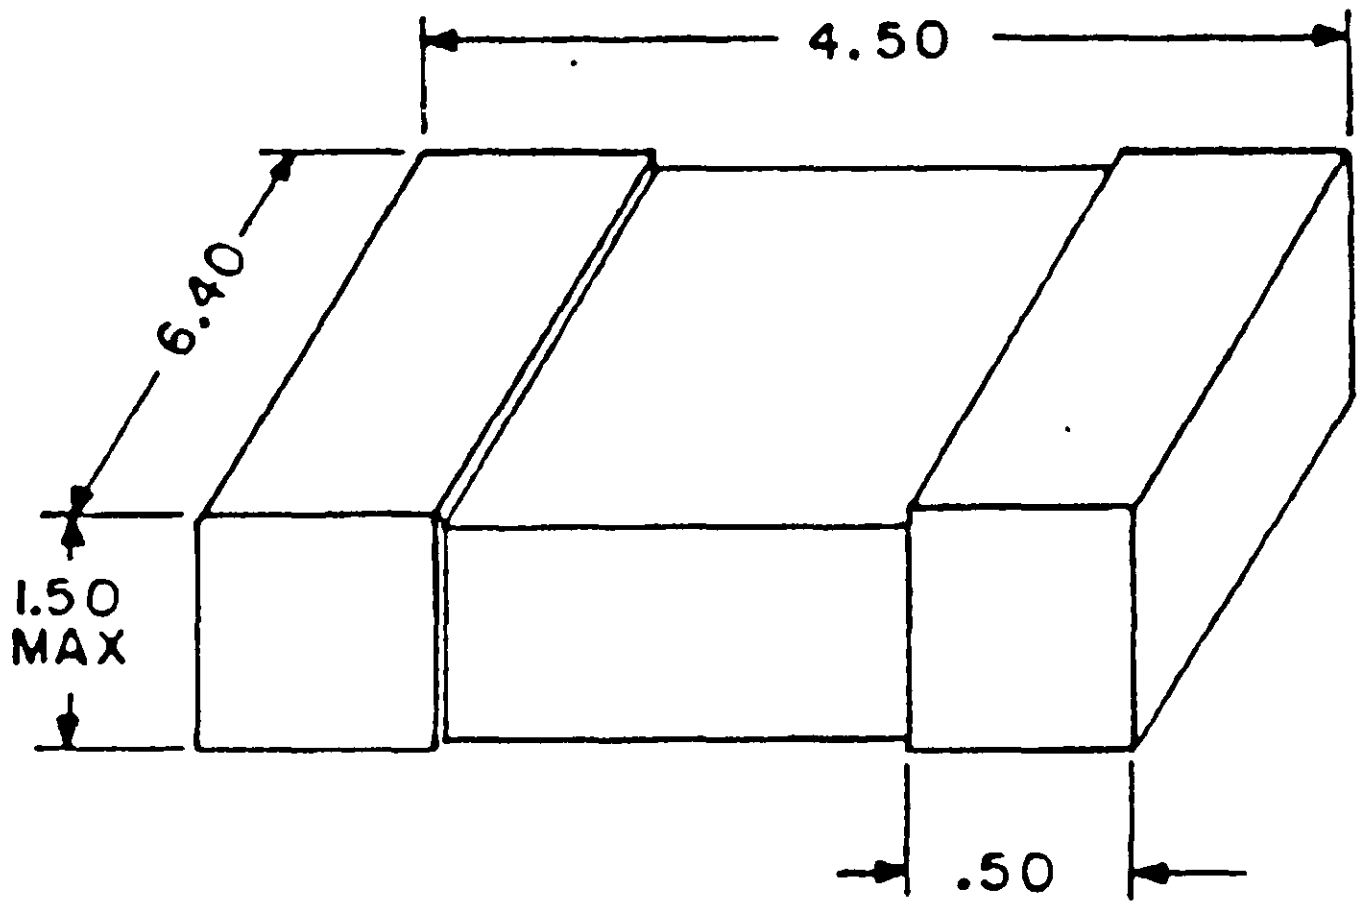

mm	Inches
.25	.010
.30	.012
.50	.020
.60	.023
1.50	.059
4.50	.176
6.40	.250

NOTES:
1. Dimensions are in millimeters.
2. Unless otherwise specified, tolerance is ±.30.
3. Dimensions and tolerances are for bare chips. For solder coated terminations add .60 to the positive length tolerance and .30 to the positive width and thickness tolerance.
4. Inch equivalents are given for general information only.

Ⓐ FIGURE 1. Style CDR35 capacitors.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Body structure: Multilayer, unencapsulated monolithic ceramic.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature range: -55°C to +125°C.

Marking: In accordance with MIL-C-55681.

TABLE I. Style CDR35 capacitor characteristics.

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage
	(pF)			volts, dc
CDR35BP472B---	4,700	F, J, K	BP	100
CDR35BP512B---	5,100	"	"	"
CDR35BP562B---	5,600	"	"	"
CDR35BP622B---	6,200	"	"	"
CDR35BP682B---	6,800	"	"	"
CDR35BP752B---	7,500	"	"	"
CDR35BP822B---	8,200	"	"	"
CDR35BP912B---	9,100	"	"	"
CDR35BP103B---	10,000	"	"	"
CDR35BP113A---	11,000	"	"	50
CDR35BP123A---	12,000	"	"	"
CDR35BP133A---	13,000	"	"	"
CDR35BP153A---	15,000	"	"	"
CDR35BP163A---	16,000	"	"	"
CDR35BP183A---	18,000	"	"	"
CDR35BP203A---	20,000	"	"	"
CDR35BP223A---	22,000	"	"	"
CDR35BX563B---	56,000	K, M	BX	100
CDR35BX683B---	68,000	"	"	"
CDR35BX823B---	82,000	"	"	"
CDR35BX104B---	100,000	"	"	"
CDR35BX124B---	120,000	"	"	"
CDR35BX154B---	150,000	"	"	"
CDR35BX184A---	180,000	"	"	50
CDR35BX224A---	220,000	"	"	"
CDR35BX274A---	270,000	"	"	"
CDR35BX334A---	330,000	"	"	"
CDR35BX394A---	390,000	"	"	"
CDR35BX474A---	470,000	"	"	"

1/ The complete Part or Identifying Number will include additional symbols to indicate capacitance tolerance, termination and failure rate level.

CONCLUDING MATERIAL

Custodians:
  Army - ER
  Navy - EC
  Air Force - 85

Review activities:
  Navy - AS, OS
  Air Force - 17, 99
  DLA - ES

User activities:
  Navy - MC, SH
  Air Force - 19

Preparing activity:
  Army - ER

Agent:
  DLA - ES

(Project 5910-1651-5)