MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV,
40 PIN, STRAIGHT THROUGH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contact assemblies described herein shall consist of this specification and the latest issue of MIL-C-28754.

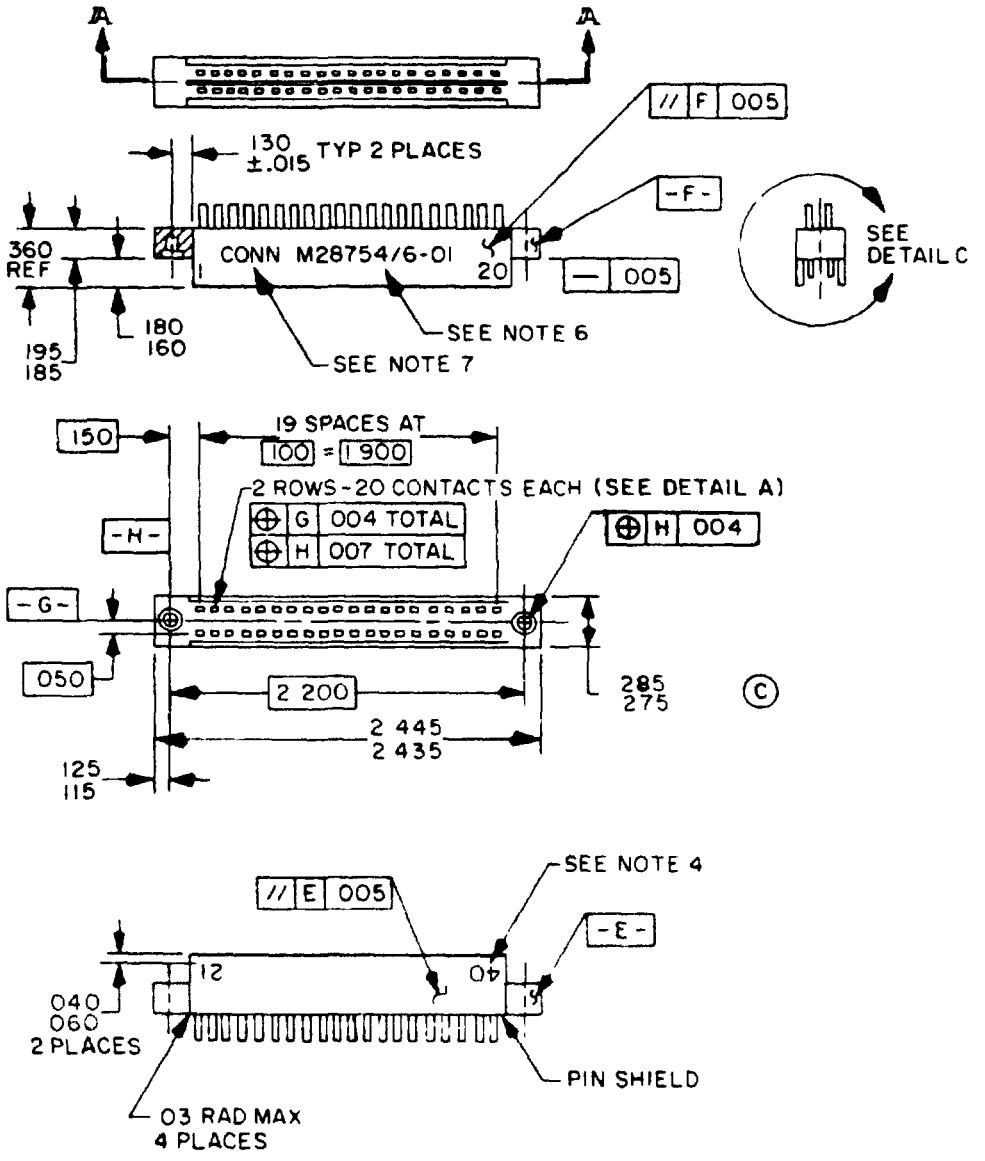


FIGURE 1 Dimensions and configurations

C denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.


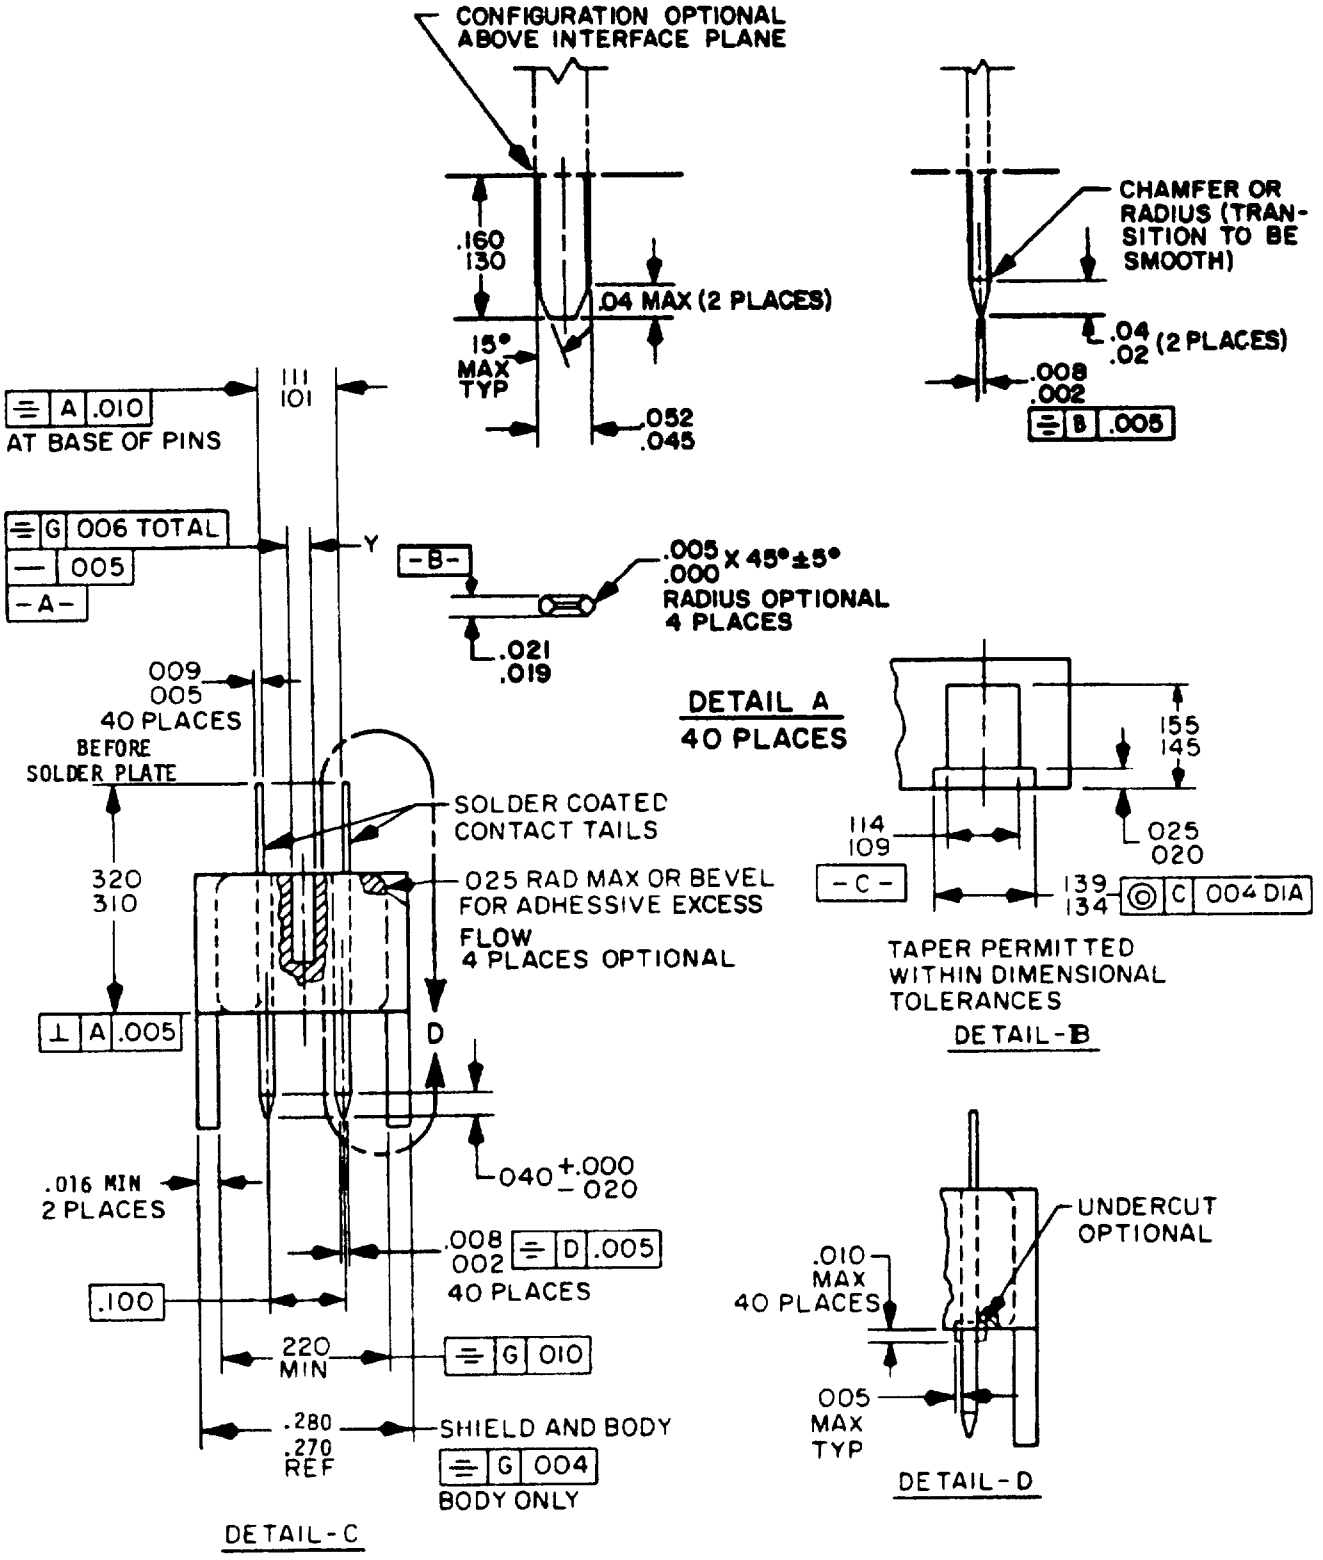


FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

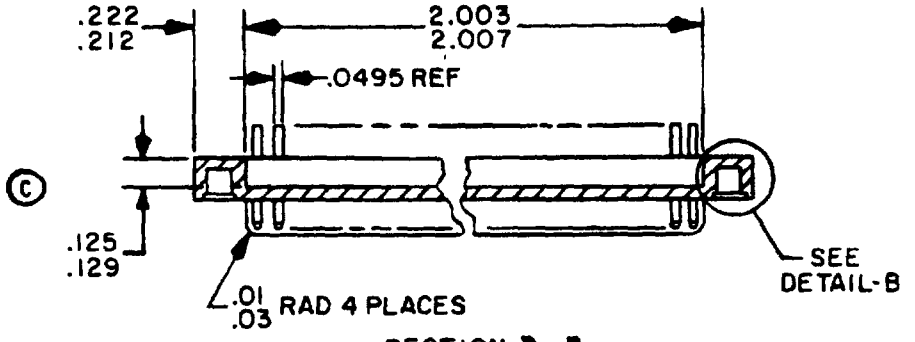

SECTION A-A

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.047	1.19	.126	3.20	.220	5.59
004	.10	.0495	1.26	.129	3.28	.222	5.64
.005	.13	.050	1.27	.130	3.30	.270	6.86
.006	.15	.052	1.32	.134	3.40	.280	7.11
.007	.18	.060	1.52	.139	3.53		
.008	.20	.096	2.44	.145	3.68	.310	7.87
.009	.23	.100	2.54	.150	3.81	.320	8.13
.010	.25	.101	2.57	.155	3.94	.360	9.14
.015	38	.109	2.77	.160	4.06	1.900	48 26
019	.48	.111	2.82	.180	4.57	2.003	50.88
.020	.51	.114	2.90	.185	4.70	2.007	50.98
.021	.53	.115	2.92	.195	4.95	2.200	55.88
025	.64	.125	3.18	.212	5.38	2.435	61 85
.03	.76					2.445	62.10
.040	1.02						
.045	1.14						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on 3 place decimals and ±.01 on 2 place decimals and ±2° on angles.
4. Contact numbers 1, 20, 21 and 40 shall be marked on pin shield in color contrasting characters, .06 inch high.
5. Flash around blade contacts not to exceed .010 from the body and shall be firmly attached.
6. Mark in this area in color contrasting characters, .06 inch high.
7. The letters CONN are to be marked in color contrasting characters, .06 inch high and are to proceed the military part number but are not to be included in the part number.
8. The line referred to as -G- designates a plane passing through the axis of the two .114 +.000 -.005 diameter keying pin holes.

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration. See figure 1.

Contacts. See figure 1.

Plating: Contact plating shall be per MIL-C-28754. Solder coated contact tail shall be tinned (see detail C) with solder to a thickness of 0.0005 inch to 0.003 inch and solder shall cover tails. Solder used shall be in accordance with QQ-S-571, type Sn60, form B, type S. A noncorrosive flux may be used per MIL-F-14256, type RMA.

Pin shields:

Dash numbers 01 and 02: Aluminum alloy, 3/4 hard in accordance with QQ-A-250. Anodized black in accordance with MIL-A-8625, type II, class 2.

Dash numbers 03 and 04 (insulated): Aluminum alloy, 3/4 hard in accordance with QQ-A-250. Anodized black in accordance with MIL-A-8625, type III, class 2.

Alternate material: Unclad epoxy glass laminate in accordance with MIL-P-13949, type GF.

Contact resistance Voltage drop shall not exceed 20 millivolts.

Solderability: In accordance with MIL-C-28754.

Current rating: 3 amperes.

Temperature rating: -55°C to +105°C.

Voltage rating. 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/6- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 2818331, code identification number 10001.

C TABLE I. Dash numbers and dimensions.

Dash no.	Y
01 1/	.058 (1.47) .062 (1.57)
02 1/	.031 (.79) .035 (.89)
03	.058 (1.47) .062 (1.57)
04	.031 (.79) .035 (.89)

1/ Inactive for new design.
Use -03 and -04.

CAUTION The supersession information is valid as of the date of this revision. The QPL associated with this inactive for new design note will be maintained until acquisition of the product is no longer required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities.
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-6)

☆U.S. GOVERNMENT PRINTING OFFICE 1993-605-034/054

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-28754 16C

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.